

# serrat



**Agricultural Range  
& Green Spaces**

### Pedro Serrat



General Sales Manager

(+34) 649 191 050  
pedro@serrat.es

### Joaquín Serena



Sales Manager  
Spain and Portugal

(+34) 619 226 117  
joaquin@serrat.es

### Mario Paredes



Sales Spain

(+34) 683 630 563  
m.paredes@serrat.es

### Laure Béraud



Export Sales Manager France

(+33) 6 68 193 926  
l.beraud@serrat.es

### Pablo Serna



Sales France

(+34) 636 437 987  
p.serna@serrat.es

### Alessandro Fagnani



Export Sales Manager

Spain: (+34) 646 257 191  
Italy: (+39) 347 4133 836  
alessandro@serrat.es

### Zhanna Siamko



Export Sales Manager

(+34) 686 889 832  
zhanna@serrat.es

### Cristina Serrat



Sales North and South America

(+34) 689 774 258  
cristina@serrat.es

### Pablo Serrat



After Sales and Quality  
Service Manager  
(English)

(+34) 974 417 830  
technicalservice@serrat.es

### Alejandro Conesa



After Sales and Quality  
Service Manager  
(Spanish)

(+34) 974 417 830  
serviciotecnico@serrat.es

### Nicolás Boutonnet




After Sales and Quality Service  
Manager Export  
(French)

(+34) 974 417 830  
recambios@serrat.es


## AGRICULTURAL MULCHERS WITH SWINGING HAMMERS

The base of the hammer is of 80 mm compared with 60 mm of a standard hammer, and that avoids problems generated by the side blows in the bars. (Much more stable). Thanks to the width of Serrat hammer (125 mm) we need fewer elements of cutting to cover the width of the crusher and it means a very important economy at the level of operating costs.

With a mulcher with Serrat hammers we can work on a material until 100 mm of diameter and we save time between 30 % and 40 % and an investment of exploitation of less 30 %.

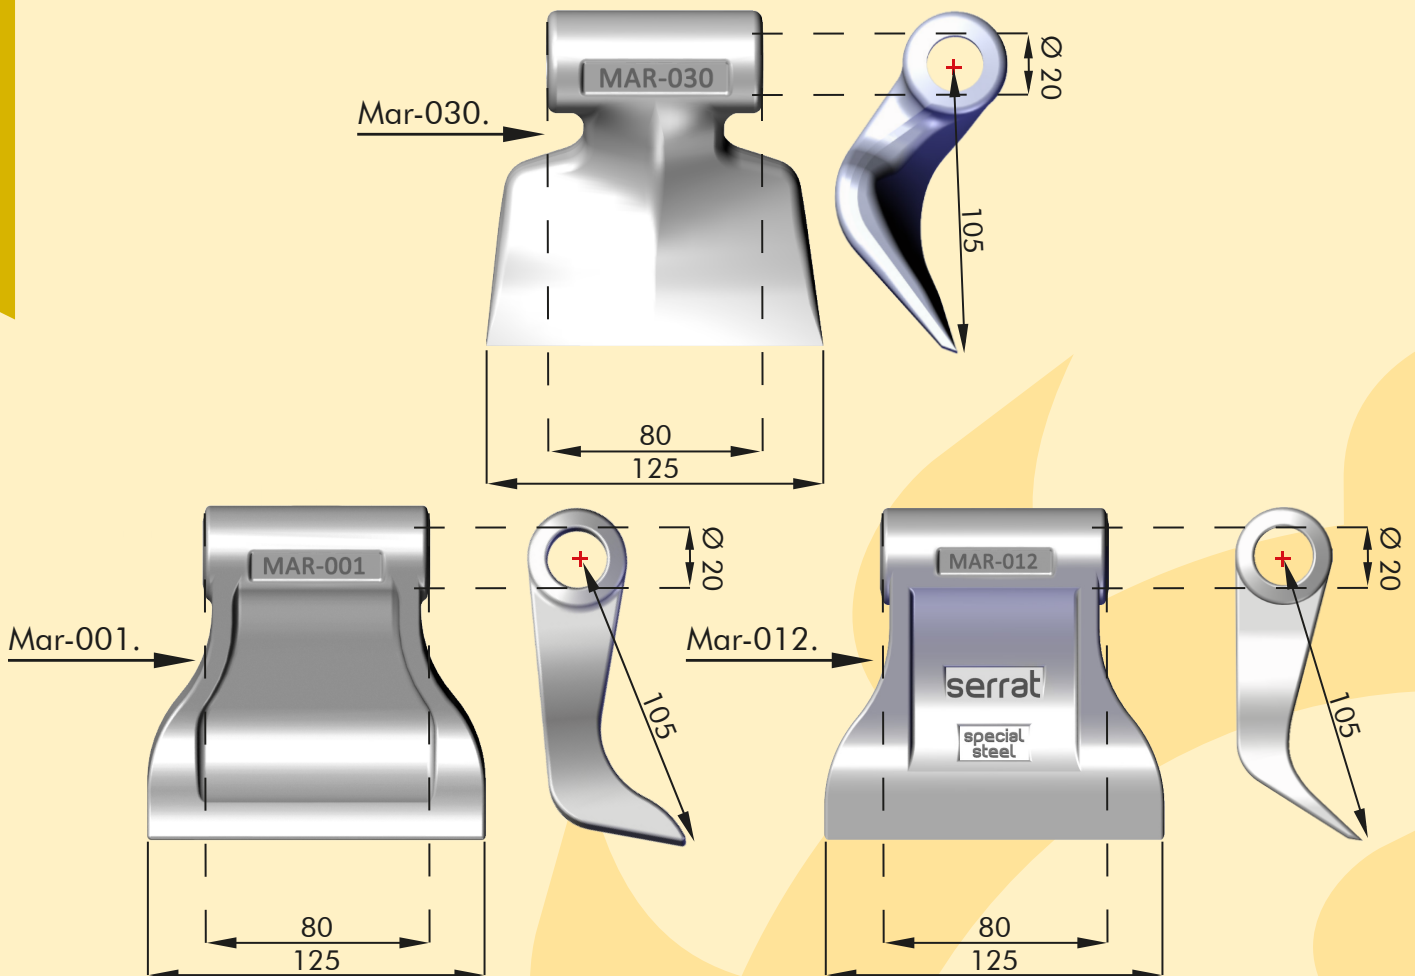

- ▶ Chassis monocoque between 6 mm and 12 mm with entry in staircase and 3 lines of counter hammers allowing to measure the entry of the material as in a funnel and avoiding obstructions of the material after having entered the chamber of grinding, and avoiding projections in the direction of the tractor.
- ▶ The tension of the belts is made by moving axes avoiding the roller tensor and the inverted flexions of the belts. In the part of the rotor there is no breaking point due to the tension of belts considering that the pulley leans on the internal track of the movement and only the axis supports the transmission of the power, not the effort radial nerve made by the belts. The greasing is made by the center of the axis so that the grease divides up in the movement thanks to the centrifugation.
- ▶ Forged and tempered steel hammer. Gearbox Serrat drawn specially for agricultural mulchers, all its bearings are conical ball rollers.

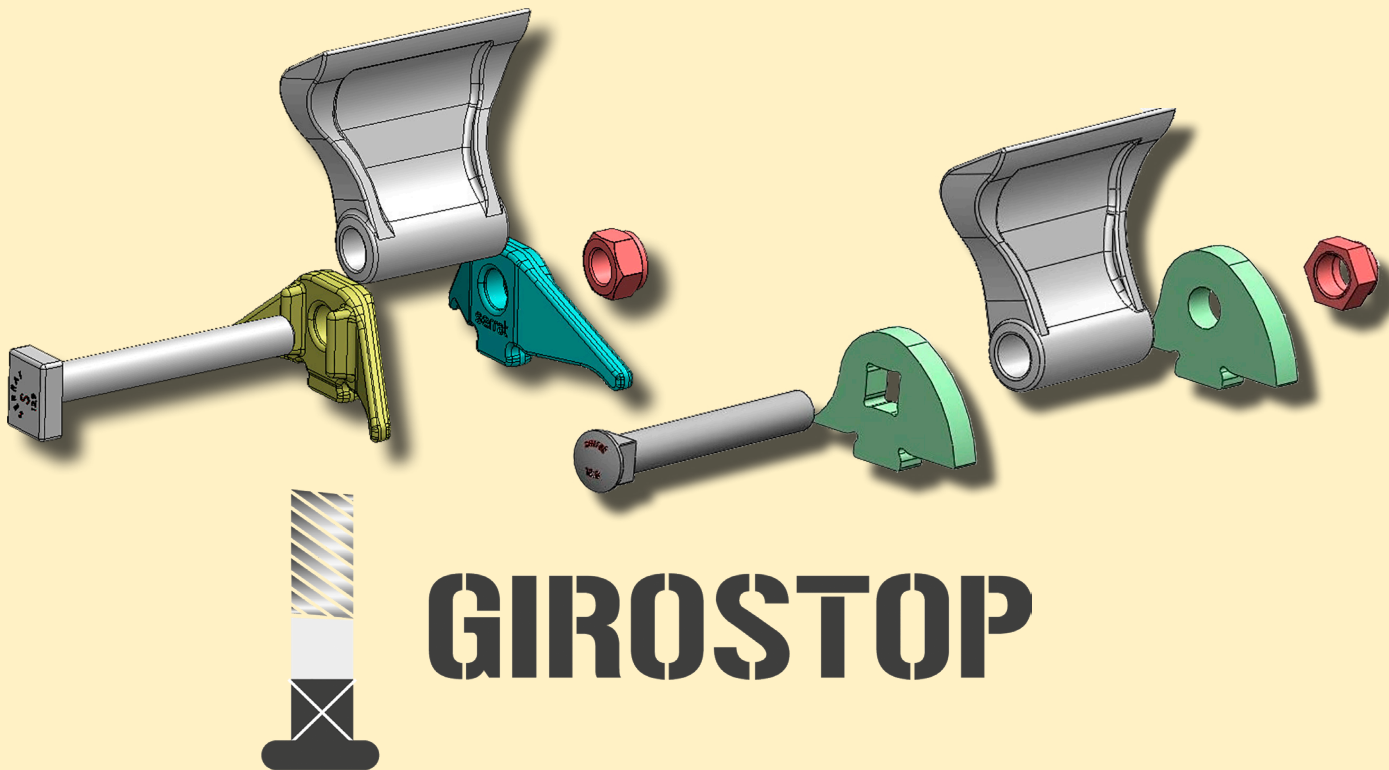

## GIROSTOP

The exclusive hammer coupling system with pivot GIROSTOP is the only one in this type of machines. The advantages are countless and below some of them:

1.<sup>st</sup>- Thanks to its square anchorage head, the pivot GIROSTOP never rotates in the hammer support. This advantage is very important because not turning, the hammer support will never be consumed and if the support in the lower part is not consumed it will increase the reliability of the rotor.

2.<sup>nd</sup>- Thanks to the immobility of the pivot, the hammer is obligated to turn over the pivot and for that we can obtain that the bolt and the hammer do not get jammed because of dust and dirt.

3.<sup>rd</sup>- The completely flat pivot head avoiding twist of cable or grass into it.

4.<sup>th</sup>- Thanks to this immobilization system, the maintenance and the change of the hammers will be much more safe and convenient.



## GEARBOX SERRAT

Gearbox with tapered roller bearings.




## FREEWHEEL

The freewheel is equipped on our machines and gives us the advantage of not transmitting the inertia of the rotor to the tractor's transmission when disengaging the PTO

## ROTOR POLSER

Rotor POLSER, made in a plate of hardox and with a mechanical assembly.

**550  
POLSER**

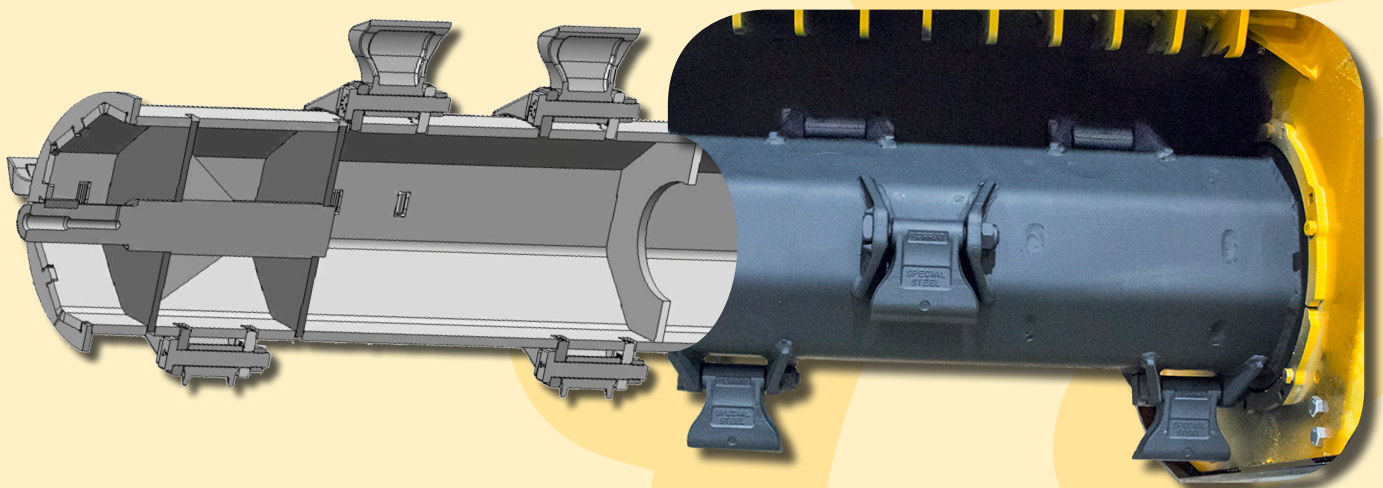







- ▶ Rotor POLSER, made in a plate of hardox and with a mechanical assembly. Ingenious rotor designed and manufactured in an octagonal shape providing more strength when the hammer reverses itself due to impacts.
- ▶ Forged steel supports with high precision position guaranteeing a perfect operation and positioning of the cutting elements.
- ▶ Gear plates of octagonal shape improving the power transmission.
- ▶ Internal plates to structure the rotor.

# PT

- ▶ Tubular rotor of Ø 350 mm.
- ▶ Steel-plate chassis, thickness 4 mm.
- ▶ Forged hammers SERRAT.
- ▶ For tractors between 20 - 40 HP.
- ▶ For material up to Ø 30 mm.
- ▶ Roller Ø 140 mm.




## MODEL







MODEL					N.º BELTS TYPE							
						mm	KW-HP	A mm	A in	B mm	B in	
T-1200	1200	15 - 20 30 - 40	16	260	3 XPB	1276	50"	895	35"	828	33"	540
T-1400	1400	18 - 25 30 - 40	16	275	3 XPB	1476	58"	895	35"	828	33"	540
T-1600	1600	26 - 35 30 - 40	20	295	3 XPB	1676	66"	895	35"	828	33"	540
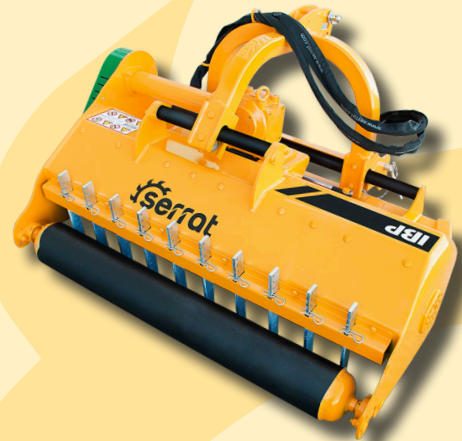
# IBP

- ▶ Tubular rotor of Ø 400 mm.
- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Forged hammers SERRAT special "grass".
- ▶ For tractors between 30 - 80 HP.
- ▶ For material up to Ø 50 mm.
- ▶ Roller Ø 180 mm.









## MODEL

MODEL					N.º BELTS TYPE							
						mm	KW-HP	A mm	A in	B mm	B in	
T-900	900	22 - 30 60 - 80	8	320	3 XPB	1075	42"	1130	44"	1000	39"	540
T-1200	1200	30 - 40 60 - 80	9	365	3 XPB	1375	54"	1130	44"	1000	39"	540
T-1400	1400	34 - 45 60 - 80	12	395	3 XPB	1575	62"	1130	44"	1000	39"	540
T-1600	1600	37 - 50 60 - 80	12	418	3 XPB	1775	70"	1130	44"	1000	39"	540
T-1800	1800	45 - 60 60 - 80	16	430	3 XPB	1975	71"	1130	44"	1000	39"	540
T-2000	2000	52 - 70 60 - 80	16	476	3 XPB	2175	86"	1130	44"	1000	39"	540



## FRONTAL

- ▶ Special configuration for frontal works.
- ▶ Rear hydraulic hood.







MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1300	1300	22 - 30 60 - 80	9	370	4XPB	1495	59"	1155	45"	840	33"	540
T-1400	1400	30 - 40 60 - 80	12	397	4XPB	1595	63"	1155	45"	840	33"	540
T-1600	1600	37 - 50 60 - 80	12	420	4XPB	1795	71"	1155	45"	840	33"	540
T-1800	1800	45 - 60 60 - 80	16	456	4XPB	1995	79"	1155	45"	840	33"	540
T-2000	2000	52 - 70 60 - 80	16	480	4XPB	2195	79"	1155	45"	840	33"	540

## TRIGON

- ▶ Tubular rotor of Ø 420 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 40 - 80 HP.
- ▶ Its fixed configuration allows to choose the position of the gearbox to centre the machine to the work.
- ▶ Roller Ø 180 mm.
- ▶ For material up to Ø 60 mm.




## FIXED







MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1100	1100	29 - 40 60 - 80	8	416	3 XPC	1295	51"	1230	48"	868	34"	540
T-1250	1250	33 - 45 60 - 80	12	453	3 XPC	1445	57"	1230	48"	868	34"	540
T-1400	1400	38 - 50 60 - 80	12	478	3 XPC	1595	63"	1230	48"	868	34"	540
T-1600	1600	40 - 55 60 - 80	12	510	3 XPC	1795	71"	1230	48"	868	34"	540
T-1800	1800	44 - 60 60 - 80	16	555	3 XPC	1995	79"	1230	48"	868	34"	540
T-2000	2000	51 - 70 60 - 80	16	587	3 XPC	2195	86"	1230	48"	868	34"	540

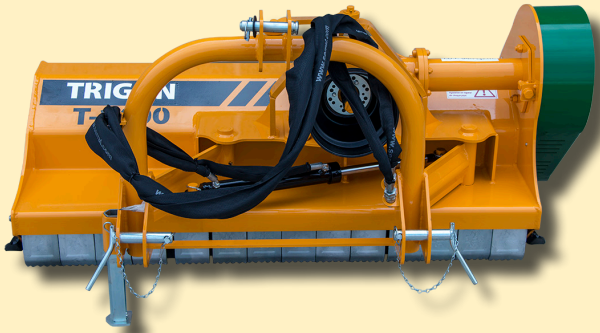


# SIDE SHIFT









- Its moveable composition allows the tractor to circulate along the center of the street and the machine to mulch next to the tree.

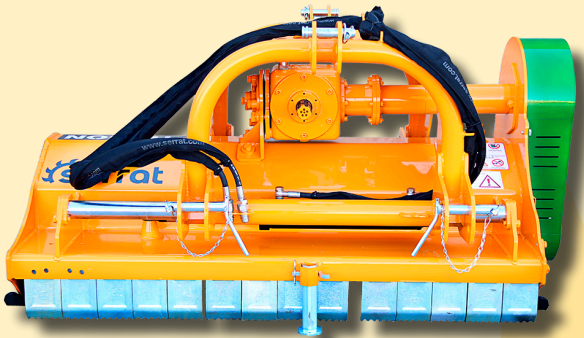MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1250	1250	33 - 45 59 - 80	12	472	3 XPC	1441	57"	1270	50"	867	34"	540
T-1400	1400	37 - 50 59 - 80	12	495	3 XPC	1591	63"	1270	50"	867	34"	540
T-1600	1600	40 - 55 59 - 80	12	525	3 XPC	1791	71"	1270	50"	867	34"	540
T-1800	1800	44 - 60 59 - 80	16	571	3 XPC	1991	78"	1270	50"	867	34"	540
T-2000	2000	51 - 70 59 - 80	16	601	3 XPC	2191	86"	1270	50"	867	34"	540

# REVERSIBLE SIDE SHIFT



- Reversible and movable composition for front and rear PTO or reversible tractors.

MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	37 - 50 59 - 80	12	600	3 XPC	1591	63"	1196	47"	867	34"	540
T-1600	1600	40 - 55 59 - 80	12	630	3 XPC	1791	71"	1196	47"	867	34"	540
T-1800	1800	44 - 60 59 - 80	16	672	3 XPC	1991	78"	1196	47"	867	34"	540
T-2000	2000	51 - 70 59 - 80	16	703	3 XPC	2191	86"	1196	47"	867	34"	540

# EVOLUTION



# FIXED

- ▶ Rotor POLSER of Ø 450 - 480 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 60 - 120 HP.
- ▶ For material up to Ø 80 mm.
- ▶ Roller Ø 180/210 mm.



Agricultural


450  
POLSER



500  
POLSER


MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	45 - 60	12	612	3 XPC	1790	70"	1180	46"	1000	39"	540
		90 - 120										
T-1800	1800	48 - 65	16	662	3 XPC	1990	78"	1180	46"	1000	39"	540
		90 - 120										
T-2000	2000	51 - 70	16	708	3 XPC	2190	86"	1230	48"	1000	39"	540
		90 - 120										
T-2300	2300	59 - 80	20	812	3 XPC	2490	98"	1230	48"	1000	39"	540
		90 - 120										
T-2500	2500	66 - 90	20	937	3 XPC	2690	106"	1290	51"	1000	39"	1000
		90 - 120										
T-2800	2800	81 - 110	24	1025	3 XPC	2990	118"	1290	51"	1000	39"	1000
		90 - 120										

# FIXED WITH REAR HOOD

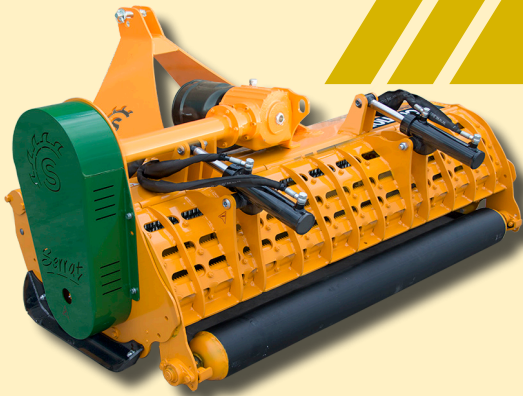



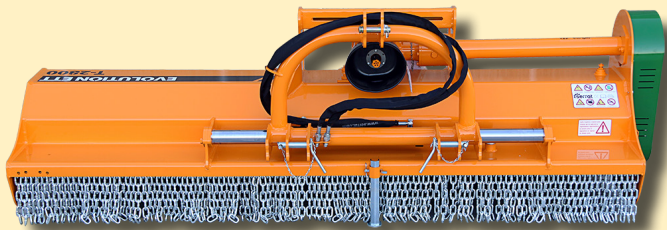



- ▶ Rear hydraulic hood with sieve.

MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	44 - 60	12	612	3 XPC	1790	70"	1180	46"	1000	39"	540
		88 - 120										
T-1800	1800	48 - 65	16	662	3 XPC	1990	78"	1180	46"	1000	39"	540
		88 - 120										
T-2000	2000	51 - 70	16	708	3 XPC	2190	86"	1230	48"	1000	39"	540
		88 - 120										
T-2300	2300	59 - 80	20	812	3 XPC	2490	98"	1230	48"	1000	39"	540
		88 - 120										



## SIDE SHIFT







- Its moveable composition allows the tractor to circulate along the center of the street and the machine to mulch next to the tree.

	MODEL					N° BELTS TYPE							
							mm	KW-HP	A mm	A in	B mm	B in	
450 POLSER	T-1400	1400	44 - 60 88 - 120	12	640	3 XPC	1570	62"	1205	47"	950	37"	540
	T-1600	1600	48 - 65 88 - 120	12	678	3 XPC	1790	70"	1205	47"	1040	41"	540
	T-1800	1800	51 - 70 88 - 120	16	730	3 XPC	1990	78"	1205	47"	1040	41"	540
	T-2000	2000	55 - 75 88 - 120	16	782	3 XPC	2190	86"	1205	47"	1040	41"	540
	T-2100	2100	59 - 80 88 - 120	16	802	3 XPC	2290	90"	1205	47"	1040	41"	540
	T-2300	2300	63 - 85 88 - 120	20	889	3 XPC	2490	98"	1205	47"	1040	41"	540
500 POLSER	T-2500	2500	70 - 95 88 - 120	20	1022	3 XPC	2690	106"	1290	51"	1320	52"	1000
	T-2800	2800	74 - 100 88 - 120	24	1105	3 XPC	2990	118"	1290	51"	1320	52"	1000

## SIDE SHIFT WITH REAR HOOD



- Rear hydraulic hood with sieve.

	MODEL					N° BELTS TYPE							
							mm	KW-HP	A mm	A in	B mm	B in	
	T-1400	1400	44 - 60 88 - 120	12	640	3 XPC	1570	62"	1205	47"	950	37"	540
	T-1600	1600	48 - 65 88 - 120	12	678	3 XPC	1790	70"	1205	47"	1040	41"	540
	T-1800	1800	51 - 70 88 - 120	16	730	3 XPC	1990	78"	1205	47"	1040	41"	540
	T-2000	2000	55 - 75 88 - 120	16	782	3 XPC	2190	86"	1205	47"	1040	41"	540
	T-2100	2100	59 - 80 88 - 120	16	802	3 XPC	2490	98"	1205	47"	1040	41"	540
	T-2300	2300	63 - 85 88 - 120	20	889	3 XPC	2690	106"	1205	47"	1040	41"	540







# REVERSIBLE SIDE SHIFT



► Reversible and movable composition for front and rear PTO or reversible tractors.

450  
POLSER

500  
POLSER







MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	44 - 60 88 - 120	12	810	3 XPC	1790	70"	1450	57"	950	37"	540
T-1800	1800	48 - 65 88 - 120	16	861	3 XPC	1990	78"	1450	57"	950	37"	540
T-2000	2000	51 - 70 88 - 120	16	916	3 XPC	2190	86"	1450	57"	950	37"	540
T-2300	2300	59 - 80 88 - 120	20	1023	3 XPC	2490	98"	1450	57"	950	37"	540
T-2500	2500	66 - 90 88 - 120	20	1152	3 XPC	2690	106"	1450	57"	980	39"	1000
T-2800	2800	74 - 100 88 - 120	24	1235	3 XPC	2990	118"	1450	57"	980	39"	1000



# GREEN

► In a single passage is capable of cutting and pouring the grass at the feet of fruit trees or vineyards, and that without any additional cost in time of work.







► 1 or 2 side exit.

MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	48 - 65 88 - 120	12	790	3 XPC	1660	65"	1560	61"	1000	39"	540
T-1600	1600	51 - 70 88 - 120	12	840	3 XPC	1860	74"	1560	61"	1000	39"	540
T-1800	1800	55 - 75 88 - 120	16	900	3 XPC	2060	81"	1560	61"	1000	39"	540
T-2000	2000	63 - 85 88 - 120	16	957	3 XPC	2260	89"	1560	61"	1000	39"	540
T-2100	2100	70 - 95 88 - 120	16	980	3 XPC	2360	93"	1560	61"	1000	39"	540
T-2300	2300	74 - 100 88 - 120	20	1.000	3 XPC	2560	100"	1560	61"	1000	39"	540



# FRONTAL

- ▶ Special configuration for frontal works.
- ▶ Rear hydraulic hood.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	45 - 60 90 - 120	12	720	3 XPC	1825	72"	1035	41"	995	39"	1.000
T-1800	1800	45 - 60 90 - 120	16	785	3 XPC	2025	80"	1035	41"	995	39"	1.000
T-2000	2000	45 - 60 90 - 120	16	875	3 XPC	2225	88"	1055	42"	995	39"	1.000
T-2300	2300	45 - 60 90 - 120	20	1050	3 XPC	2525	99"	1385	55"	1060	42"	1.000






# PRO



# FIXED









- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 60 - 130 HP.
- ▶ For material up to Ø 100 - 120 mm.
- ▶ Roller Ø 180/210 mm.
- ▶ 3 lines of counter hammers.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1250	1250	44 - 60 96 - 130	12	618	3 XPC	1446	57"	1289	51"	948	37"	540
T-1400	1400	48 - 65 96 - 130	12	650	3 XPC	1596	63"	1289	51"	948	37"	540
T-1500	1500	51 - 70 96 - 130	12	680	3 XPC	1695	67"	1289	51"	948	37"	540
T-1600	1600	55 - 75 96 - 130	12	705	3 XPC	1796	71"	1289	51"	954	38"	540
T-1800	1800	59 - 80 96 - 130	16	770	3 XPC	1997	79"	1298	51"	954	38"	540
T-2000	2000	63 - 85 96 - 130	16	888	4 XPC	2206	87"	1344	53"	1056	42"	540
T-2300	2300	66 - 90 96 - 130	20	980	4 XPC	2506	99"	1344	53"	1106	43"	540
T-2500	2500	70 - 95 96 - 130	20	1038	4 XPC	2706	106"	1344	53"	1120	44"	1000
T-2800	2800	74 - 100 96 - 130	28	1188	4 XPC	3005	118"	1344	53"	1164	46"	1000
T-3000	3000	79 - 105 96 - 130	32	1280	4 XPC	3237	127"	1344	53"	1164	46"	1000
T-3200	3200	81 - 110 96 - 130	32	1388	4 XPC	3437	135"	1344	53"	1164	46"	1000









## FIXED WITH REAR HOOD

- ▶ Rear hydraulic hood with sieve.
- ▶ 11 lines of counter hammers.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	48 - 65 96 - 130	12	853	3 XPC	1621	64"	1345	53"	1150	45"	540
T-1500	1500	51 - 70 96 - 130	12	880	3 XPC	1721	68"	1345	53"	1150	45"	540
T-1600	1600	55 - 75 96 - 130	12	913	3 XPC	1821	72"	1345	53"	1150	45"	540
T-1800	1800	59 - 80 96 - 130	16	986	3 XPC	2021	80"	1345	53"	1150	45"	540
T-2000	2000	63 - 85 96 - 130	16	1079	4 XPC	2221	87"	1345	53"	1150	45"	540
T-2300	2300	66 - 90 96 - 130	20	1175	4 XPC	2521	99"	1345	53"	1150	45"	540









## SIDE SHIFT

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	48 - 65 96 - 130	12	750	3 XPC	1596	63"	1275	50"	1070	42"	540
T-1500	1500	51 - 70 96 - 130	12	775	3 XPC	1695	67"	1275	50"	1070	42"	540
T-1600	1600	55 - 75 96 - 130	12	800	3 XPC	1796	71"	1275	50"	1070	42"	540
T-1800	1800	59 - 80 96 - 130	16	860	3 XPC	1997	79"	1275	50"	1070	42"	540
T-2000	2000	63 - 85 96 - 130	16	1003	4 XPC	2206	87"	1329	52"	1070	42"	540
T-2300	2300	66 - 90 96 - 130	20	1077	4 XPC	2506	99"	1329	52"	1070	42"	540
T-2500	2500	70 - 95 96 - 130	20	1135	4 XPC	2706	106"	1329	52"	1070	42"	1000
T-2800	2800	74 - 100 96 - 130	28	1330	4 XPC	3028	119"	1329	52"	1070	42"	1000

# SIDE SHIFT WITH REAR HOOD









- ▶ Rear hydraulic hood with sieve.
- ▶ 11 lines of counter hammers.
- ▶ Hidraulic lateral offset.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1500	1500	51 - 70 96 - 130	12	960	3 XPC	1721	68"	1345	53"	1147	45"	540
T-1600	1600	55 - 75 96 - 130	12	991	3 XPC	1821	72"	1345	53"	1147	45"	540
T-1800	1800	59 - 80 96 - 130	16	1073	3 XPC	2021	80"	1345	53"	1147	45"	540
T-2000	2000	63 - 85 96 - 130	16	1164	4 XPC	2221	87"	1345	53"	1147	45"	540
T-2300	2300	66 - 90 96 - 130	20	1238	4 XPC	2521	99"	1345	53"	1147	45"	540
T-2500	2500	70 - 95 96 - 130	20	1325	4 XPC	2721	107"	1346	53"	1148	45"	1000



# REVERSIBLE

- ▶ Reversible for front and rear PTO or reversible tractors.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1250	1250	44 - 60 96 - 130	12	680	3 XPC	1446	57"	1295	51"	1221	48"	540
T-1400	1400	48 - 65 96 - 130	12	718	3 XPC	1596	63"	1295	51"	1221	48"	540
T-1500	1500	51 - 70 96 - 130	12	746	3 XPC	1696	67"	1295	51"	1221	48"	540
T-1600	1600	55 - 75 96 - 130	12	783	3 XPC	1796	71"	1295	51"	1221	48"	540
T-1800	1800	59 - 80 96 - 130	16	844	3 XPC	1997	79"	1295	51"	1221	48"	540
T-2000	2000	63 - 85 96 - 130	16	960	4 XPC	2206	87"	1330	52"	1225	48"	540
T-2300	2300	66 - 90 96 - 130	20	1058	4 XPC	2506	99"	1330	52"	1225	48"	540
T-2500	2500	70 - 95 96 - 130	20	1130	4 XPC	2706	107"	1330	52"	1225	48"	1000



# REVERSIBLE SIDE SHIFT

- Reversible and movable composition for front and rear PTO or reversible tractors.

MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-1500	1500	51 - 70 96 - 130	12	895	3 XPC	1696	67"	1336	53"	1080	43"	540
T-1600	1600	55 - 75 96 - 130	12	916	3 XPC	1796	71"	1336	53"	1080	43"	540
T-1800	1800	59 - 80 96 - 130	16	976	3 XPC	1997	79"	1336	53"	1080	43"	540
T-2000	2000	63 - 85 96 - 130	16	1105	4 XPC	2206	87"	1336	53"	1080	43"	540
T-2300	2300	66 - 90 96 - 130	20	1220	4 XPC	2506	99"	1336	53"	1080	43"	540
T-2500	2500	70 - 95 96 - 130	20	1252	4 XPC	2706	106"	1336	53"	1080	43"	540
T-2800	2800	74 - 100 96 - 130	28	1420	4 XPC	3006	118"	1336	53"	1080	43"	1000



# VIÑA

- For tractors between 50 - 110 HP.
- Rear tine retainers.
- Side plates.
- Rear gum over the roller.

MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-1100	1100	37 - 50 81 - 110	8	650	3 XPC	1350	53"	1700	67"	1130	44"	540
T-1250	1250	44 - 60 81 - 110	12	700	3 XPC	1500	59"	1700	67"	1130	44"	540
T-1500	1500	51 - 70 81 - 110	12	770	3 XPC	1750	69"	1700	67"	1130	44"	540
T-1600	1600	55 - 75 81 - 110	12	795	3 XPC	1850	73"	1700	67"	1130	44"	540
T-1800	1800	59 - 80 81 - 110	16	860	3 XPC	2050	81"	1700	67"	1130	44"	540
T-2000	2000	63 - 85 81 - 110	16	941	3 XPC	2250	89"	1700	67"	1130	44"	540
T-2300	2300	66 - 90 81 - 110	20	1035	3 XPC	2550	100"	1700	67"	1130	44"	540



# PRO +









# FIXED

- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 80 - 150 HP.
- ▶ For material up to Ø 150 mm.
- ▶ 3 lines of counter hammers.









## MODEL

MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-2000	2000	59 - 80 112 - 150	16	1103	4 XPC	2237	88"	1531	60"	1200	47"	1000
T-2300	2300	66 - 90 112 - 150	20	1198	4 XPC	2537	100"	1531	60"	1200	47"	1000
T-2500	2500	70 - 95 112 - 150	20	1260	4 XPC	2737	108"	1531	60"	1242	49"	1000
T-2800	2800	74 - 100 112 - 150	28	1367	4 XPC	3037	120"	1531	60"	1242	49"	1000
T-3000	3000	81 - 110 112 - 150	28	1424	4 XPC	3237	127"	1531	60"	1242	49"	1000
T-3200	3200	88 - 120 112 - 150	32	1495	4 XPC	3437	135"	1531	60"	1276	50"	1000
T-3600	3600	93 - 125 112 - 150	32	1594	4 XPC	3837	151"	1531	60"	1276	50"	1000
T-3800	3800	96 - 130 112 - 150	32	1687	4 XPC	4037	159"	1531	60"	1242	49"	1000
T-4000	4000	100 - 135 112 - 150	32	1744	4 XPC	4237	177"	1531	60"	1276	50"	1000









# SIDE SHIFT

## MODEL

MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-2000	2000	74 - 100 112 - 150	16	1360	4 XPC	2237	88"	1434	56"	1235	48"	1000
T-2300	2300	74 - 100 112 - 150	20	1490	4 XPC	2537	100"	1434	56"	1235	48"	1000
T-2500	2500	74 - 100 112 - 150	20	1528	4 XPC	2737	108"	1434	56"	1235	48"	1000
T-2800	2800	81 - 110 112 - 150	28	1640	4 XPC	3037	120"	1470	58"	1242	49"	1000
T-3000	3000	81 - 110 112 - 150	28	1600	4 XPC	3237	127"	1470	58"	1242	49"	1000
T-3200	3200	81 - 110 112 - 150	32	1700	4 XPC	3437	135"	1470	58"	1242	49"	1000
T-3600	3600	93 - 125 112 - 150	32	1594	4 XPC	3837	151"	1531	60"	1276	50"	1000
T-3800	3800	96 - 130 112 - 150	32	1687	4 XPC	4037	159"	1531	60"	1242	49"	1000

# REVERSIBLE SIDE SHIFT









MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-2300	2300	66 - 90 112 - 150	20	1628	4 XPC	2553	100"	1434	56"	1200	47"	1000
T-2500	2500	74 - 100 112 - 150	20	1690	4 XPC	2753	108"	1434	56"	1200	47"	1000
T-2800	2800	81 - 110 112 - 150	28	1797	4 XPC	3053	120"	1434	56"	1200	47"	1000
T-3200	3200	97 - 130 112 - 150	32	1925	4 XPC	3453	136"	1434	56"	1200	47"	1000

## WOLKAVIA



- ▶ Rotor POLSER of Ø 650 mm.
- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 120 - 280 HP.
- ▶ Thanks to his large diameter, it retains the remains more time in its interior and mulch them 3 times more than a conventional machine.
- ▶ 3 lines of counter hammers.



MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-2800	2800	89 - 120 149 - 200	28	1680	5 XPC	3071	121"	1570	62"	1300	51"	1000
T-3200	3200	89 - 120 149 - 200	32	1744	5 XPC	3471	137"	1570	62"	1300	51"	1000
T-3500	3500	93 - 125 150 - 240	32	1837	5 XPC	3771	148"	1570	62"	1300	51"	1000
T-3800	3800	97 - 130 179 - 280	32	1929	5 XPC	4071	160"	1570	62"	1300	51"	1000
T-4000	4000	149 - 200 179 - 280	40	2130	5 XPC	4271	168"	1570	62"	1300	51"	1000

# MAYDER










- ▶ Rotor POLSER of Ø 650 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Stamped hammers or Y blades.
- ▶ For tractors between 100 - 150 HP.
- ▶ Rear hydraulic hood.



Agricultural

## MODEL








MODEL						N° BELTS TYPE							
	mm	KW-HP			KG		A mm	A in	B mm	B in	C mm	C in	
T-2300	2300	74 - 100 112 - 150	24	80	1255	4 XPC	2545	100"	1750	69"	1200	47"	1000
T-2500	2500	74 - 100 112 - 150	24	80	1310	4 XPC	2745	108"	1750	69"	1200	47"	1000
T-2800	2800	88 - 120 112 - 150	24	80	1395	4 XPC	3045	120"	1750	69"	1200	47"	1000
T-3200	3200	96 - 130 112 - 150	32	96	1527	4 XPC	3445	136"	1750	69"	1200	47"	1000



## MAYDER +

- ▶ Rotor POLSER of Ø 725 mm.
- ▶ Steel-plate chassis, thickness 12 mm.
- ▶ For tractors between 120 - 270 HP.
- ▶ Double side belt transmission.

## MODEL

MODEL						N° BELTS TYPE							
	mm	KW-HP			KG		A mm	A in	B mm	B in	C mm	C in	
T-2800	2800	89 - 120 147 - 200	28	84	2316	2 x 4 XPC	3153	124"	2290	90"	1295	51"	1000
T-3200	3200	104 - 140 147 - 200	32	96	2510	2 x 4 XPC	3553	140"	2290	90"	1295	51"	1000
T-3800	3800	119 - 160 147 - 200	32	96	2845	2 x 4 XPC	4153	163"	2290	90"	1295	51"	1000
T-4600	4600	134 - 180 161 - 220	40	120	3150	2 x 4 XPC	4980	196"	2290	90"	1295	51"	1000
T-6500	6500	149 - 200 198 - 270	56	168	3430	2 x 4 XPC	6880	271"	2290	90"	1295	51"	1000

# ABATIBLE









# EVOLUTION

- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hydraulic folding exclusive design by SERRAT.
- ▶ For tractors between 100 - 140 HP.
- ▶ Different working until 5,40 m.
- ▶ The inside belt transmission allows us to approach the lateral edges as close as possible to the feet of the trees and towards the field edge.









Agricultural

MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-3600	3600	74 - 100 104 - 140	16 + 16	1742	2 x 3 XPC	3700	146"	2085	82"	1220	48"	1000
T-4000	4000	74 - 100 104 - 140	20 + 20	1845	2 x 3 XPC	4100	161"	2085	82"	1220	48"	1000



# PRO +

- ▶ Rotor POLSER of Ø 550 mm.
- ▶ For tractors between 125 - 220 HP.
- ▶ Different working widths can until 6,30 m.

MODEL					N° BELTS TYPE							
	mm	KW-HP		KG		A mm	A in	B mm	B in	C mm	C in	
T-3800	3800	92 - 125 164 - 220	16 + 16	2574	2 x 4 XPC	3936	155"	2235	88"	1595	63"	1000
T-4000	4000	99 - 135 164 - 220	20 + 20	2650	2 x 4 XPC	4174	164"	2235	88"	1595	63"	1000
T-4800	4800	112 - 150 164 - 220	24 + 24	2900	2 x 4 XPC	4936	194"	2235	88"	1595	63"	1000
T-5400	5400	125 - 170 164 - 220	24 + 24	3063	2 x 4 XPC	5536	218"	2235	88"	1595	63"	1000
T-6300	6300	147 - 200 164 - 220	28 + 28	3334	2 x 4 XPC	6436	253"	2235	88"	1595	63"	1000









# SUPER +



- ▶ Rotor POLSER of Ø 650 mm.
- ▶ For tractors between 250 - 400 HP.
- ▶ Different working widths 6,20 m and 7,30 m.

## MODEL

					Nº BELTS TYPE							
						mm	KW-HP	A mm	A in	B mm	B in	
T-6300	6300	186 - 250 298 - 400	64 + 64	5270	2 x 5 XPC	6450	254"	2860	113"	2030	80"	1000
T-7300	7300	186 - 250 298 - 400	64 + 64	5646	2 x 5 XPC	7450	293"	2860	113"	2030	80"	1000







# LEYKAZA



- ▶ Rotor POLSER of Ø 600 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 300 - 450 HP.
- ▶ Hydraulic folding exclusive design by SERRAT.
- ▶ Direct cardan rear machine.
- ▶ Composition of two machines working width of 10 meters with a front machine of 2,80 m.



## MODEL

					Nº BELTS TYPE							
						mm	KW-HP	A mm	A in	B mm	B in	
T-8400	8400	224 - 300 336 - 450	28 x 2	4560	4 XPC	8450	333"	1300	51"	1346	53"	1000
T-9500	9500	224 - 300 336 - 450	32 x 2	5080	4 XPC	9642	380"	1300	51"	1346	53"	1000
<b>F.R.D.</b> T-3000	3000	224 - 300 336 - 450	28	1600	4 XPC	3237	127"	1470	58"	1242	49"	1000

F.R.S.: Frontal Reversible Shide Shift.

## PICK-UP RANGE

### BRALAKC

# ■ BRALAKC ■

The BRALAKC feeder knives system is an exclusive design of SERRAT TRITURADORAS. These exclusive feeder knives are the result of years of experience that SERRAT has developed in self-feeder mulchers. Thanks to this innovative system we can obtain two essential factors collecting the pruning remains from the ground.

- ▶ Firstable, an absolute efficiency on the collection of the material thanks to the helical mounting system.
- ▶ On the other hand, thanks to its curved design, we can obtain a continuous feeding and without any obstruction, a fundamental factor in these type of machines when working in pruning cordons of high dimensions and volume.



## RHENDUEL



The RHENDUEL system is an ingenious perfect cutting system for self-feeder mulchers. Its main advantage is that with this system we can obtain a very fine chipwoods like sawdust thanks to its special blades. In addition, the power required by the tractor, to mulch with this system of blades, it can decrease up to 40 %, a very important factor to be taken into account to save fuel and save money.

Thanks to the fineness and the homogeneity of the chipwoods, it was possible to obtain that in machines with pneumatic charge like BIOMASS it were possible the transport through flexible and to load the material into biomass trailers.

It must be remembered that the fineness of the material, facilitates a multitude of activities in the field, for example:

- 1.- The incorporation of the woodchips into the ground is much faster with this system and in a short period of time the material will disappear from the ground.
- 2.- In nuts cultivation, where normally the harvest is mechanic, is fundamental to use these machines, because otherwise, we could have some problems during the harvest with big piece of wood causing large losses for the farmers.



## SPLINTER

**ROTOR WITH SPLINTER BLADES:** Its main characteristic is that this rotor with blades is made up of two spirals in which the effort is distributed throughout the entire rotor, giving it a very high rigidity. In addition, these blades are reversible, having two cutting edges. useful cut. It is a rotor intended for wood shredding works of pruning remains and clearing.



# SPLINTER

- ▶ Tubular rotor of  $\varnothing$  400 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Forged agricultural hammers SERRAT.
- ▶ For tractors between 60 - 100 HP.
- ▶ For material up to  $\varnothing$  50 mm.
- ▶ High torque hydraulic motor reversible.
- ▶ Reversible toothed rear screen.
- ▶ Feeder with system BRALAKC.



MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-900	900	44 - 60 74 - 100	8	555	3 XPC	1100	43"	1195	47"	1031	41"	540
T-1250	1250	48 - 65 74 - 100	12	628	3 XPC	1445	57"	1195	47"	1098	43"	540
T-1400	1400	51 - 70 74 - 100	12	669	3 XPC	1595	63"	1195	47"	1098	43"	540
T-1500	1500	55 - 75 74 - 100	12	686	3 XPC	1700	67"	1195	47"	1098	43"	540
T-1800	1800	59 - 80 74 - 100	16	773	3 XPC	2000	79"	1195	47"	1098	43"	540
T-2000	2000	63 - 85 74 - 100	16	810	3 XPC	2200	87"	1195	47"	1098	43"	540



- ▶ Tubular rotor of  $\varnothing$  450 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ For tractors between 60 - 120 HP.
- ▶ For material up to  $\varnothing$  80 mm.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	45 - 60 88 - 120	12	1059	3 XPC	1815	71"	1245	49"	1215	48"	540
T-1800	1800	60 - 80 88 - 120	16	1147	3 XPC	2015	79"	1245	49"	1215	48"	540
T-2000	2000	75 - 100 88 - 120	16	1222	3 XPC	2215	87"	1245	49"	1215	48"	540



# SPLINTER









## 350

- ▶ Rotor SPLINTER of Ø 350 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Treated blades.
- ▶ For tractors between 60 - 120 HP.
- ▶ For material up to Ø 60 mm.
- ▶ Feeder with system BRALAKC.



Agricultural







MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1300	1300	45 - 60 88 - 120	37	850	3 XPC	1740	69"	1415	56"	1080	43"	540
T-1500	1500	52 - 70 88 - 120	43	960	3 XPC	1940	76"	1415	56"	1080	43"	540
T-1700	1700	60 - 80 88 - 120	48	1040	3 XPC	2140	84"	1415	56"	1080	43"	540




## 450



- ▶ Rotor SPLINTER of Ø 450 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Treated blades.
- ▶ For tractors between 70 - 140 HP.
- ▶ For material up to Ø 80 mm.
- ▶ Feeder with system BRALAKC.

MODEL	 mm	 KW-HP			N° BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	52 - 70 110 - 140	38	1108	3 XPC	1755	69"	1235	49"	1215	48"	540
T-1800	1800	60 - 80 110 - 140	42	1200	3 XPC	1955	77"	1235	49"	1215	48"	1000
T-2000	2000	67 - 90 110 - 140	48	1286	3 XPC	2155	85"	1235	49"	1215	48"	1000

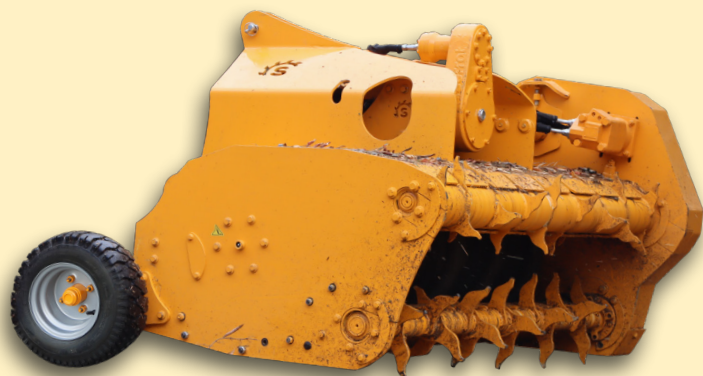

**550**

- ▶ Rotor SPLINTER of Ø 550 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ For tractors between 90 to 160 HP.
- ▶ For material up to Ø 100 mm.

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1800	1800	67 - 90 119 - 160	42	1570	4 XPC	2240	88"	1560	61"	1290	51"	1000
T-2000	2000	74 - 100 119 - 160	48	1800	4 XPC	2440	96"	1560	61"	1290	51"	1000
T-2300	2300	82 - 110 119 - 160	54	2000	4 XPC	2740	108"	1560	61"	1290	51"	1000

# KASTOR



**350**

- ▶ Mulcher with reversible hydraulic feeder, ideal for pruning of vineyard, table grapes, chestnut-trees, olive trees, almond-trees, citrus fruits, walnuts, hazel, nuts, etc.
- ▶ Rotor with system RHENDUEL of Ø 350 mm.
- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Treated blades.
- ▶ For tractors between 60 - 90 HP.
- ▶ High torque hydraulic motor reversible.
- ▶ Feeder with system BRALAKC.
- ▶ Double lines of counter hammers RHENDUEL.
- ▶ For material up to Ø 80 mm.



MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1500	1500	44 - 60 66 - 90	4 x 7	1020	3 XPC	1688	66"	1093	43"	1079	42"	540
T-1700	1700	59 - 80 66 - 90	4 x 8	1105	3 XPC	1888	74"	1093	43"	1079	42"	540



**450**

- ▶ Rotor with system RHENDUEL of Ø 450 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ For tractors between 60 - 120 HP.
- ▶ For material up to Ø 100 mm.

Agricultural

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	44 - 60 88 - 120	4 x 8	1356	3 XPC	1835	72"	1197	47"	1185	47"	540
T-1800	1800	60 - 80 88 - 120	4 x 9	1475	3 XPC	2037	80"	1197	47"	1185	47"	540
T-2000	2000	75 - 100 88 - 120	4 x 10	1590	3 XPC	2235	88"	1197	47"	1185	47"	1000



**550**

- ▶ Rotor with system RHENDUEL of Ø 550 mm.
- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ For tractors between 100 - 160 HP.
- ▶ For material up to Ø 14 cm.







MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	74 - 100 119 - 160	6 x 8	1720	4 XPC	1865	73"	1845	73"	1000	39"	1000
T-1800	1800	81 - 110 119 - 160	6 x 9	1858	4 XPC	2065	81"	1845	73"	1000	39"	1000
T-2000	2000	88 - 120 119 - 160	6 x 10	1993	4 XPC	2265	90"	1845	73"	1000	39"	1000
T-2300	2300	96 - 130 119 - 160	6 x 11	2193	4 XPC	2565	101"	1845	73"	1000	39"	1000



**625**









- ▶ Rotor with system RHENDUEL of Ø 625 mm.
- ▶ Steel-plate chassis, thickness 15 mm.
- ▶ For tractors between 220 - 350 HP.
- ▶ 3 lines of counter hammers RHENDUEL.
- ▶ For material up to Ø 250 mm.

MODEL	 		 	N° BELTS TYPE								
	mm	KW-HP			A mm	A in	B mm	B in	C mm	C in		
T-2250	2250	164 - 220 261 - 350	6 x 9	4220	2 x 5 XPC	2735	108"	1890	74"	1600	63"	1000

# INTERPIQUET









- ▶ Mechanical driven swing arm mower can be used to mow around trees, posts, crash barrier, etc. Without any damage.
- ▶ For tractors between 40 - 100 HP.
- ▶ Cutting width of 850 mm (32 inches) and 1.200 mm (47 inches).
- ▶ Backwardation from the axis of the tractor of 2.000 mm (79 inches) and 3.100 mm (122 inches).
- ▶ Length for the transport of 2.300 mm (90 inches) and 3.000 mm (118 inches).
- ▶ 3 retractable knives.

MODEL	 		 								
	mm	KW-HP		A mm	A in	B mm	B in	C mm	C in		
INTERPIQUET	3100	30 - 40 74 - 100	3	450	3000	118"	3100	122"	1200	47"	540



## HIGH CUT







- ▶ Mechanically operated vertical axis disc for cutting fruit tree trunks. Up to 150 - 200 mm in diameter.
- ▶ For tractors between 70 to 105 HP.
- ▶ 24 tooth HighCut disc.


MODEL											
	mm	KW-HP			A mm	A in	B mm	B in	C mm	C in	
INTERPIQUET	3100	51 - 70 78 - 105	24	540	3000	118"	3100	122"	1200	47"	540


## DOBLE

- ▶ Double mechanical driven swing arms mower.
- ▶ For tractors between 70 to 105 HP.
- ▶ Cutting width of 6.200 mm - 6.500 mm.
- ▶ Cutting diameter of 1.200 mm.
- ▶ Length for the transport of 3.400 mm.



MODEL											
	mm	KW-HP			A mm	A in	B mm	B in	C mm	C in	
T-6200	6200	51 - 70 78 - 105	3x2	1028	2536	100"	6200	244"	1200	47"	540
T-6500	6500	51 - 70 90 - 105	3x2	1032	2686	106"	6500	256"	1500	59"	540

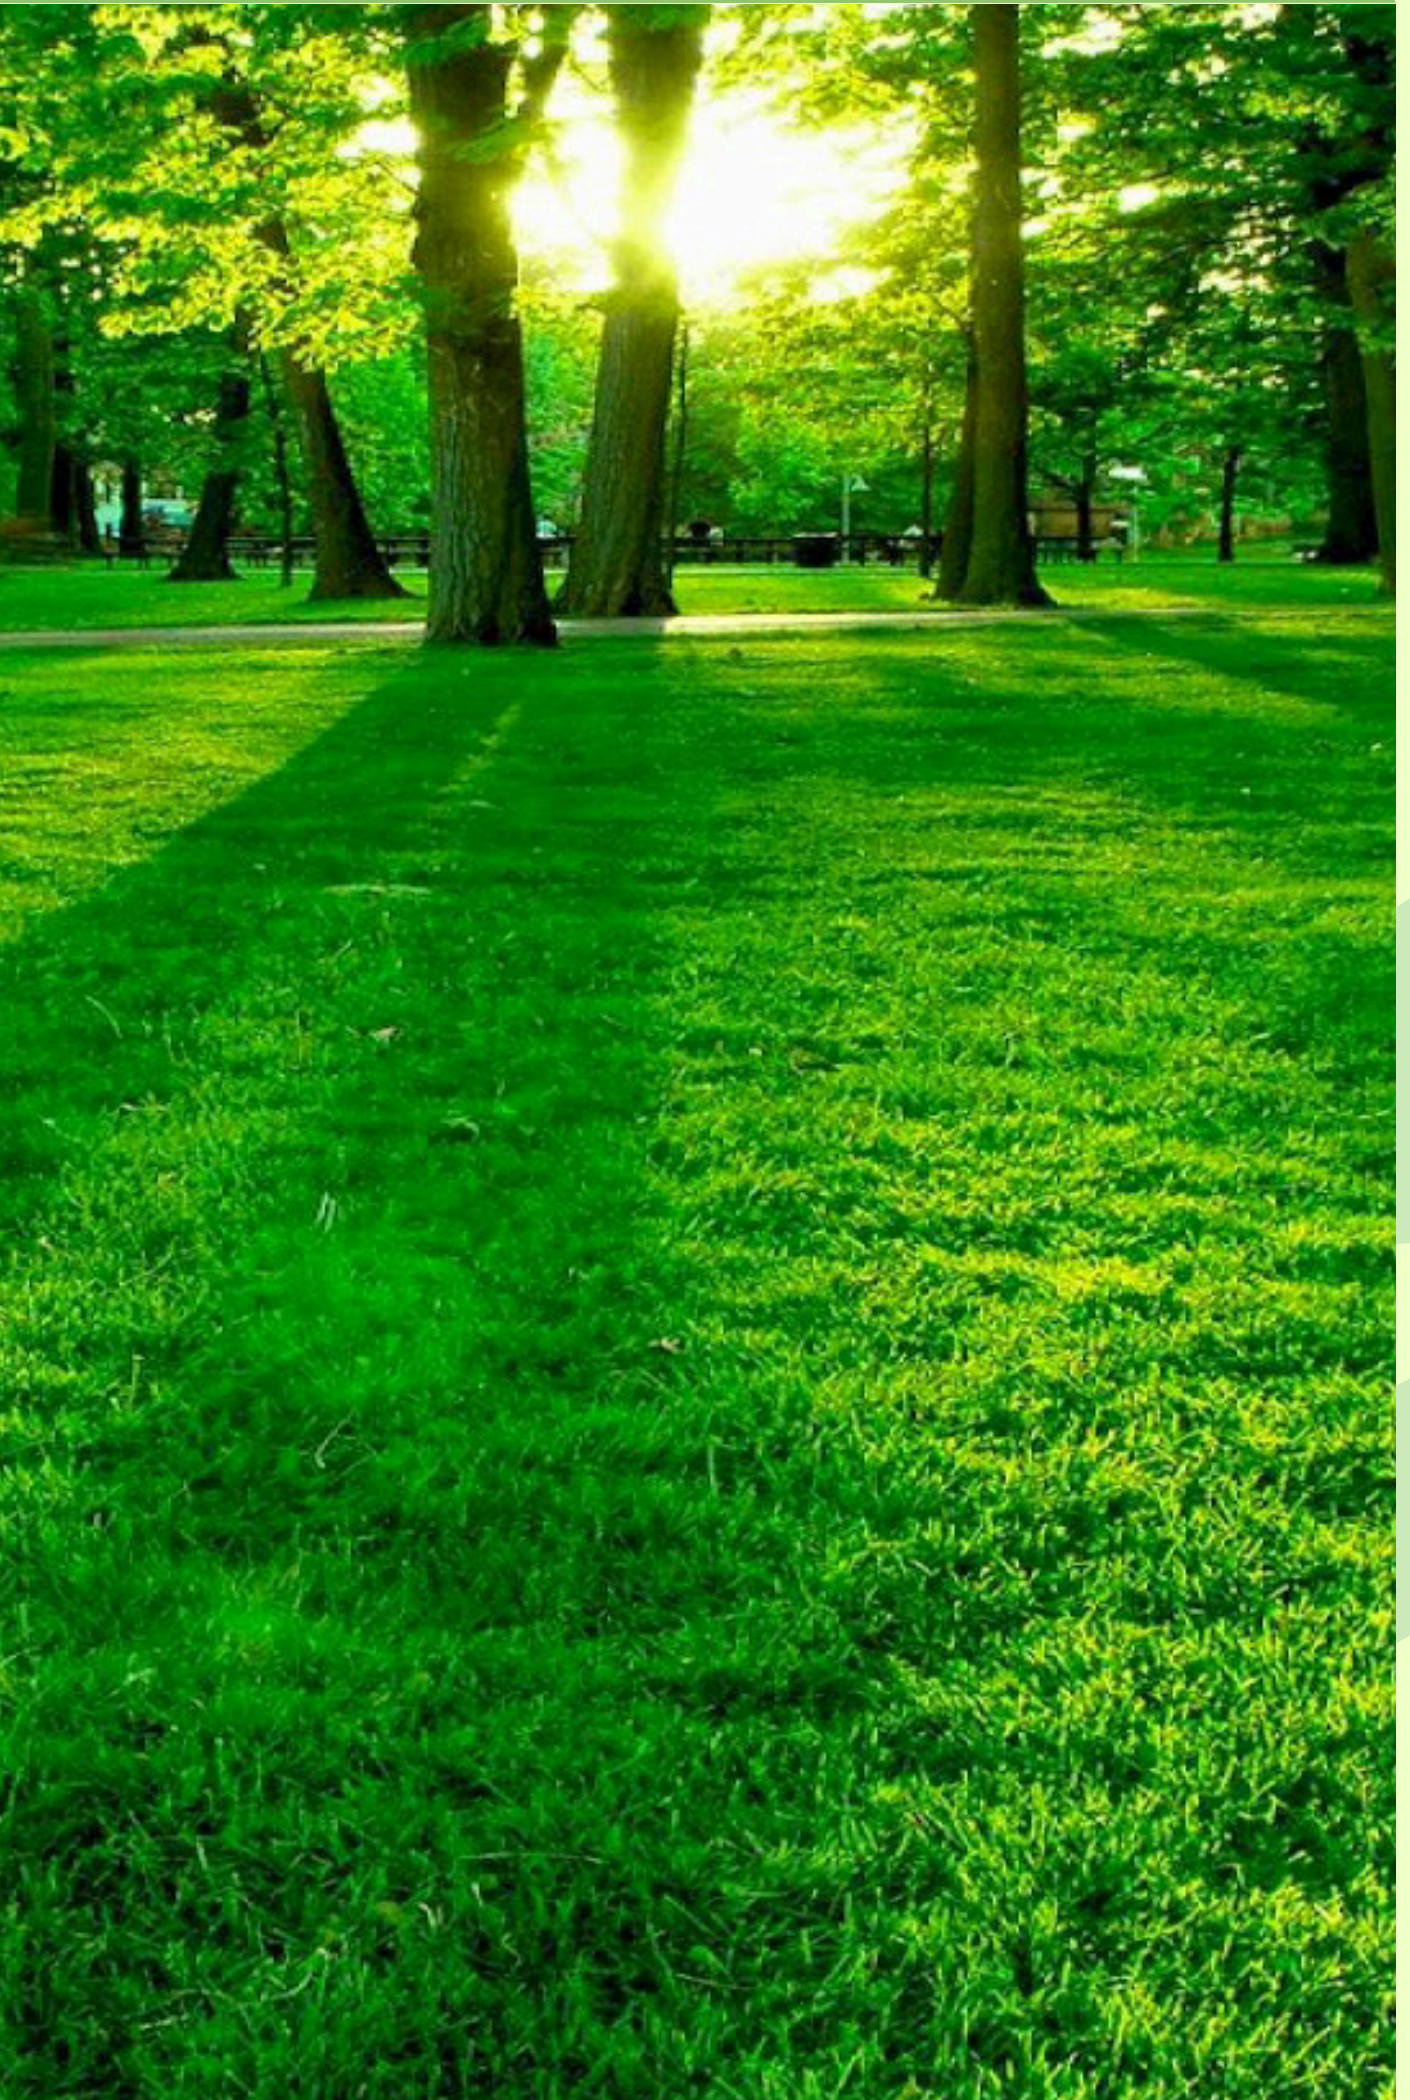

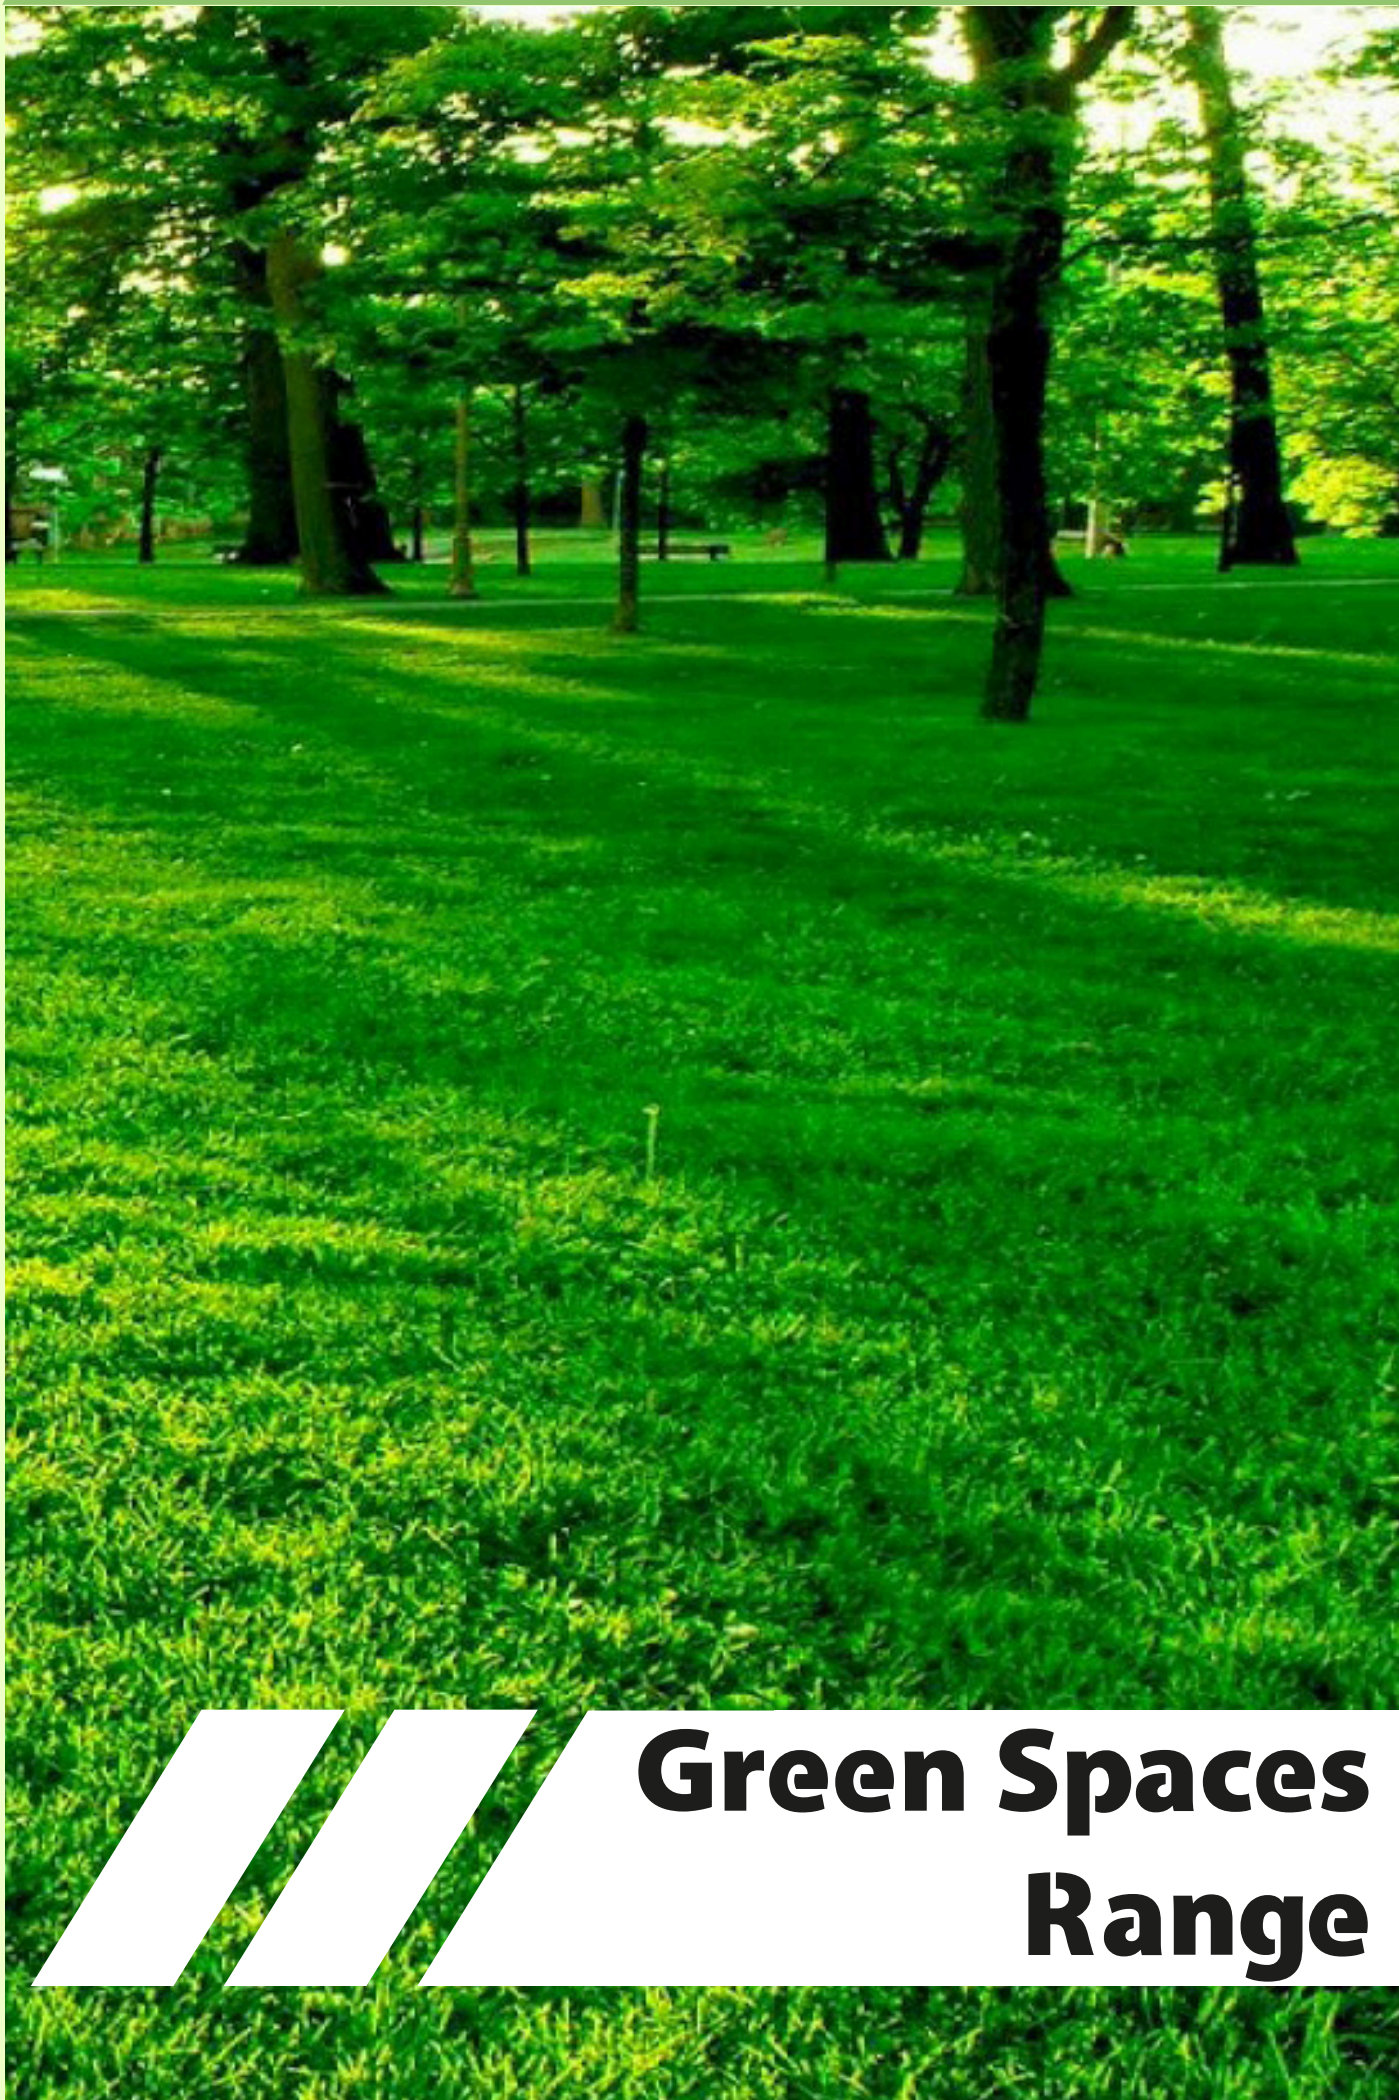


# **Green Spaces Range**

# DAP





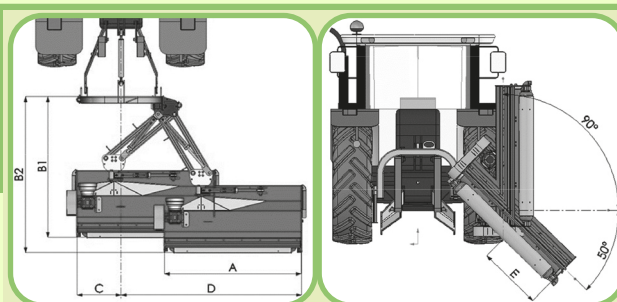


# MINI DAP

- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Angulation +90° / - 50°.
- ▶ Stamped hammers SERRAT.
- ▶ For tractors between 35 to 80 HP.
- ▶ GIROSTOP System.
- ▶ Gearbox with freewheel included.




## MODEL

					N° BELTS TYPE	A	B1	B2	C	D	E	
	mm	KW-HP		KG		mm-in	mm-in	mm-in	mm-in	mm-in	mm-in	
T-1400	1400	26 - 35 59 - 80	12	445	3 XPB	1599 - 63"	1645 - 65"	1820 - 72"	510 - 20"	1650 - 65"	535 - 21"	540
T-1600	1600	34 - 45 59 - 80	16	470	3 XPB	1799 - 71"	1645 - 65"	1820 - 72"	510 - 20"	1850 - 73"	735 - 29"	540
T-1800	1800	37 - 50 59 - 80	16	500	3 XPB	1999 - 79"	1645 - 65"	1820 - 72"	510 - 20"	2050 - 81"	935 - 37"	540





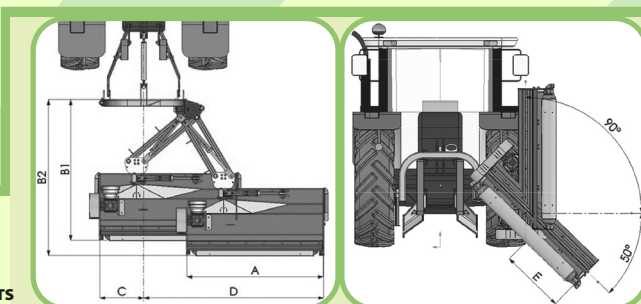


# DAP EVOLUTION

- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Angulation +90° / - 50°.
- ▶ For tractors between 70 to 120 HP.
- ▶ Double bearing on rear roller.



## MODEL

					N° BELTS TYPE	A	B1	B2	C	D		
	mm	KW-HP		KG		mm-in	mm-in	mm-in	mm-in	mm-in		
T-1600	1600	51 - 70 88 - 120	12	24	885	3 XPC	1884 - 74"	1975 - 78"	2290 - 90"	345 - 14"	1750 - 69"	750
T-1800	1800	59 - 80 88 - 120	16	28	920	3 XPC	2058 - 81"	1975 - 78"	2290 - 90"	345 - 14"	2950 - 116"	750
T-2000	2000	59 - 80 88 - 120	16	32	955	3 XPC	2258 - 89"	1975 - 78"	2290 - 90"	345 - 14"	3150 - 124"	750
T- 2300	2300	66 - 90 88 - 120	20	40	1015	3 XPC	2558 - 101"	1975 - 78"	2290 - 90"	345 - 14"	3450 - 136"	750






# DAP +



- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Angulation +90° / -50°.
- ▶ For tractors between 120 to 180 HP.
- ▶ Double bearing on rear roller.
- ▶ Double transmission with a centre shaft and homocinetic knot on the second transmission.

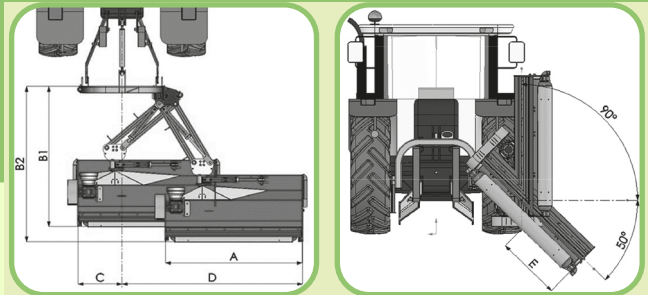

Green Spaces

MODEL					N° BELTS TYPE	A	B1	B2	C	D	E	
	mm	KW-HP				mm-in	mm-in	mm-in	mm-in	mm-in	mm-in	
T-1800	1800	89 - 120 127 - 170	16	1655	4 XPC	1800 - 71"	2494 - 98"	3091 - 122"	436 - 17"	2927 - 115"	1220 - 48"	750
T-2000	2000	97 - 130 127 - 170	16	1710	4 XPC	2000 - 79"	2494 - 98"	3091 - 122"	436 - 17"	3127 - 123"	1420 - 56"	750
T-2300	2300	104 - 140 134 - 180	20	1790	4 XPC	2300 - 91"	2494 - 98"	3091 - 122"	436 - 17"	3427 - 135"	1720 - 68"	750
T-2500	2500	112 - 150 134 - 180	20	1835	4 XPC	2500 - 98"	2494 - 98"	3091 - 122"	436 - 17"	3627 - 143"	1920 - 76"	750

- ▶ Non-wear steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER+ of Ø 550 mm.
- ▶ Angulation +90° / -50°.
- ▶ For tractors between 140 to 200 HP.
- ▶ Forestry SERRAT hammer swinging 360°.
- ▶ Double bearing on rear roller.
- ▶ Double transmission with a centre shaft and homocinetic knot on the second transmission.

# DAP FX



MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	104 - 140 149 - 200	12	1600	4 XPC	1862	73"	2816	111"	1485	58"	750
T-1800	1800	104 - 140 149 - 200	16	1800	4 XPC	2062	81"	2816	111"	1485	58"	750
T-2000	2000	104 - 140 149 - 200	16	2050	4 XPC	2262	89"	2816	111"	1485	58"	750
T-2300	2300	104 - 140 149 - 200	20	2300	4 XPC	2562	101"	2816	111"	1485	58"	750
T-2500	2500	104 - 140 149 - 200	24	2400	4 XPC	2762	109"	2816	111"	1485	58"	750

### Follow us:

#### INSTAGRAM



#### YOUTUBE



#### FACEBOOK



#### WEB



All figures and illustrations contained in this manual are generic representations to be taken merely as graphic general information supplementing texts, without expecting from them any rigour in terms of measures, shapes or parts layout.

## Notes

---

---

---

---

---

---

---

---

---

---

---

---





**www.serrat.com**  
**comercial@serrat.es**  
**Tel. (+34) 974 417 830**  
**Ctra. Nacional 240 km 149,3**  
**22310 Castejón del Puente, Spain**