


# FK MRT® STOCK FENCING



## CHARACTERISTICS

- Made with high tensile horizontal wires.
- Class A - Heavy galvanized wires according to EN 10244-2 standards.
- Progressive geometry as standard, non-progressive is an option.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.

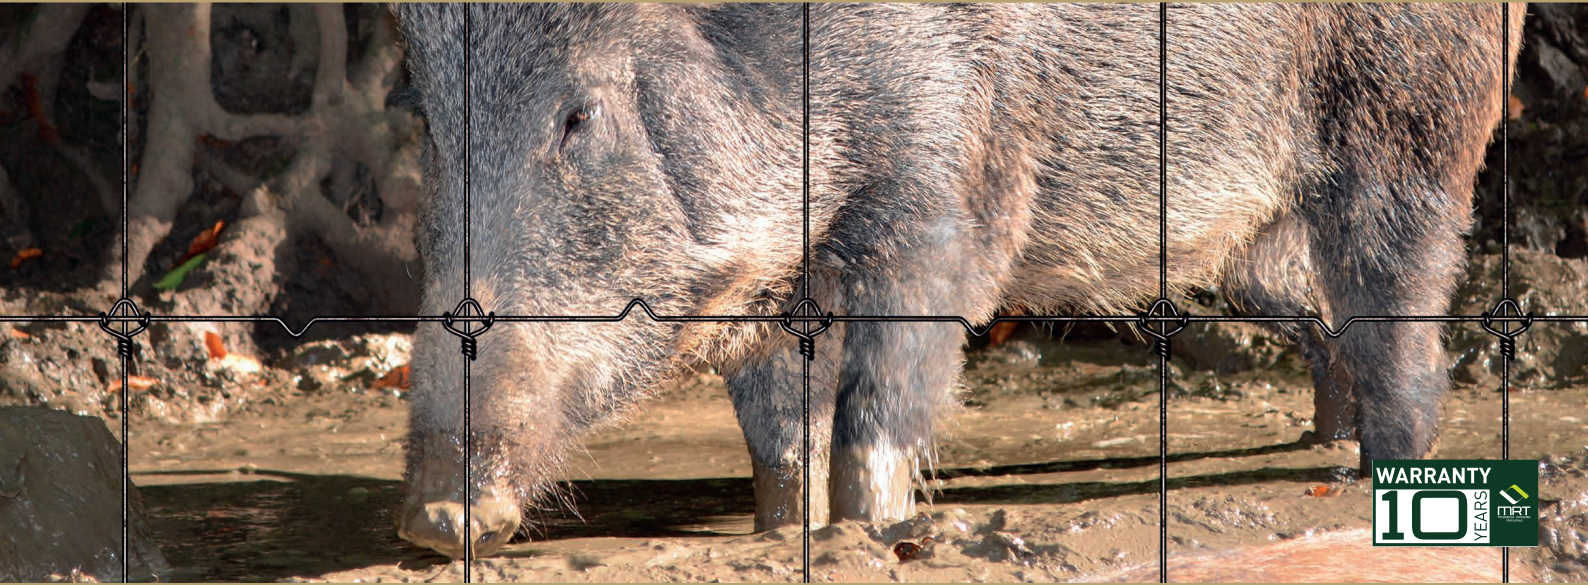

HEIGHT (mm)	HORIZONTAL WIRES		VERTICAL WIRES		KNOT WIRE	
	DIAMETER (mm)	RESISTANCE (Kg/mm <sup>2</sup> )	DIAMETER (mm)	RESISTANCE (Kg/mm <sup>2</sup> )	DIAMETER (mm)	RESISTANCE (Kg/mm <sup>2</sup> )
From 1,000 to 3,000	2.50	123 - 142	2.50	70 - 97	2.24	45-55

## OPTIONAL COATINGS


- Heavy galvanized + 2 lines Ecover®
- Heavy galvanized + Ecover®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



ZnAl

STANDARD DIMENSIONS

Antisliding fixed knot

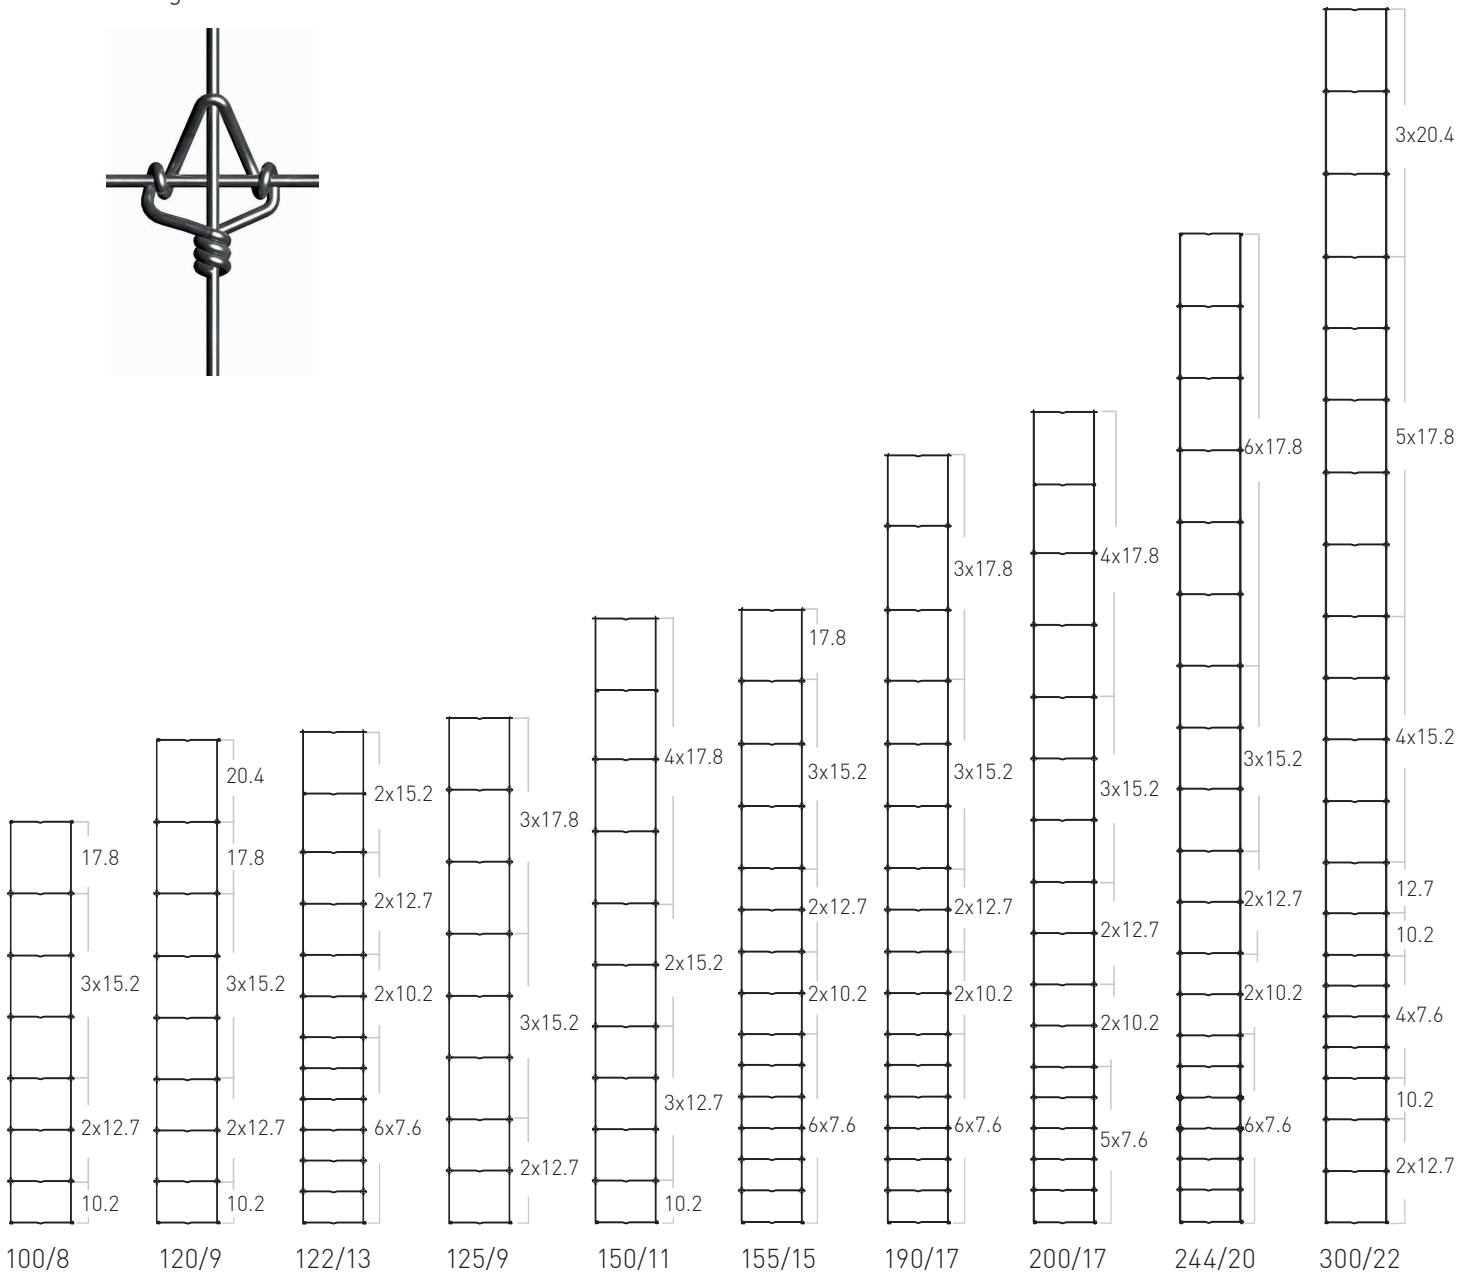

Type	Height (cm)	Nº of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
100/8	100	8	15 - 30	100
120/9	120	9		
122/13	122	13		
125/9	125	9		
150/11	150	11		
155/15	155	15		
190/17	190	17		
200/17	200	17		
244/20	244	20		
300/22	300	22		

Other dimensions available upon request.