


HJ MRT® STOCK FENCING



STANDARD DIMENSIONS

- Stock fencing characterized by its progressive mesh.
- Made with Class A - Heavy galvanized wires according to EN 10244-2 standard.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.
- The roll length can be 50 or 100 meters, and the separation between vertical wires is 15 or 30 cm, depending on the model.
- Made according to EN10223-5 standard.

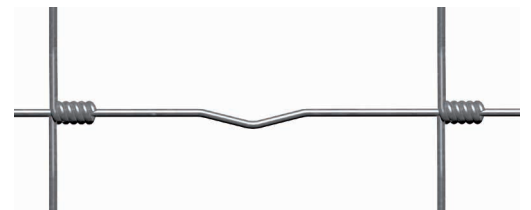

3 types are proposed:

MESH	HORIZONTAL EXTREME WIRES		HORIZONTAL INTERMEDIATE WIRES		VERTICAL WIRES	
	DIAMETER (mm)	RESISTANCE (Kg/mm ²)	DIAMETER (mm)	RESISTANCE (Kg/mm ²)	DIAMETER (mm)	RESISTANCE (Kg/mm ²)
HJ MRT® Light stock fencing -L-	2.50	> 71	1.90	> 71	1.90	45 - 55
HJ MRT® Medium stock fencing -C-	3.00	> 71	2.50	> 71	2.50	45 - 55
HJ MRT® Heavy stock fencing -B-	4.00	> 71	3.00	> 71	3.00	45 - 55


OPTIONAL COATINGS

- Heavy galvanized + 2 lines Ecover®
- Heavy galvanized + Ecover®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



HJ MRT® LIGHT STOCK FENCING -L-

STANDARD DIMENSIONS

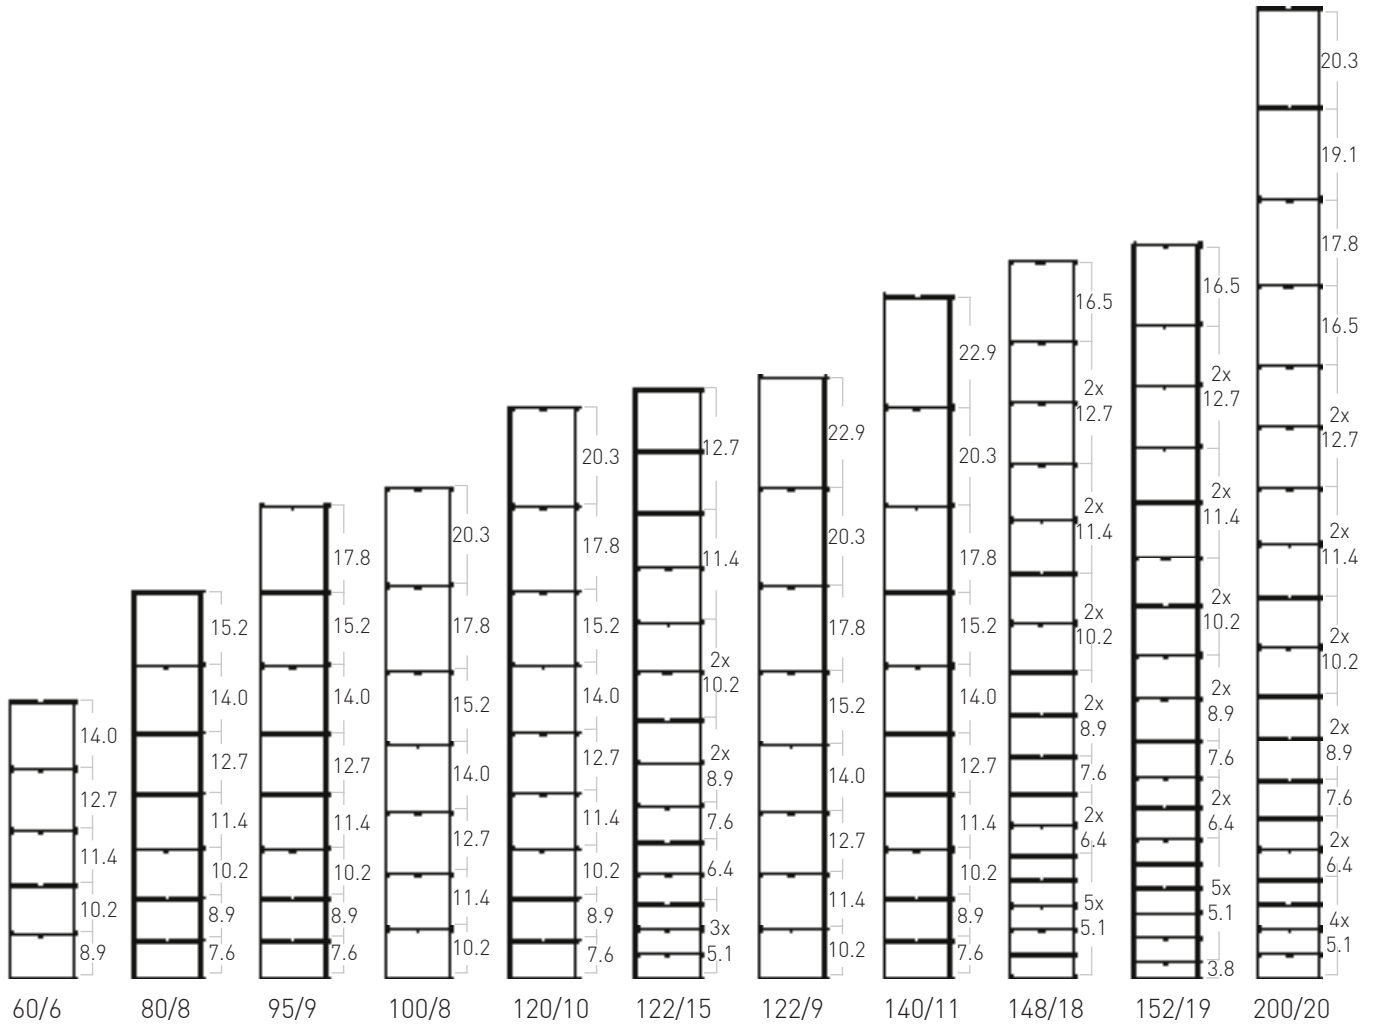


TYPE	HEIGHT (CM)	Nº OF HORIZONTAL WIRES	DISTANCE BETWEEN VERTICAL WIRES (cm)	ROLL LENGTH (m)
60/6	60	6	15-30	50-100
80/8	80	8		
95/9	95	9		
100/8	100	8		
120/10	120	10		
122/15	122	15		
122/9	122	9		
140/11	140	11		
148/18	148	18		
152/19	152	19		
200/20	200	20		

Other dimensions available upon request.

HJ MRT® MEDIUM STOCK FENCING -C-

STANDARD DIMENSIONS

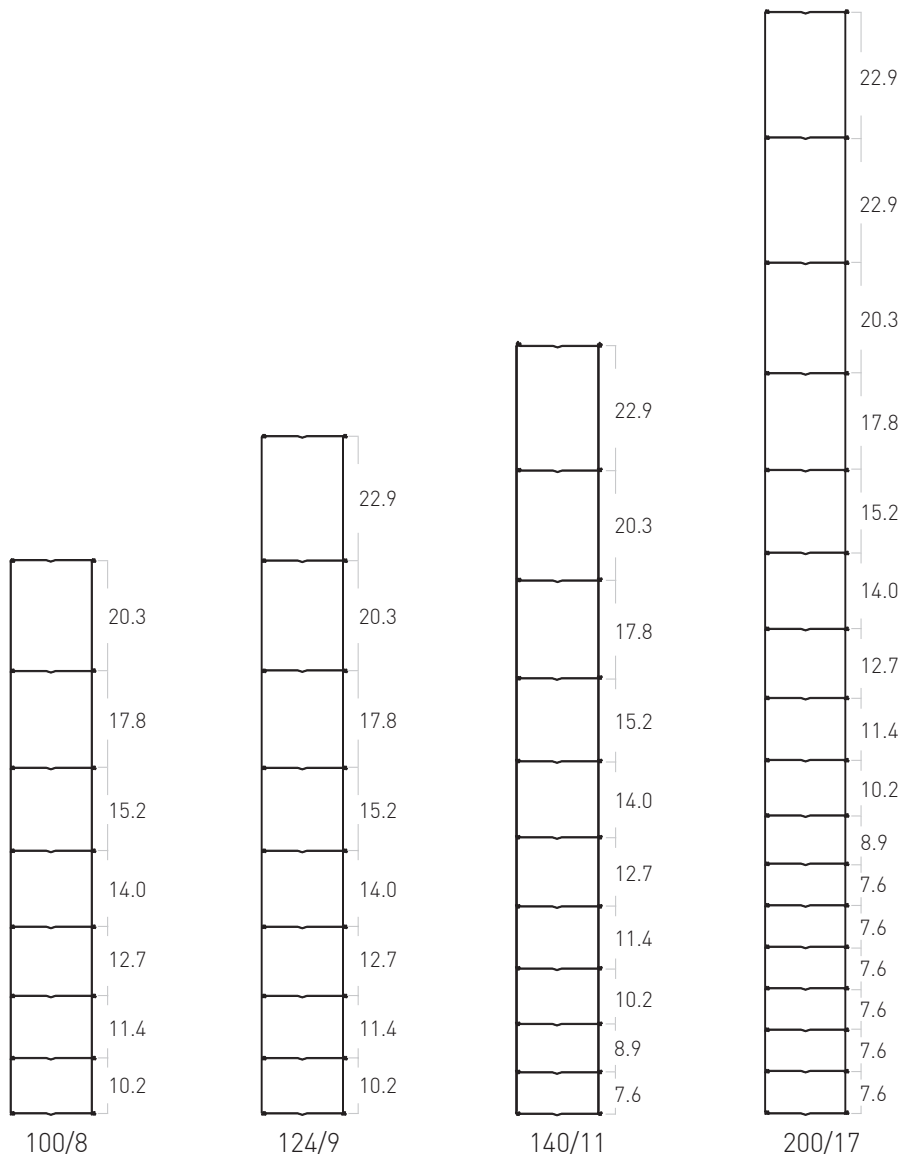


TYPE	HEIGHT (CM)	Nº OF HORIZONTAL WIRES	DISTANCE BETWEEN VERTICAL WIRES (cm)	ROLL LENGTH (m)
100/8	100	8	15 - 30	50 - 100
124/9	124	9		
140/11	140	11		
200/17	200	17		

Other dimensions available upon request.

HJ MRT® HEAVY STOCK FENCING -B-

STANDARD DIMENSIONS

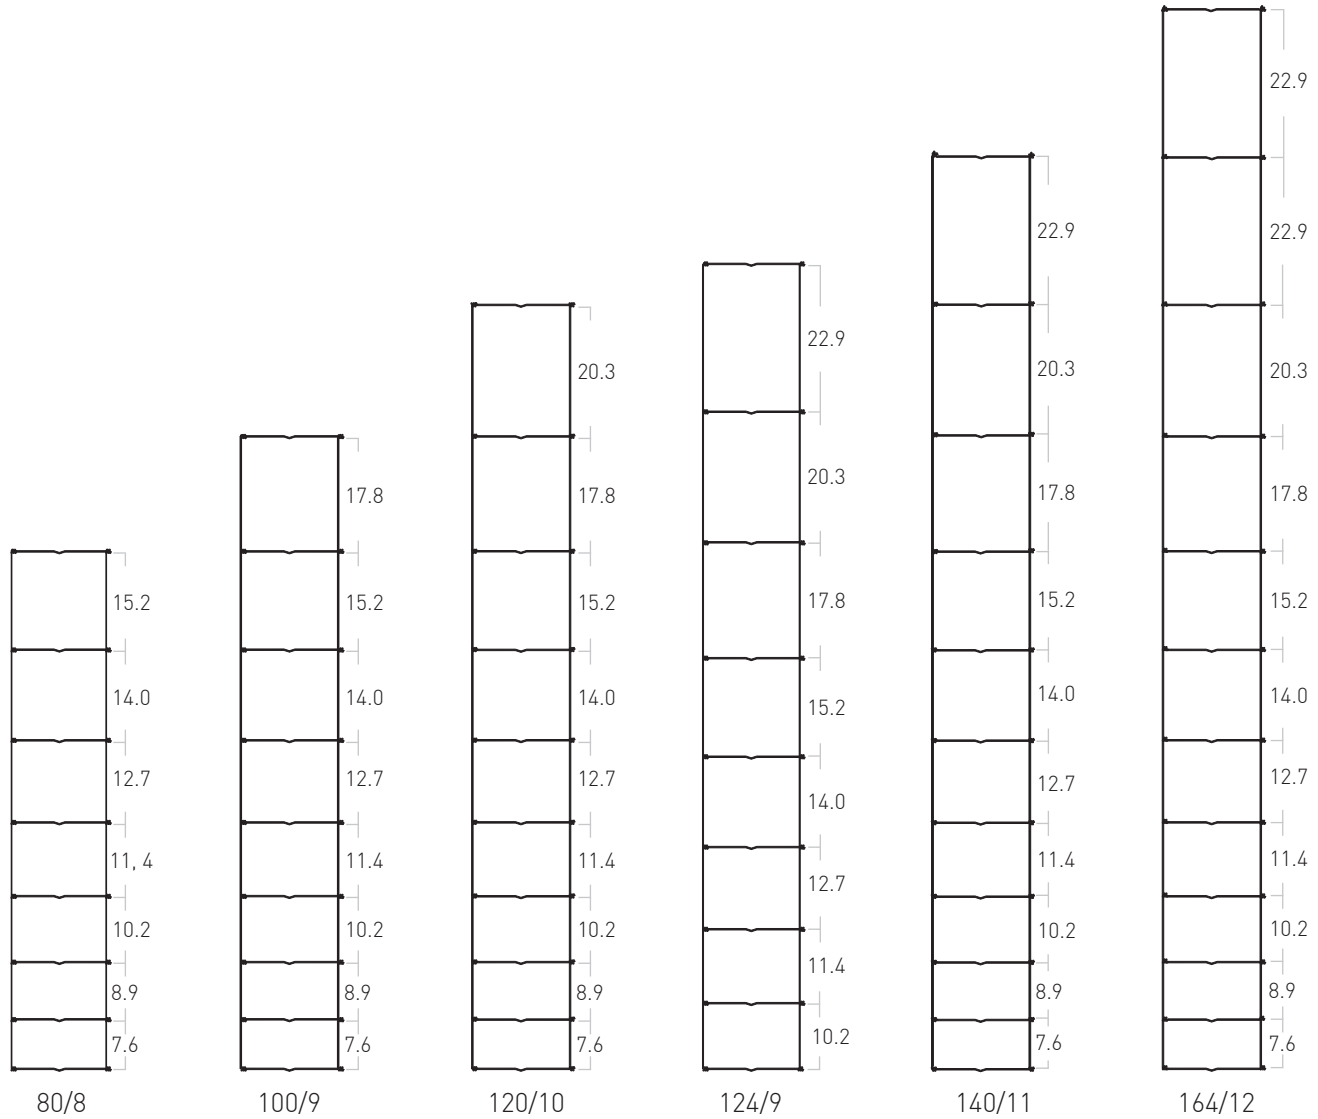

TYPE	HEIGHT (CM)	N° OF HORIZONTAL WIRES	DISTANCE BETWEEN VERTICAL WIRES (cm)	ROLL LENGTH (m)
80/8	80	8	15	50
100/9	100	9		
120/10	120	10		
124/9	124	9		
140/11	140	11		
164/12	164	12		

Other dimensions available upon request.