



## IoT – M2M PRODUCTS & SOLUTIONS

---



# - we lead you to success -



ATIM is the **expert** and **pioneer** designer of **IoT sensors** & M2M modems for smart building, cities, industries, agriculture, utilities and energy efficiency.

Our experienced R&D teams focuses its work on making solutions dedicated to the client.

Constantly feeding back from them for more than **25 years**.

Our **mission** is to provide our clients with a robust remote solution: ease of installation/configuration, great autonomy and technical features to maximize your ROI.

Our **role** is to support you in finding an effective solution by offering you a global offer:

from sensors to data visualization thanks to the Atim Cloud Wireless® web platform.

## advice

on the technologies  
and networks

## support

your  
project



## define

your need



## determine

the right solutions







# Sensors

ATIM Cloud Wireless®

25 + years of design and manufacturing

R&D experts

Industrial quality



# Configuration

Downlink

Mobile App

USB



M2M

# Connectivity

Technology

Public network

Private network



# Data acquisition

IoT web platform

Codecs

Windows program

# IoT SENSORS

ATIM CLOUD WIRELESS®



M2M<sup>Ⓜ</sup>



**SMART CITY  
BUILDING**



**UTILITIES**



**INDUSTRY**



**AGRICULTURE**



**EVENTS  
TRANSPORT**




# AIR QUALITY

## NDIR\* SENSOR

IoT sensor



CFG-APP

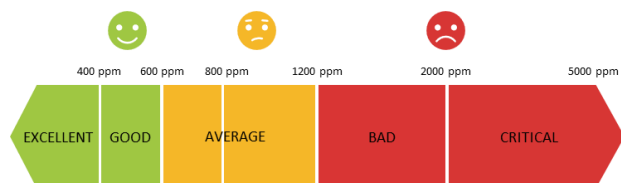

## Features

The THAQ facilitates the monitoring of your rooms and buildings thanks to its CO<sub>2</sub>, VOC (volatile organic compounds), temperature and relative humidity sensors.

Equipped with a LED on the front panel (Green > Orange > Red) clearly indicating the need to ventilate the room, the air quality is displayed locally or the complete measurements are sent to an operated [Sigfox](#) or [LoRaWAN](#) network.

The configuration is done from the tools of the ATIM suite, either locally or remotely: CO<sub>2</sub> thresholds are among other things configurable.

Compatible with the computer and mobile versions of the [IoT web platform](#)\*\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.



Carbon dioxide (CO<sub>2</sub>)

Range: 0 to 40000ppm

Precision : +/- 40ppm +5% from 400 to 5000ppm



Volatile Organic Compounds

Range: 0 to 500 VOC

Resolution : 1



Air temperature

Range: -40°C to +125°C

Precision : +/- 0.2°C between -40°C and +80°C



Air humidity : 0% RH to 100% RH

Precision : +/- 2% RH between 0 and 100 % RH



Multifunction visual signal:

- network quality
- air quality
- mode of operation



Interchangeable batteries



Setup via USB, downlink or mobile app



Plug & Play

## References

Part number	Technology	
ACW/THAQ	Sigfox	LoRaWAN

\* Recognized by the High Council of [Public health](#)

\*\* Disponible avec un abonnement à la plateforme web Atim Cloud Wireless™

# OPTIMISE AND MONITORE AIR QUALITY



Smart Building



Smart City




Smart Industry

- Children spend most of their time in class, the quality of the air they inhale is a major issue for their health, especially since some VOCs are classified as carcinogenic and high CO2 levels facilitate the spread of the Covid virus.
- Thanks to the LED indicating the air quality according to a precise colour code, teachers will be able to take immediate ventilation measures (LED deactivatable by configuration).
- It has been proven that optimal air quality has an effect on the concentration and well-being of children (less coughing, allergies, etc.).



- The labour code states that for any closed work area, the air must be renewed in order to maintain a pure atmosphere and to avoid exaggerated temperature rises.
- A real time indicator of CO2, VOC, temperature and humidity levels makes it possible to ensure that the air treatment equipment is working properly and to intervene in case of malfunction.

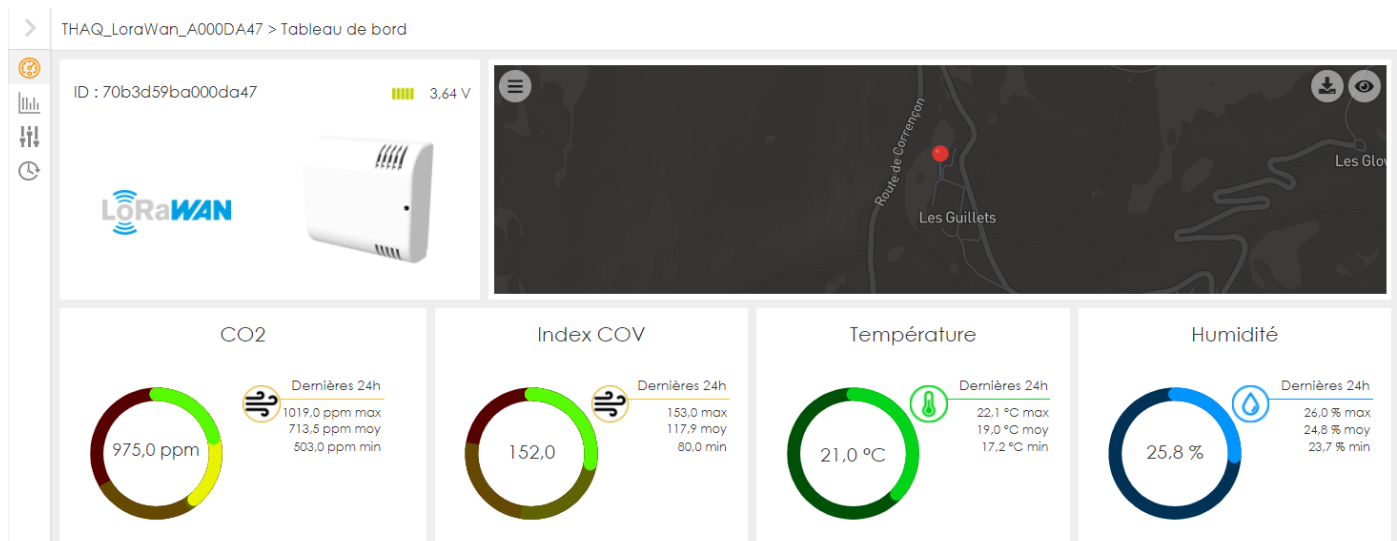





# TEMPERATURE - HUMIDITY

IoT sensor



## Features

The TH facilitates the monitoring of comfort and energy efficiency indicators in your rooms and buildings thanks to its temperature and humidity sensors.

Measurements are regularly transmitted to a local gateway or via the [Sigfox](#) or [LoRaWAN](#) networks. The configuration is done from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the [IoT web platform](#)\*\*, the visualization of data, the remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.



Range : -50°C to +125°C  
Precision : +/- 0.3°C between -10°C to 85°C



Range : 0% RH to 100% RH  
Precision : +/- 3% RH between 0 to 80 % RH



IP30 protection rating -I versions  
IP66 protection rating -O versions



1 temperature and humidity measurement/hour  
Sigfox 5+ years\*  
LoRaWAN 12+ years\*



Interchangeable batteries



Setup via USB, downlink



Plug & Play



GPS option in LoRaWAN  
(only temperature monitoring)

## References

Part number	Technology	
ACW/TH-I	Sigfox	LoRaWAN
ACW/TH-O	Sigfox	LoRaWAN
ACW/TH-G	LoRaWAN + GPS	
ACW/TO-G	LoRaWAN + GPS	

\* Subjected to the environment conditions

\*\*Available with a subscription to Atim Cloud Wireless™ web platform

# OPTIMIZE AND CONTROL ENERGY PERFORMANCE



Smart Building



Smart City



Smart Industry

- Monitoring of the ambient temperature and humidity of a public building.
- Comply with the law on energy transition which recommends an ambient temperature of 19 ° C in tertiary buildings and 22 ° C in hospitals.
- Limit periods of overheating.
- Rapid ROI thanks to energy savings.
- ATIM works with the largest energy suppliers.



- Guarantee the comfort and satisfaction of your clients.
- Ensure optimum temperature in all rooms.
- Control the building's energy budget.
- ATIM sensors are installed in many hotels in France and abroad.

- Monitor the temperature inside a work site electrical cabinet.
- Prevent the potential risk of fire due to an electrical overload or too high temperature.
- Locate your electrical cabinets on different sites and ease inventories thanks to the GPS version.
- ATIM equips thousands of construction sites for a major player in the construction industry.







# DEPORTED PROBE(S) TEMPERATURE

IoT sensor



CFG-APP



## Features

The TMxD can monitor one to two remote temperature sensors  $-55^{\circ}\text{C}$  |  $+125^{\circ}\text{C}$ .

It is commonly deployed in buildings, energy installations and cold chain control.

The measurements are regularly transmitted by radio (Sigfox or LoRa technology) and the configuration is done from the tools of the ATIM suite locally or remotely.

Compatible with the computer and mobile versions of the IoT web platform, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.



Range :  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  for TMxD  
 $-196^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$  for TMxP-CRYO

Precision :  $\pm 0.5^{\circ}\text{C}$  between  $-10^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for TMxD  
 $\pm 0.15^{\circ}\text{C}$  between  $-25^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  for TMxP



IP65 protection rating



1 or 2 temperature measurements/hour  
Sigfox 7+ years\*  
LoRaWAN 14+ years\*



Interchangeable batteries



Setup via USB, downlink or mobile app



Redundancy of data and datalogging modes



Visual signal showing network quality and sensor correct connection



Plug & Play

## References

Part number	Technology	
ACW/TM1D	Sigfox	LoRaWAN
ACW/TM2D	Sigfox	LoRaWAN
ACW/TM0P	Sigfox	LoRaWAN
ACW/TM1P	Sigfox	LoRaWAN
ACW/TM2P	Sigfox	LoRaWAN
ACW/TM1P-CRYO	Sigfox	LoRaWAN
ACW/TM2P-CRYO	Sigfox	LoRaWAN

\* Subjected to the environment conditions

\*\*Available with a subscription to Atim Cloud Wireless™ web platform

# COMPLY WITH SANITARY STANDARDS



Smart Building



Smart City



Smart Industry

- Monitor the temperature at the inlet to the outlet of the domestic water network.
- Comply with legislation requiring regular monitoring of the water temperature, which must be between 55 ° C and 60 ° C in all public buildings.
- Limit the legionella risk.



- Guarantee compliance with the cold chain and hygiene rules.
- Control the temperature of your cold rooms, refrigerated banks, refrigerated trucks.
- Keep the data transmitted in the event of an inspection.
- Control and avoid any health risk.

- Monitor the water temperature at the outlet of the network.
- Avoid overheating the water, it is advisable not to heat above 60 ° C to avoid the risk of severe burns.
- Reduce the energy bill by maintaining an optimal and constant temperature.





# DEPORTED PROBE TEMPERATURE - HUMIDITY

IoT sensor



CFG-APP












## Features

ACW-TCR is equipped with an instantaneous temperature sensor with inertia and a precise humidity sensor allowing you to ensure that the storage conditions are well respected.

Measurements are regularly transmitted via Sigfox or LoRaWAN networks and the configuration is configurable from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the IoT web platform\*\*, the data visualization, the remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

-  Range : -40°C to +125°C  
Precision : +/- 0.2°C between -25°C to +70°C
-  Range : 0% RH to 100% RH  
Precision : +/- 2% RH between 0 to 100 % RH
-  IP66 protection rating
-  1 temperature and 1 humidity measurements/hour  
Sigfox 2+ years\*  
LoRaWAN 6+ years\*
-  Interchangeable batteries
-  Setup via USB, downlink or mobile app
-  Redundancy of data and datalogging modes
-  Visual signal showing network quality and sensor correct connection
-  Plug & Play

## References

Part number	Technology	
ACW/TCR	Sigfox	LoRaWAN

\* Subjected to the environment conditions

\*\*Available with a subscription to Atim Cloud Wireless™ web platform



# COMPLY WITH SANITARY STANDARDS



Smart Building



Smart City



Smart Industry

- Monitor the storage conditions of goods during their transportation and logistics.
- Ensure an insurance coverage in the event of damaged good when cold chain is maintained and proved so.
- Increase food safety.



- Guarantee compliance with the cold chain and hygiene rules.
- Control the temperature of your cold rooms, refrigerated banks, refrigerated trucks.
- Keep the data transmitted in the event of an inspection.
- Control and avoid any health risk.

- Greenhouses require close supervision of temperature & humidity on specific locations.
- Central visualization of the measured conditions to take action for irrigation, and parameters adjustments.
- Increase crops development and production efficiency of gardens.





# SMART METERING

IoT sensor



CFG-APP



## Features

The MR4 facilitates the remote reading of meters with pulse output and also the reporting of dry contact status.

Each channel can be configured alternatively as a count or as a Boolean state of the corresponding input.

The information collected is transmitted regularly via the Sigfox or LoRaWAN networks or locally by installing one or more gateways on site.

Compatible with the computer and mobile versions of the ATIM Cloud Wireless web platform, the visualization of data, the remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

An ATEX zone 2 version is available with 2 inputs.



4 inputs to be setup in index metering or 30 Vmax dry contacts



IP65 protection rating



Up to 4 consumption measurements/hour  
Sigfox 2+ years\*  
LoRaWAN 7+ years\*



Interchangeable batteries



Setup via USB, downlink or mobile app



Redundancy of data and datalogging modes



Visual signal showing network quality and sensor correct connection



Plug & Play

## References

Part number	Technology	
ACW/MR4	Sigfox	LoRaWAN
ACW/MR2-EX	Sigfox	LoRaWAN

## Options

Mechanical head	Optical head	Opening /closing
CAPT-MECA	CAPT-OPTO	CAPT-DOCK

\* Subjected to the environment conditions

\*\*Available with a subscription to Atim Cloud Wireless™ web platform

# ENERGY AND SECURITY MANAGEMENT WITHIN A BUILDING



Smart Building



Smart City




Smart Industry



Utilities

- Monitor the consumption index of your electricity or water meters in real time.
- Analyse data and detect peaks in consumption.
- Identify the most energy-intensive workstations or sectors and develop an appropriate action plan to reduce consumption.
- Identify water leaks with an alert in the event of abnormal consumption.

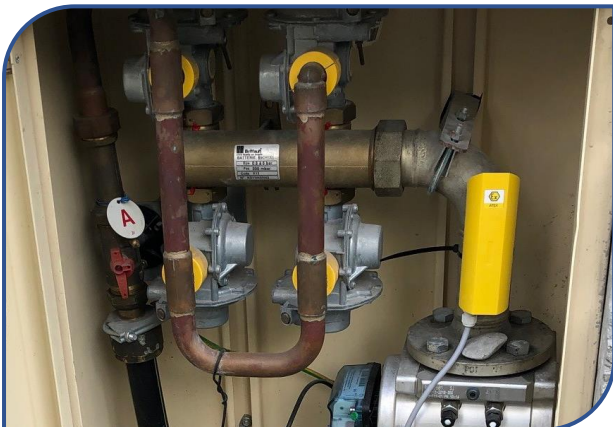

- Monitor the consumption index of your gas meters in real time.
- Quickly identify a gas leak in the event of unusual consumption.
- React quickly to avoid the risks associated with this leak.

- Connect the opening and closing system of a secured door to monitor a limited access site such as a warehouse.
- Detect an intrusion or an opening outside of common time slots.







# INFRARED PRESENCE DETECTION



IoT sensor



ACW-PIR90-I



ACW-PIR360-I



ACW-PIR90-O



ACW-PIR180-O



ACW-ILB



Distance detection: up to 100 meters  
Angle detection: 90 to 360°



IP30 protection rating -I versions  
IP54 or IP55 protection ratings -O versions



3+ years\* with 1 detection/hour versions -I  
5+ years\* with 1 detection/hour versions -O



Interchangeable batteries



Setup via downlink or factory settings



Plug & Play

## Features

The PIR range facilitates the monitoring of sites thanks to its detection modes.

There are two operating modes:

- alarm mode (intrusion detection)
- counting mode (determine percentages of attendance or occupancy)

The alerts are transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the IoT web platform\*\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

## References

Part number	Technology	
ACW/PIR90-I	Sigfox	LoRaWAN
ACW/PIR90-O	Sigfox	LoRaWAN
ACW/PIR180-O	Sigfox	LoRaWAN
ACW/PIR360-I	Sigfox	LoRaWAN
ACW/ILB30	Sigfox	LoRaWAN
ACW/ILB100	Sigfox	LoRaWAN

\* Subjected to the environment conditions

\*\*Available with a subscription to Atim Cloud Wireless™ web platform

# DETECT AND ALERT



Smart Building



Smart City



Smart Industry

- Analyse the occupancy rate of the various workspaces in a building.
- Organize the meeting room reservation schedule.
- Thanks to the information transmitted regularly, it is possible to ensure that the occupancy gauges (Covid-19) are respected.



- Depending on the information transmitted, it is possible to adapt the management of rooms and open spaces (cleaning, maintenance, etc.).
- Heating being a very expensive item, it will become easy to identify unoccupied rooms and adapt the heating system accordingly (energy savings).

- The alarm mode allows you to be warned in the event of an unwanted or intrusive presence.
- This operation is ideal for monitoring a protected access, an intrusion, or places with restricted access.
- Thanks to the alert sent immediately, the intervention is quick.





# LEAKS DETECTION

IoT sensor



## Features

The WL facilitates the monitoring of sites at risk of flooding thanks to its liquid presence detection options.

It is equipped with a volume buzzer alerting when a detection is made.

Alerts are transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the ATIM suite tools.

Compatible with the computer and mobile versions of the IoT web platform, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.



Presence of liquid detection



Buzzer alerting



Localisation of the leak



IP30 protection rating -I versions  
IP66 protection rating -O versions



5 to 10 years\*



Interchangeable batteries



Setup via USB, downlink or mobile app



Redundancy of data and datalogging modes



Visual signal showing network quality, sensor correct connection and liquid detection



Plug & Play

## References

Part number	Technology	
ACW/WL-I	Sigfox	LoRaWAN
ACW/WL-O	Sigfox	LoRaWAN

\* Subjected to the environment conditions

\*\* Available with a subscription to Atim Cloud Wireless™ web platform



# REAL-TIME ALERTS TO PREVENT DAMAGE



Smart Building



Smart City



Smart Industry



Utilities

- Watch for water leaks in data centers and avoid the risk of fires and floods.
- Avoid downtime as well as the damage caused.



- Watch for water leaks and the risk of flooding in underground heat networks.
- Respond quickly in the event of an alert and shut off the water supply.
- Reduce water consumption by preventing and repairing water leaks.
- The ACW/WL(L) has been in operation on heating networks since 2012.

- Detect liquid leaks in electrical transformer stations.
- React quickly from the alert to avoid a power outage that would deprive a number of homes of electricity.





# ULTRASONIC DISTANCE

IoT sensor



CFG-APP



## Features

The ACW/LVL is intended for remote monitoring of the levels of many types of containers, such as dumpsters, agricultural silos or even liquid tanks.

It facilitates the wireless reporting of a distance thanks to its powerful ultrasonic sensor.

The measurements are regularly transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the IoT web platform\*\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.



Range: 20 cm to 5 m  
Precision: 1% of measurement



IP67 protection rating



5+ years\* with 24 measurements/day



Interchangeable batteries



Setup via USB, downlink or mobile app



Redundancy of data and datalogging modes



Visual signal showing network quality and sensor correct connection



Plug & Play

## References

Part number	Technology	
ACW/LVL	Sigfox	LoRaWAN

\* Subjected to the environment conditions

\*\* Available with a subscription to Atim Cloud Wireless™ web platform

# MONITOR THE FILLING LEVEL OF TANKS



Smart Building



Smart City



Smart Industry

- Monitor snow levels to prevent heavy snowfall.
- Identify the height of snow during heavy falls.
- React and take safety measures when levels are high or critical.



- Remotely monitor the filling rate of fuel, waste or grain containers.
- Collect measurement data from tanks installed in locations that are difficult for technicians to access.
- Organize filling.
- Optimize rounds and orders.

- Monitor the water level of a river.
- Identify rising water levels during heavy rains.
- React and take safety measures when you notice the level rising too quickly.










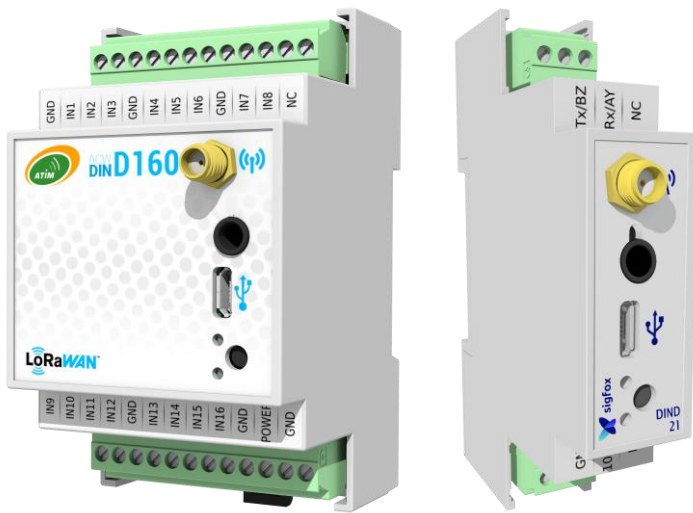


# SMART METERING / CONTROL REMOTE EQUIPMENTS

IoT sensor



-  1 to 16 dry contacts inputs: 30Vmax
-  Up to 8 inputs in metering mode
-  10-30 Vdc external power supply
-  Setup via USB, downlink
-  GPS option in LoRaWAN

## Features

The DINDxx facilitates the reporting of the status of up to 16 dry contacts or up to 8 pulse counter indices.

It also allows to remotely control industrial equipment and to check their proper functioning (up to 8 outputs).

A Jack connector allow the addition of a digital probe, available in option.

The readings are regularly transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the ATIM suite tools.

Compatible with the computer and mobile versions of the IoT web platform\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

## References

Part number	Technology	
ACW/DIND21	Sigfox	LoRaWAN
ACW/DIND44	Sigfox	LoRaWAN
ACW/DIND80	Sigfox	LoRaWAN
ACW/DIND88	Sigfox	LoRaWAN
ACW/DIND160	Sigfox	LoRaWAN
ACW/DINDIO80-G	LoRaWAN + GPS	
ACW/DINDIO160-G	LoRaWAN + GPS	

\*Available with a subscription to Atim Cloud Wireless™ web platform

# SUPERVISE AND CONTROL YOUR EQUIPMENT



Smart Building



Smart City




Smart Industry



BTP

- Communicate with the automatons of a production line.
- Immediately detect a failure or a stop and react quickly.
- Reset the PLC remotely thanks to the dry contact outputs.
- Increase the productivity of the production line by limiting downtime and making installations more reliable.

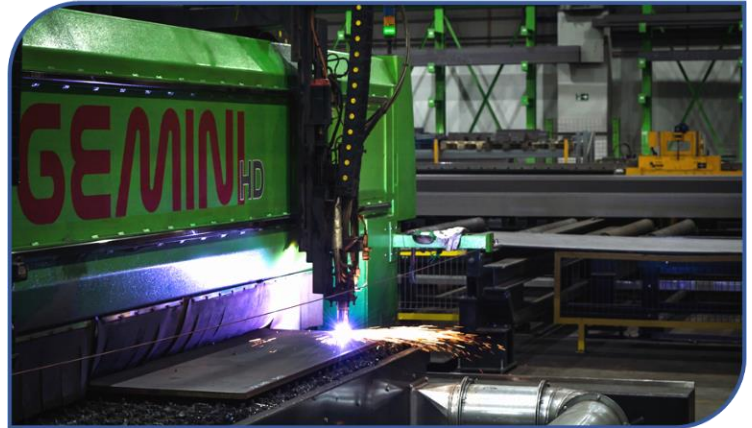

- Connect the public lighting of a city.
- Quickly identify a failure, react quickly to restore normal operation.
- Remotely turn on or off the lighting in a specific area.
- Reduce the city's energy consumption by ensuring compliance with regulatory lighting ranges.

- Detect a circuit breaker in an electrical cabinet.
- Control the number of stops of the construction equipment.
- Improve site productivity by reducing the number and hours of downtime (a stopped crane represents a significant financial loss).
- Product of the year selected by a major construction company for all its public worksites in France.





# MODBUS GATEWAY

IoT sensor



- Modbus** Reading and writing of up to 833 registers
- RS485 connection**
- LoRaWAN class C**
- 10-30 Vdc external power supply**
- Setup via USB, downlink**


## Features

The DINRSM facilitates the transfer of Modbus information.

Through a RS485 serial connection, it interfaces with modbus slaves industrial PLCs and can interrogates up to 833 modbus registers.

The readings are regularly transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the IoT web platform\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

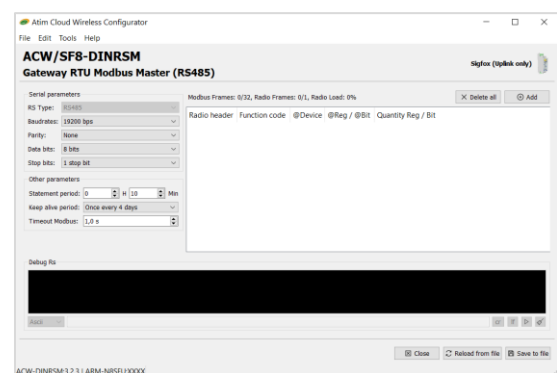

## References

Part number	Technology
ACW/DINRSM	Sigfox    LoRaWAN

\*Available with a subscription to Atim Cloud Wireless™ web platform



# SUPERVISE YOUR EQUIPMENT AND PLCs



Smart Industry




Utilities

- Interrogate isolated sensors such as soil sensors (temperature, humidity, pH, etc.).
- Consult sensor information on the Internet and analyse the data.
- Adapt the management of your crops (irrigation, solenoid valve control).



- Consult your meter data (voltage, current, active power, reactive power).
- Read regularly the data of the remote sub-meters.

## USAGE SCHEME : DATA TRANSMISSION BY SERIAL LINK TO THE NETWORK

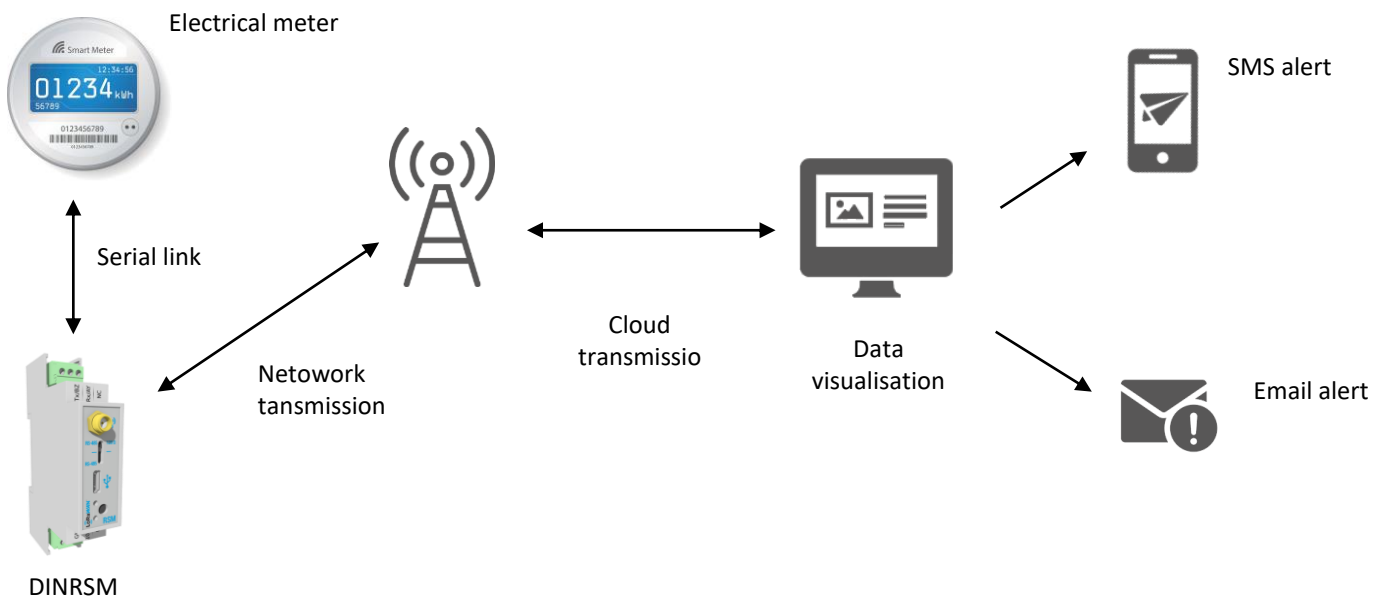



# 4-20 MA OR 0-10 V GATEWAY

IoT Sensor



- 1 analogue input 4-20 mA | 0-10 V
- 2 dry contacts inputs: 30Vmax
- 10-30 Vdc external power supply
- Setup via USB, downlink


## Features

The DINDA facilitates the transfer 1 analogue input 4-20 mA or 0-10V.

Through a serial connection, it interfaces with any equipment with such analogue outputs. There are 2 dry contacts inputs available additionally.

The readings are regularly transmitted on Sigfox or LoRaWAN networks and its configuration is configurable from the tools of the ATIM suite.

Compatible with the computer and mobile versions of the IoT web platform\*, data visualization, remote parameterization of the sensor and the configuration of alerts according to predefined thresholds are made possible in a few clicks.

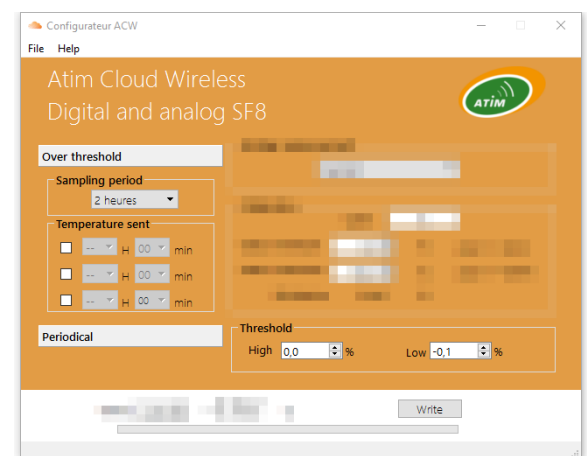

## References

Designation	Technology
ACW/DINDA	Sigfox LoRaWAN

\*Available with a subscription to the Atim Cloud Wireless™ web platform.

# ANALOGUE DATA MONITORING



Smart Building



Smart City



Smart Industry

- Connect your anemometers to the network
- Get real-time information on wind power
- Quickly identify a favorable window for energy production
- Anticipate risks and accidents related to strong winds



- Query isolated sensors such as soil sensors (temperature, humidity, pH, etc.).
- Consult sensor information on the Internet and analyze the data.
- Adapt the management of your crops (irrigation, solenoid valve control).

- Query isolated sensors such as soil sensors (temperature, humidity, pH, etc.).
- Consult sensor information on the Internet and analyze the data.
- Adapt the management of your crops (irrigation, solenoid valve control).







# NETWORK TESTER

IoT sensor



- Quality of network
- Push button
- Visual LED
- Signal quality color scale
- USB rechargeable battery
- Plug & Play

## Features

The ACW/TST is a tester that allows you to check the radio coverage and signal reception quality of Sigfox and LoRaWAN networks.

It allows you to optimize and validate the positioning of your IoT sensors in the field.


The operation is very simple: a push on a button and a colour code indicates the radio quality.

A registration of the ACW/TST on a public or private IoT network is required to test its quality.

Compatible with computer and mobile versions of the IoT web platform\*, the visualization of the network quality is made possible in a few clicks.

## References

Part number	Technology
ACW/TST	Sigfox LoRaWAN

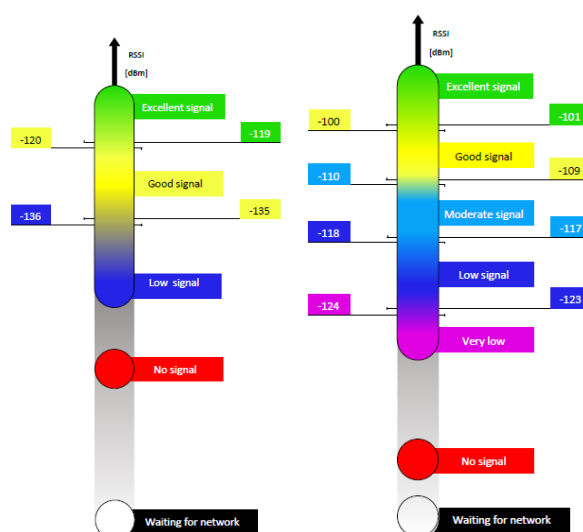

\*Available with a subscription to Atim Cloud Wireless™ web platform





# LoRaWAN REPEATER

IoT sensor



Repetition mode



Up to 8x ACW/LoRaWAN sensors supported



IP65 protection rating



220V power supply



Option: solar panel power supply

## Features

The LW8-GW allows the densification of the LoRaWAN network.


It matches typically for sensors located on blank coverage and isolated areas: especially on basement boiler rooms, underground car parks, pipes, etc...

Thanks to its proprietary protocol, it facilitates the transmission of up to 8 isolated sensors.

Frames received by the sensors are regularly transmitted on the LoRaWAN backend, both operator and private, and its configuration is configurable from the tools of the ATIM suite.

## References

Part number	Technology
ACW/LW8-GW	LoRa

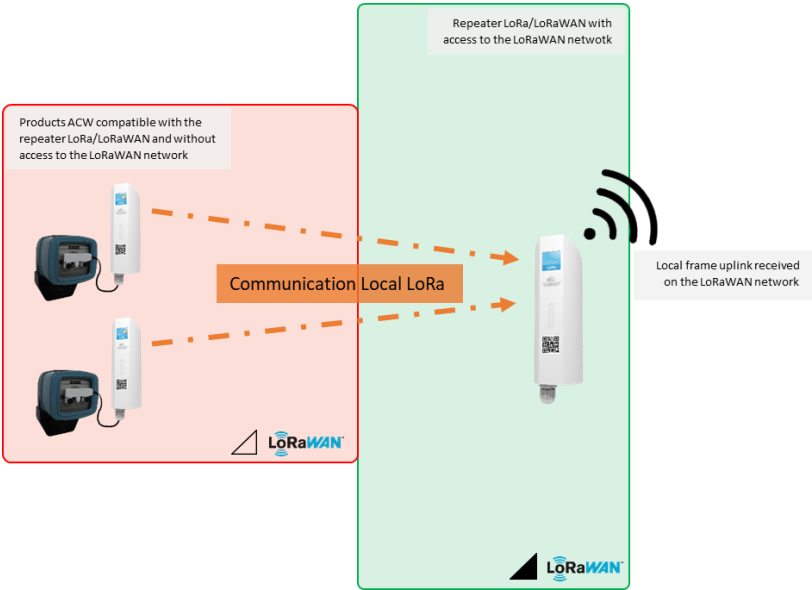

# MODBUS RADIO MODEMS

ADVANCED RADIO MODEM®







# MODBUS ETHERNET TRANSMISSION

Radio modem



Modbus slave, mirror Modbus RTU or Modbus TCP to Modbus RTU modes



RS232 or RS485 connection



Mirror mode



1 digital input + 1 digital output



10-30 Vdc external power supply



Setup and update via Ethernet



10+ km\* radio range

## Features

The ARM/868-SE is a radio modem that enables remote communication via serial or ethernet link.

It can be used as a bridge between multiple Ethernet devices.

The modem is equipped by RS232/RS485 serial port for transparent, secured or Modbus mode communications.


The ARM/868-SE also deals with a repeater mode.

The applications are numerous: timing, lapping time report, digital display, road signs, water and energy management, camera control, telemetry, quarries, mines or industrial radio transmissions...

\* Subjected to the environment conditions

## References

Part number	Technology
ARM/868-SE	Local 868MHz

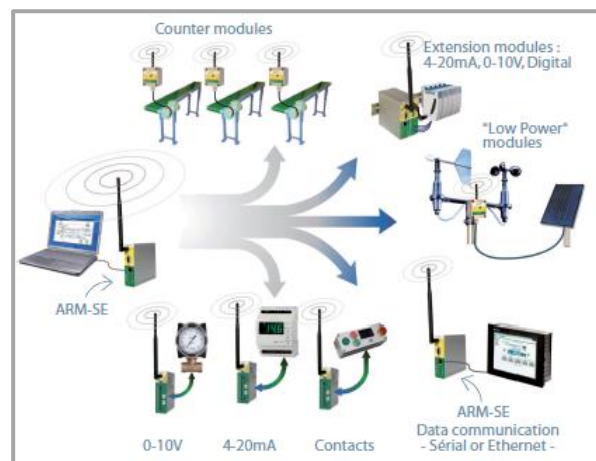



# ANALOGUE | DIGITAL INPUTS-OUTPUTS

Radio modem



M2M



Sigfox



## Features



2 digital inputs/outputs



Option: up to 4 digital/analogue inputs/outputs



RS485 connection



Modbus Slave mode



10-30 Vdc external power supply



Setup and update via USB



Radio range:  
10+ km\* in Local 868MHz  
6+ km\* for Sigfox|LoRaWAN

The ARM-Dxxxx is a radio modem that monitors digital/analogue inputs/outputs that are sent via P2P radio or through Sigfox| LoRaWAN networks.

By default, the modem deals with 2 digital inputs + 2 digital outputs.  
In option, up to 4 digital/analogue inputs/outputs can be added.

In P2P, the modem can be setup in Mirror or Modbus Slave modes.

For example

- 2 digital inputs
- 2 digital outputs
- 1 analogue input
- 1 analogue output

ARM-Dxxxx  
I/O Digital  
I/O Analog

The reference is **ARM-D2211**

## References

Part number	Technology		
	Local	Sigfox	LoRaWAN
ARM/Dxxxx			
ARM/D88 (option)			



# BRIDGE MODBUS RADIO MODEM

Radio modem



Bridge mode



RS232 or RS485 connections



10-30 Vdc external power supply



Setup via USB



22+ km\* radio range

## References

Part number	Technology
ACW/DINRS+	Local 868MHz


## Features

ACW-DINRS+ transmits data from one Modbus device to another via radio.  
500mW radio power provides a great range suitable for many applications.

The devices are connected to the PLCs via an RS232 or RS485 link (transparent mode).

Bridge mode: allows you to create a point-to-point or point-to-multipoint link by interconnecting devices equipped with an RS232 or RS485 interface.


The bridge mode setup is to be made on the ACW configurator.

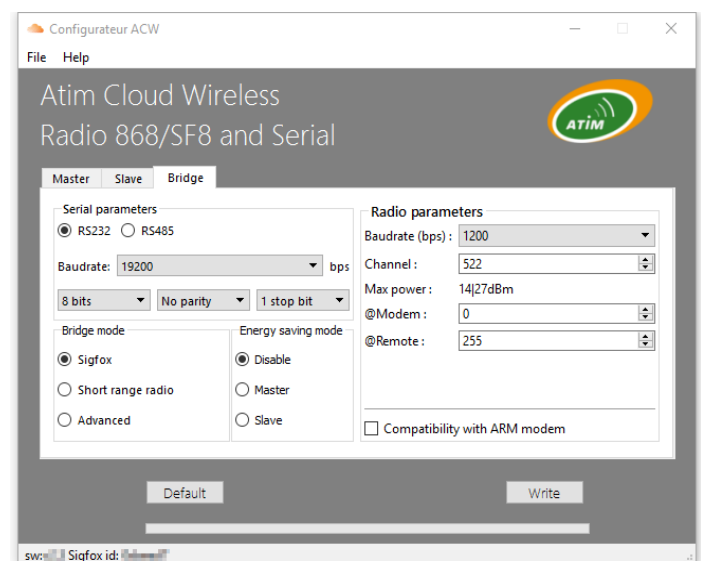

\* Subjected to the environment conditions

# RADIO MODULES

ADVANCED RADIO MODEM®

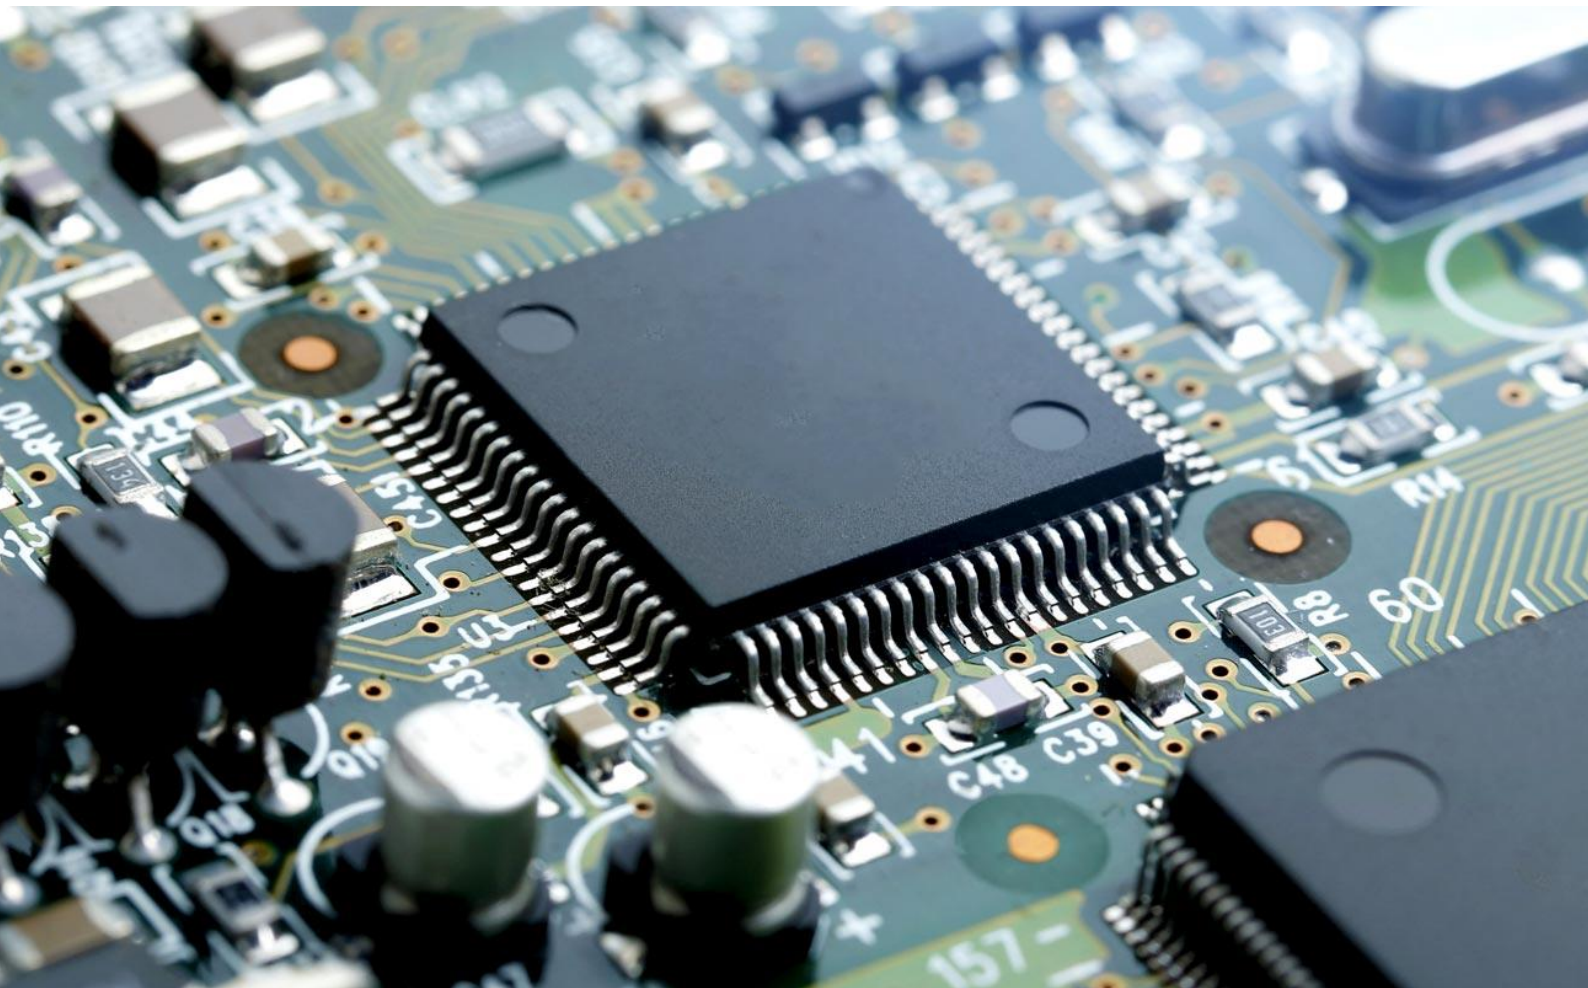



## Sigfox module



Operates on every single Sigfox radio zones thanks to its Monarch embedded service. This module deals with ultra high sensibility and optimized consumption.

The module is available in two versions:

- RC1 without Monarch Option
- RC1-2-3-4-5-6 Monarch embedded

Part number	Technology
ARM-N8-SF	Sigfox RC1
ACW-NWW	All Sigfox RCz

Power Tx	25mW / 200mW
Sensitivity	-131 dBm
Current Rx (3,3V)	17,8 mA
Current Tx ( 14 dBm / 3,3V )	23 mA
Current Tx ( 22 dBm / 3,3V )	177 mA
Standby current	1,25 $\mu$ A
Dimensions	30 x 18 x 2 mm

## LoRa-LoRaWAN module



Ultra high sensibility : -141 dBm (SF12). Operates on both LoRa P2P et LoRaWAN. In addition to the “standard” mode, the “standalone” mode enables immediate operation via settings, without any additional programming.

Part number	Technology
ARM-N8-LRW	LoRaWAN

Power Tx	25mW / 100mW
Link budget	+ 155 dB/+161 dB
Datarate	300 à 47 Kbits/s
Current Tx	53 mA/120 mA
Current Rx	22 mA
Standby current	<1 $\mu$ A
Dimensions	30 x 18 x 2 mm

## Point to Point modules



Same form factor than the ARM module product line, N8-LP and N8-LD modules are optimized for a local mode communication in 868 MHz.

ARM-N8-LD with a radio power of 500mW (27dBm) allows a long-distance radio transmission (20+ km on sight) when the ARM-N8-LP has a very low power consumption.

Part number	Technology
ARM-N8-LP	Local 868MHz
ARM-N8-LD	Local 868MHz

	N8-LD	N8-LP
Power Tx	500mW	25mW
Link budget	+ 149 dB	+ 137 dB
Datarate	1200 à 115 200 bits/s	1200 à 115 200 bits/s
Current Tx	500 mA	62 mA
Current Rx	33 mA	30 mA
Standby current	<1 $\mu$ A	<1 $\mu$ A
Dimensions	30 x 18 x 2 mm	30 x 18 x 2 mm

# EXTENSION CARDS

ATIM CLOUD WIRELESS®



M2M<sup>™</sup>



## ACW-USB



The USB dongle allows to integrate the ATIM ARM-Nano modules to your development board equipped with USB ports. Plug it in to access to Sigfox or LoRaWAN™ networks.

Part number	Technology		
ACW-USB	Local 868MHz	Sigfox	LoRaWAN

## ACW-RPI



This adaptation card allows you to easily integrate the Sigfox or LoRaWAN™ technology on Raspberry Pi boards.

Part number	Technology		
ACW-RPI	Local 868MHz	Sigfox	LoRaWAN

## ACW-XBEE



The shield for the XBee™ module allows you to integrate easily the Sigfox or LoRaWAN™ technology into your microcomputer and connect your device to LPWANs.

Part number	Technology		
ACW-XBEE	Local 868MHz	Sigfox	LoRaWAN

## ACW-DUINO



The ACW-DUINO shield provides connection to LPWANs from your Arduino board.

Part number	Technology		
ACW-DUINO	Local 868MHz	Sigfox	LoRaWAN

ACW-MPCIE

PCI

EXPRESS



This card connects to the Mini PCI Express bus and allows you to easily integrate Sigfox or LoRaWAN™ technology on your development boards.

Part number		Technology		
ACW-MPCIE		Local 868MHz	Sigfox	LoRaWAN

ACW-SDK

SDK



This SDK “Starter Development Kit” will allow you to test ATIM ARM-Nano product line easily. Standard pack includes a battery pack and a USB connector.

Part number		Technology		
ACW-SDK		Local 868MHz	Sigfox	LoRa-LoRaWAN

ACW-MANGO

mangOH




This Shield adapts to the MangOH® and allows you to easily integrate Sigfox or LoRaWAN™ technology into your microcomputer.

Part number		Technology		
ACW-MANGO		Local 868MHz	Sigfox	LoRaWAN



# CUSTOM SOLUTION

IoT & RADIO FREQUENCIES EXPERT

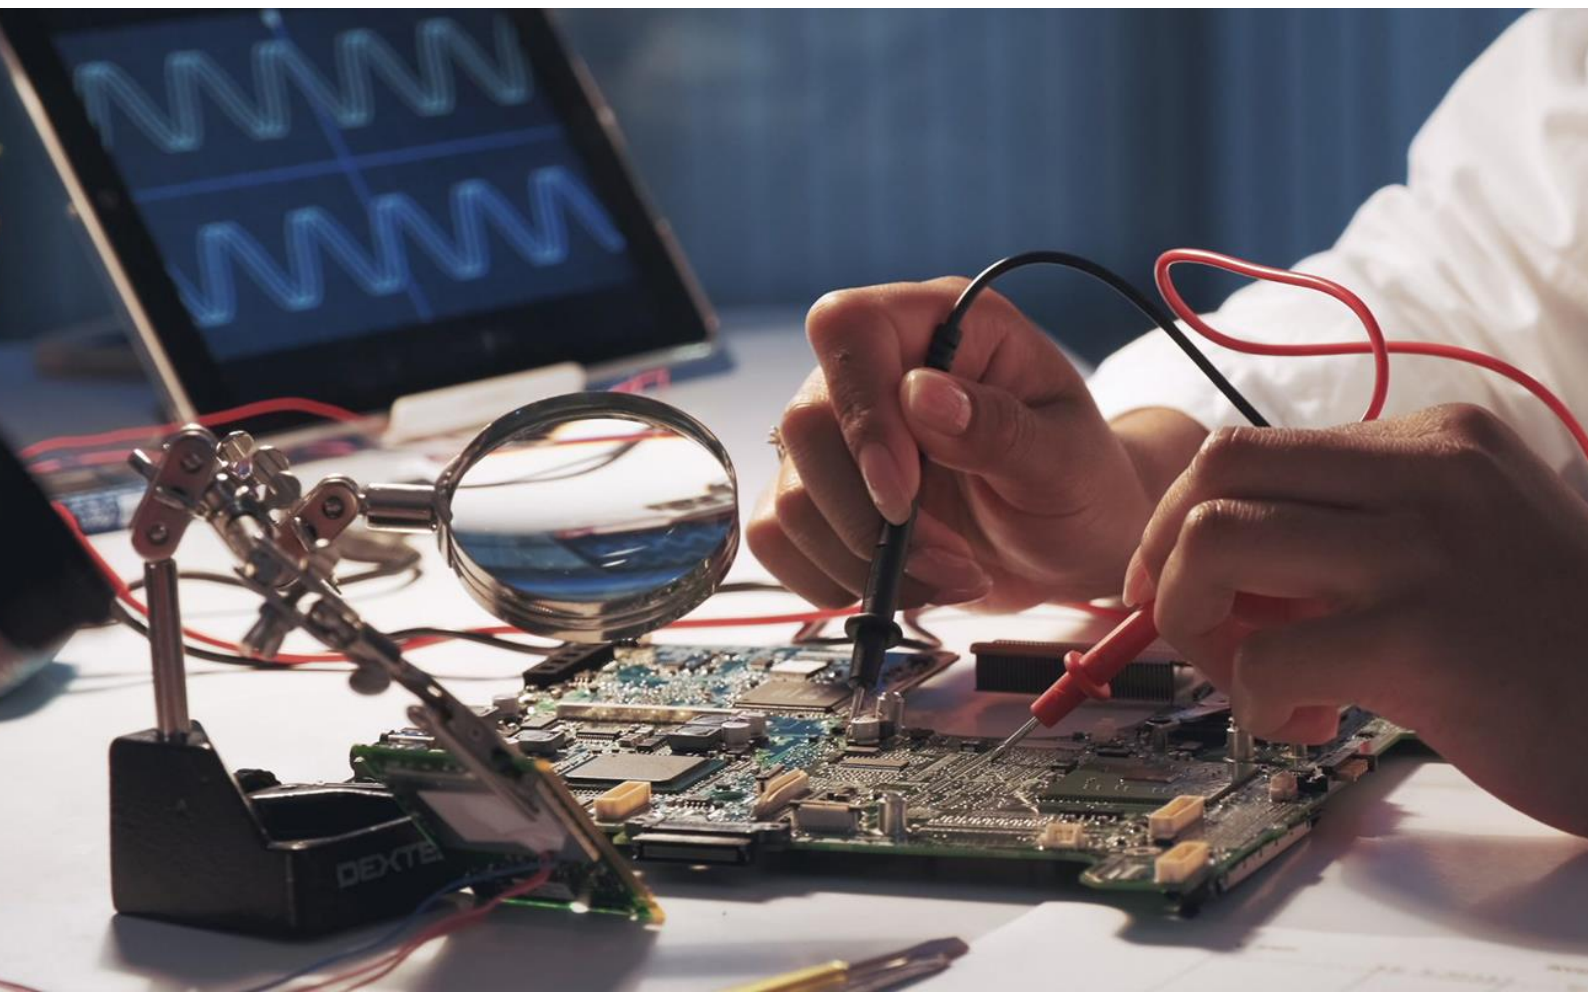

ATIM supports you in the design and industrialization of your product including a radio frequency communication brick.



Redaction of specifications



Prototype




Industrialization


Presale discussion



Development

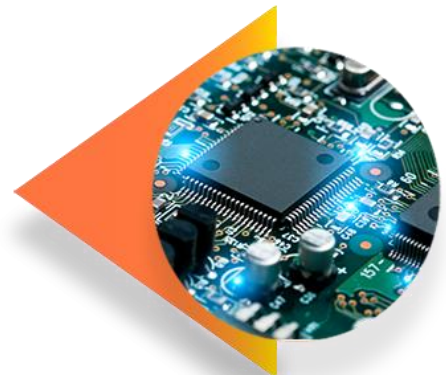

Certification

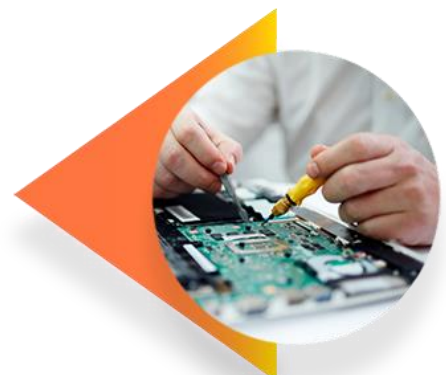





Chemin des Guillets  
38250 VILLARD DE LANS – France

Standard: +33 (0)4 76 95 50 65

[contact@atim.com](mailto:contact@atim.com)  
[www.atim.com](http://www.atim.com)

