

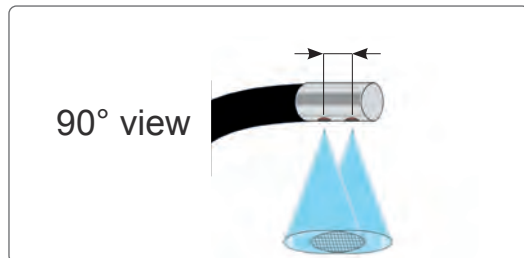
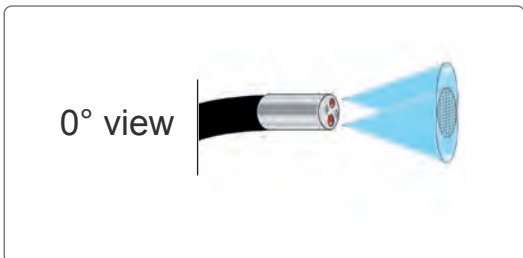



# iX3D Flexible Scope Measurement System

Professional 2D and 3D measurement

3D point cloud

Extremely easy to use

Result in less than 1 minute



## Efficient borescopy with **stereo vision**

iX3D is a precise and modular working videoendoscope system for the execution of 2D and 3D surface inspection and measurement functionality in hard-to-reach areas.

The system offers 2 light weighted probes (0° forward view + 90° side view), each equipped with a stereo vision camera system generating 3D data. The simple and user-friendly **interface and measurement software is intuitive.**

The monitor unit can be positioned independently of the probe. The probes have a very low weight. Both allow **almost unlimited use in any environment.**



## Easy and fast usage with iX3D software

- Intuitive usage. **No complex training/instructions/manual necessary**
- Only several clicks/settings for **measurement result in less than 1 minute**
- Inspection mode without measurement functionality
- Measurement mode with necessary measurement functions

## High measuring accuracy

- Magnifier for setting measurement points
- 360° 3D model view (incl. zoom in/off of model)/colored 3D depth map
- Both **show in detail how measurement points are set**

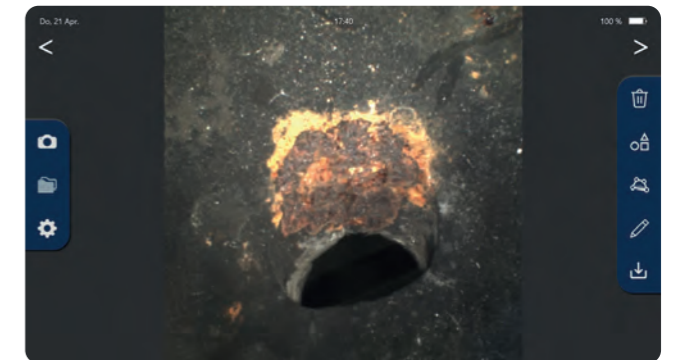
## Flexible monitor unit

- The monitor unit (10" display with touch functionality) **can be placed and used independently of the handheld probe** and in any location.
- Robust rugged tablet PC for industrial use with a ultra bright durable display.
- 10.1 inch touch screen for optimal visual inspection, can be operated with gloves
- Good performance in direct sun light due to the bright display.



## Software Features

- Modern and **intuitive user interface in the style of a smartphone app.**
- Enhance and filter camera images (e.g. brighten, sharpen, contrast adjustment, invert colors).
- Simple and extensive file management including quickly accessible display of the last recordings.



## File management

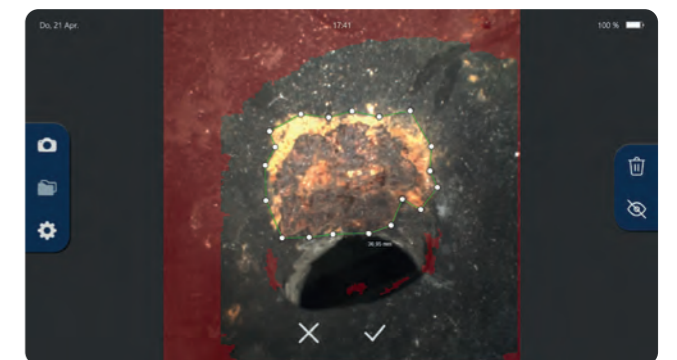
- Can be stored in the internal file manager of the endoscope system
- Can be directly stored in a network drive of your company (endoscope + file drive have to be connected to same wireless LAN network)

## Remote access and collaboration


- **Direct remote access to inspection and measurement** via additional/optional remote software (not included). Support team in your company can follow inspection/measurement on a live basis.

## Measuring features and reporting


- Different measuring functions available:
  - Point to Point
  - Point to Line
  - Point to Plane
  - Multipoint
  - Max Point to Line
  - Plane
- Add comments, label and measurement results to stored images
- Precise setting of the measuring points through availability of magnifier for the points
- Highlighting of the measurable range facilitates image evaluation
- Colored 3D depth map and 360° 3D view



## Easy and fast usage with iX3D software

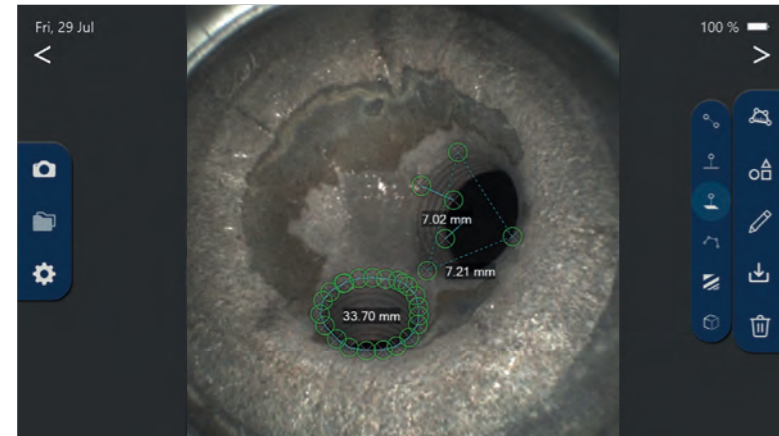

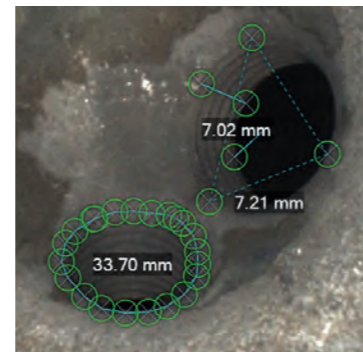A good reliable result in less than 1 minute.




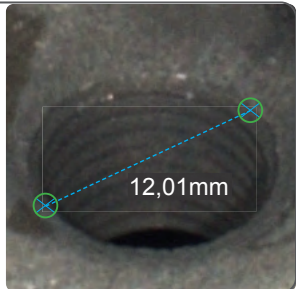
The usage of the software is so intuitive that you get fast results **without need for complex training/ instruction manuals** for the measurement. From the moment of starting the iX3D software you need **4 clicks for the camera settings** and **another 7 clicks to get your measurement result**.

## Different measurement types and control for honest results

**1**

**point to point**

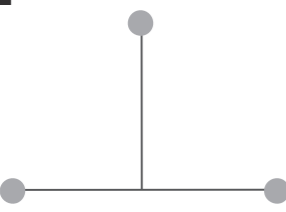
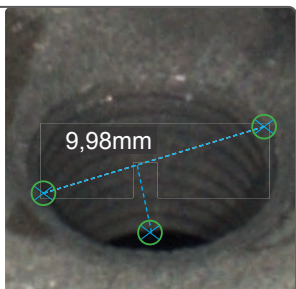
- Set 2 measurement points
- Result shows distance between both points in mm

**2**

**point to line**



- Set 2 points to define reference line
- Set 3. point as measurement point
- Result shows shortest distance between measurement point and reference line in mm

**3**



**point to Plane**

- Set 3 points to define the reference Plane area
- Set 4. Point as measurement point
- Result shows shortest distance between measurement point and the middle of reference area

## Measurement in images

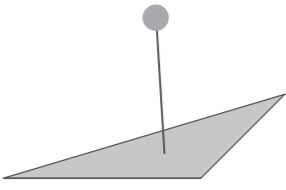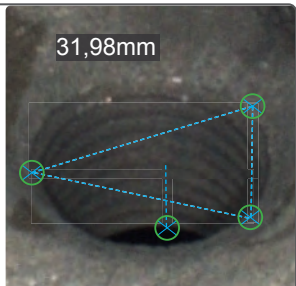Images taken in measurement mode show areas (in red color) for which there are not enough 3D data for measurement available.

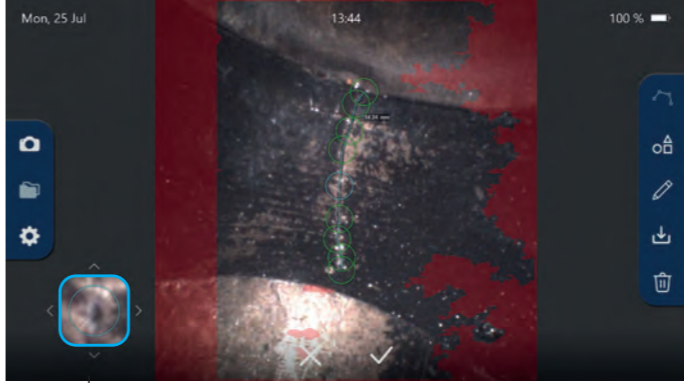High reliability of measurement due to:  
Exact measurement point magnification


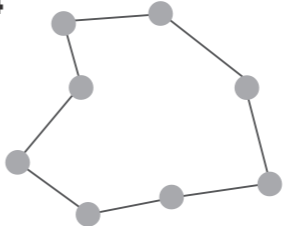
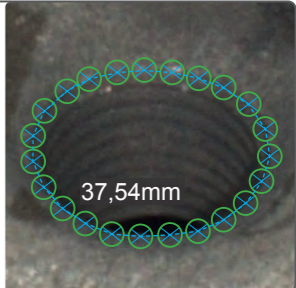


Image enhancement i.e., use "color inversion" for images with low contrast items

**4**

**multipoint**


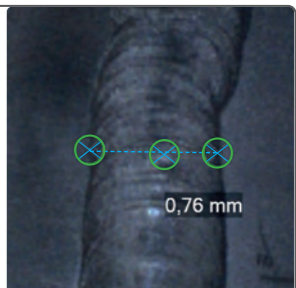
- Set points to define the multipoint line
- Result shows distance between all measurement points in mm

**5**

**max point to line**

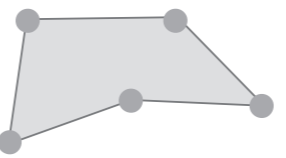
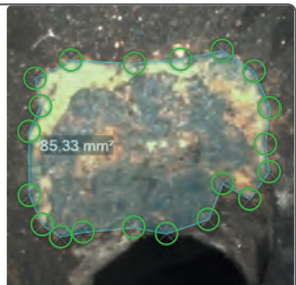
- Set 2 points to define reference line
- Automatic display of maximum distance to line/profile ((height/depth measurement))

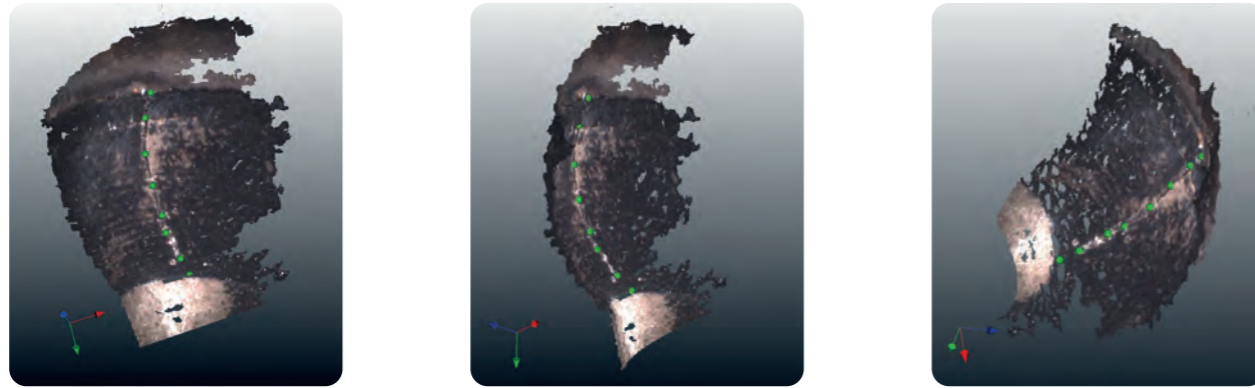
**6**

**plane**


- Set points to define the multipoint line
- Result shows area calculation in the middle of the set marks

### Measurement point control in 3D view




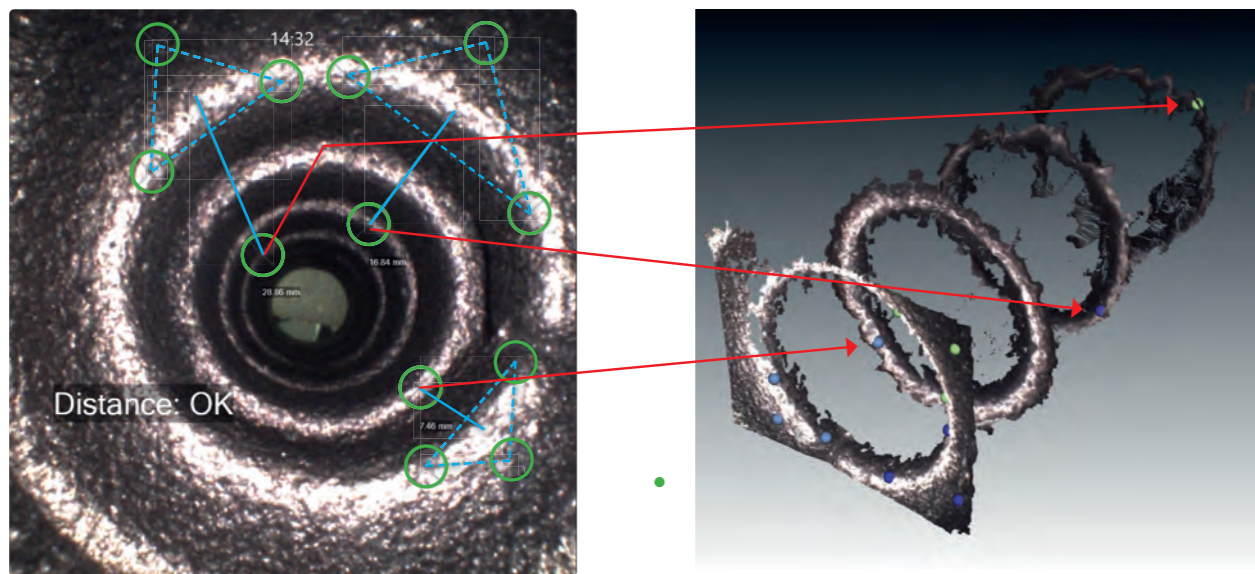360° 3D view of image and measurement points / Depth map display / zoom in/out for details




High resolution 3D- view of color image and measurements, making part inspection and measurement verification very easy.

### Coloured representation of the depth distances in the inspection area

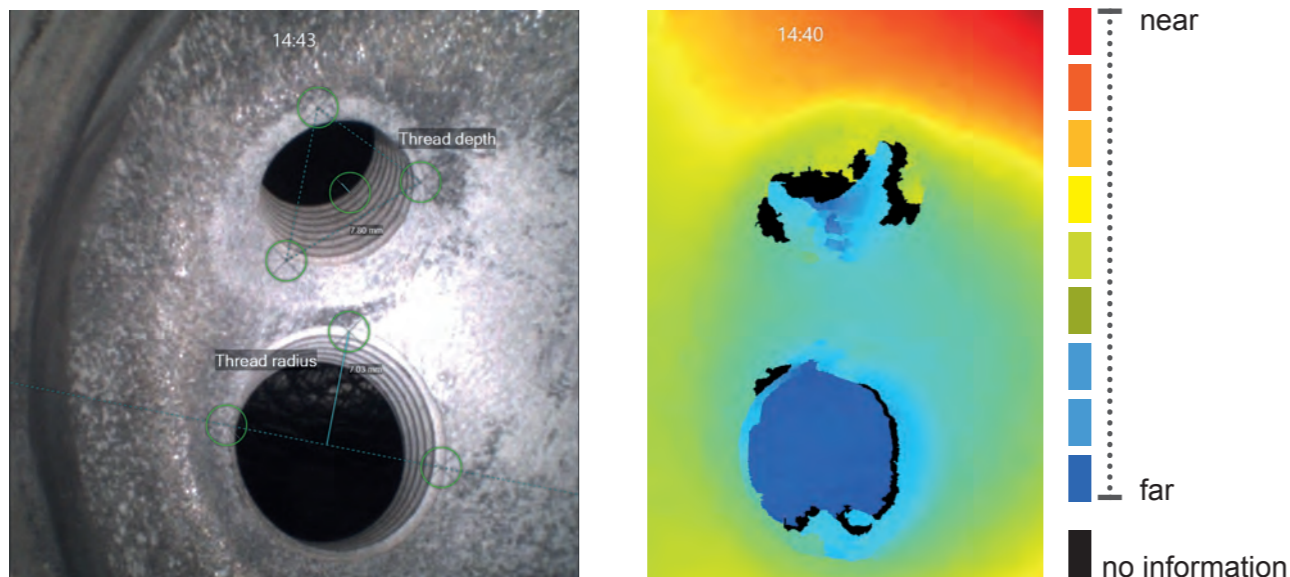

Color representation of depth - each layer shows a different color

### Exchange Scopes in seconds

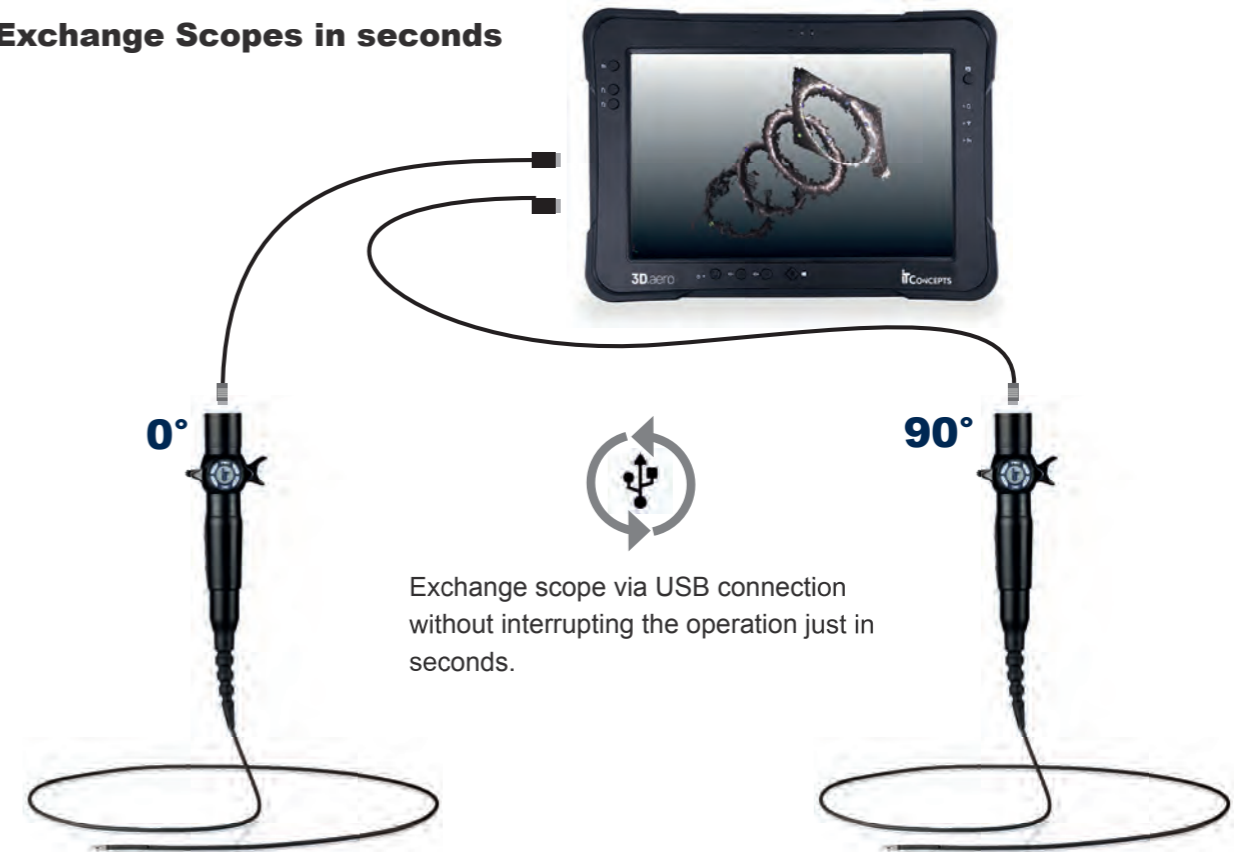

Exchange scope via USB connection without interrupting the operation just in seconds.


### Customer support by OEM/Sales Partners

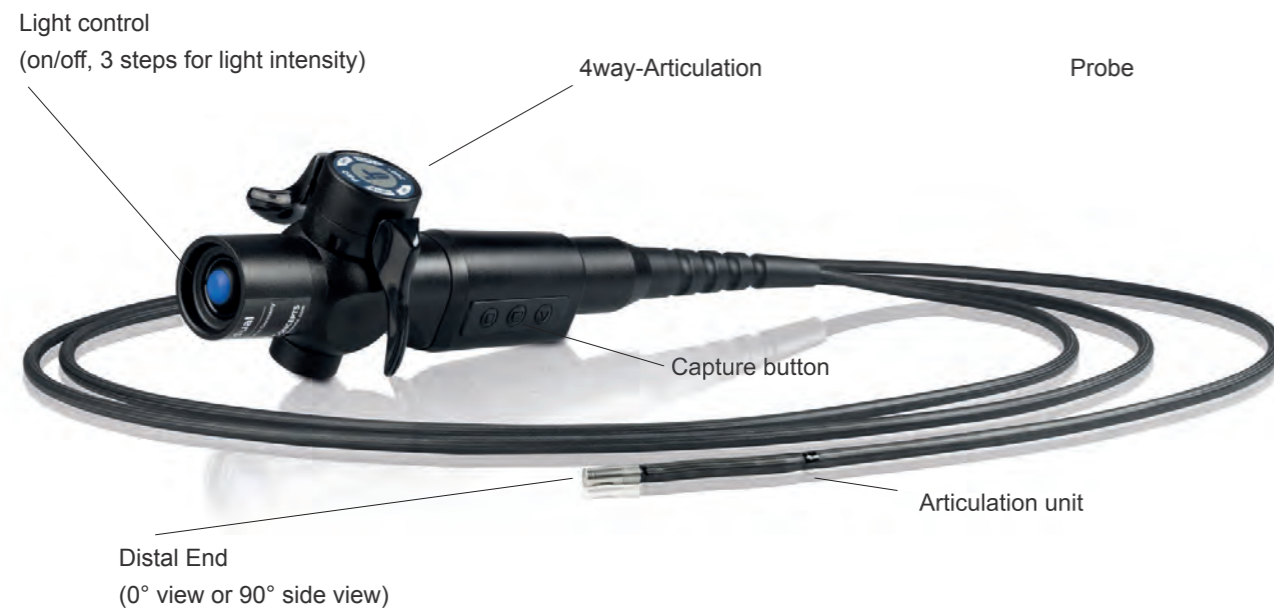- OEM/Sales Partners can offer customer support/training and direct remote access to the tablet PC via a remote software (not included).

### Delivery



## PROBE AND PROBE CONTROL



### Probes 6,0mm

Working length	1,5 - 7,5
Direction of view	0° / 90°
Articulation (4-way)	4-way

### Illumination

Typ	High-power LED on the TIP
Illumination control:	3 steps

Weight:	1.65Kg (+/- depece on probe diameter and working length)
Tip operating temperature:	140°C less than 5 Minutes/ -25°C to +80°C
System operating temperature:	-25°C to +46°C
Storage temperature:	-25°C to +60°C
Relative humidity:	95% less than - non condensing
Waterproof:	Probe and distal End up to 1 bar- 10.2m H2O
Resistance:	Probe and distal End to oils and saline (5%)
Sensor 0°	<b>HD AIT Advanced Image Sensor</b>
Sensor 90°	<b>HD AIT Advanced Image Sensor</b>

## iX3D PAD (Tablet PC as monitor)



Processor	Intel® Core™ i5-7300U (2x 2.60 GHz up to 3.50 GHz with Intel® Turbo Boost Technology, HD 620, 3M cache)
Operating system	Windows® 10 Pro 64-bit
Optional operating system	Windows® 10 IoT
Display size	10.1" (25.65 cm)
Display Technology	Sunlight Readable Outdoor display with digitizer support
Resolution	1,920 x 1,200 pixels (WUXGA)
Brightness	1,000 cd/m <sup>2</sup>
Screen protector	Corning® Gorilla® Glass
Touchscreen	Capacitive
Touch operation	Multi-touch
RAM (permanently soldered)	8 GB DDR3 SDRAM
Hard disk	512 GB SSD M.2
WLAN	IEEE 802.11 a/b/g/n/ac
Interfaces	1x USB 3.1 Type-A™, 1x USB 3.1 Type-C™ (1,5A), 1x microHDMI, 1x LAN (1Gbs), 1x serial (RS232), 2x RF Pass-through port (for WLAN, GNSS, WWAN), Docking port
Camera front	2.0 megapixels
Rear camera	8.0 megapixels
Military standard	MIL-STD 461G, MIL-STD 810G
Degree of protection	IP 65
Battery	6-cell Li-ion battery, approx. 4,500 mAh (12-month guarantee)
Battery life up to	11 hours
Power supply	65 watts, external
Input:	100-240V AC /Output: 19V DC / 3.42A
Weight	1,360g
Dimensions (WxHxD)	280 x 195 x 23mm

## iX3D Measurement software with PXL+ technology

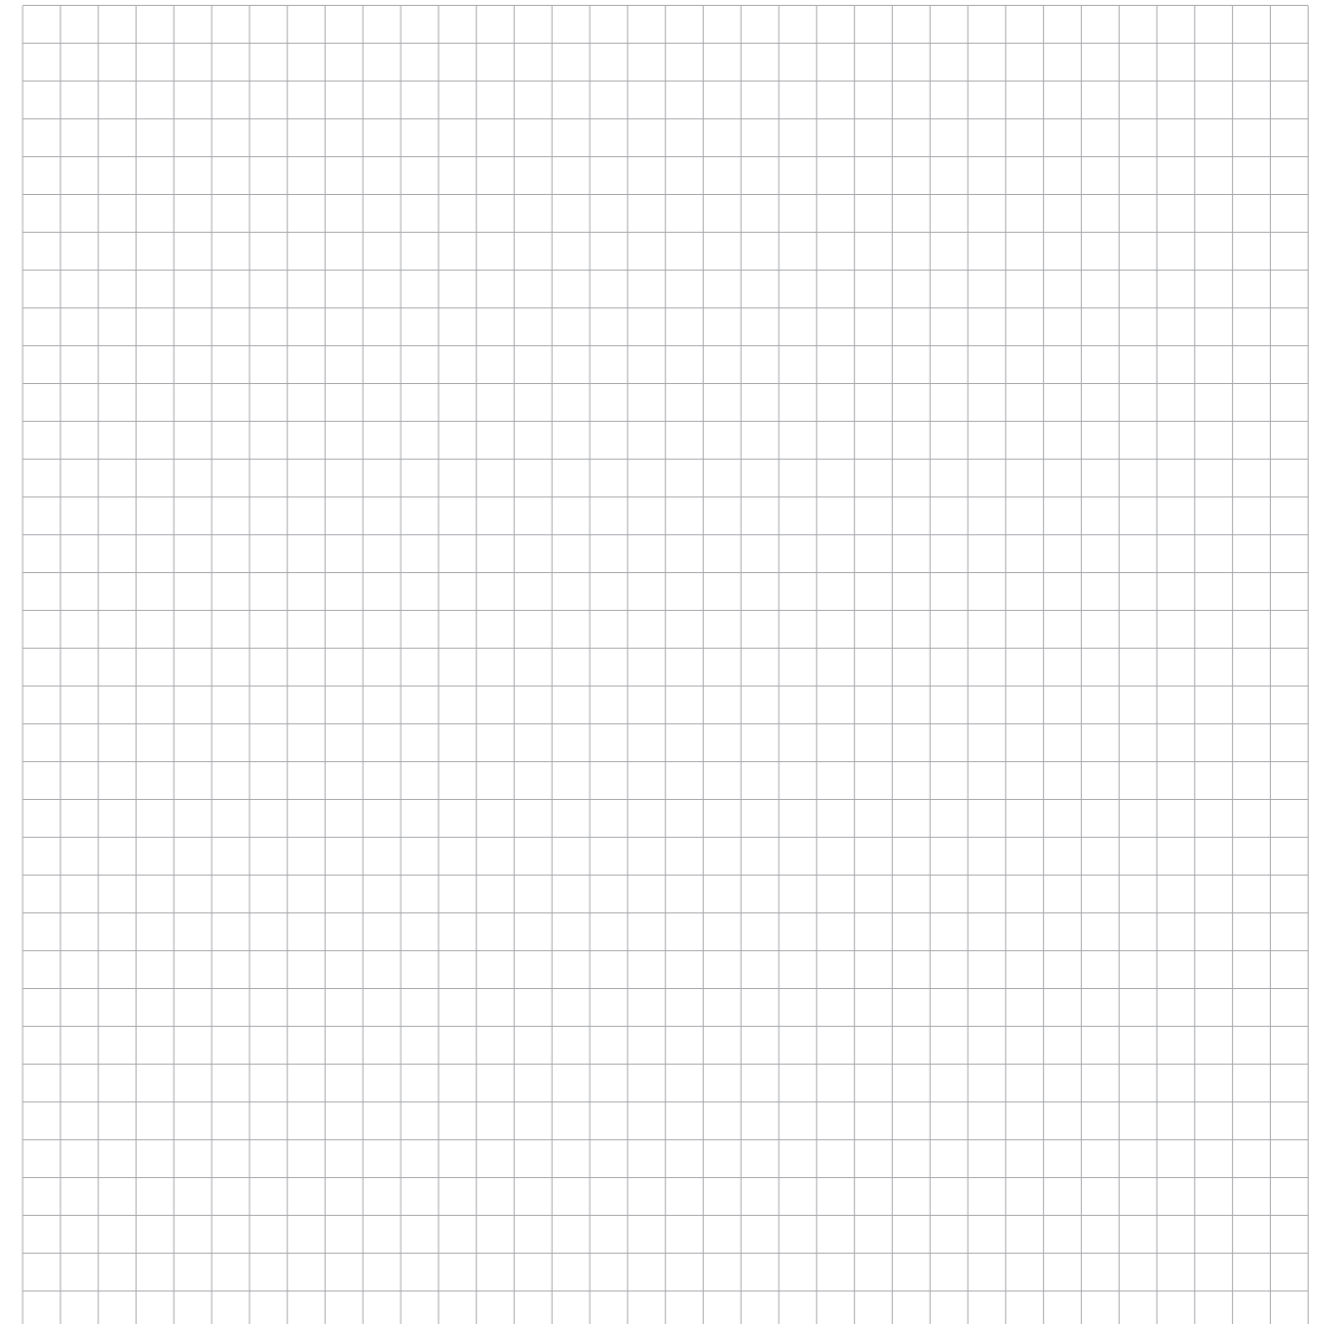


### Basic Data

Version:	1.1.3. as of 30.01.2023
Category:	Endoscope 3D measurement software exclusively for endoscope iX3D of IT Concepts GmbH, Lahnau, Germany
Languages:	English, German, Italian, Russian, Spanish
Requirements:	Operating System Windows 10   Measurement functionalities included in iX3D-Software has to be calibrated by manufacturer after/with installation of iX3D-Software
Intellectual Properties:	3D.aero GmbH, Billhorner Deich 96, D-20539 Hamburg, Germany (info@3d-aero.com)

### Software features

Live camera	Current live view for visual inspection (not in measurement mode; for visual inspection purposes only)
File management	<ul style="list-style-type: none"> <li>• Set up of / naming of / moving up/down in file folder hierarchy (main and sub folders)</li> <li>• Selection of files to be deleted</li> <li>• Selection of folder in which new images should be stored automatically after image taking</li> <li>• Images/videos stored in file manager are visible as thumbnails</li> <li>• Viewing single images in larger frame, start/stop video in larger frame</li> </ul>
Settings (permanently = until setting is changed manually)	<ul style="list-style-type: none"> <li>• Language preference (= English, German, Italian, Russian, Spanish)</li> <li>• Freeze live view after image taking</li> <li>• Set up of working folder/export folder location, file name (incl. date/time), Image/Video file name prefix/suffix</li> <li>• Image enhancement of sharpness, brightness, contrast</li> <li>• Invert colors</li> <li>• Mirror image horizontal/vertical</li> </ul>
Exposure mode	Exposure of camera (automatic/manual setting)
Inspection mode	Measurement mode (off)
Inspection camera	Capture/save/delete images taken in inspection mode (2D)
Inspection video	Start/stop video captured in measurement mode (2D)
Measurement mode	Measurement mode (on), Stereo view of cameras (on = 2 images visible/off = 1 image visible)
Measurement camera	<ul style="list-style-type: none"> <li>• Capture/save/delete images taken in measurement mode (3D)</li> <li>• Result of measurement visible right after image taking (red color for areas without measurement result)</li> </ul>
Measurement video	Start/stop video captured in measurement mode (3D)
Measurement methods	<ul style="list-style-type: none"> <li>• Point-to-point, • point-to-line, • point-to-Plane (3D), • multipoint line</li> <li>• Colored 3D point cloud as Depth map of measurement, 360° 3D view of model in image (3D; incl. different colors for each layer)</li> </ul>
Measurement result	All values in Millimeter (mm), save/delete images with/after measurement results
Marker settings (available for images only)	Support for reporting purposes (available in inspection & measurement mode): <ul style="list-style-type: none"> <li>• include/save/delete circles, squares, lines, multipoint lines, arrows in saved images</li> <li>• Include/save/delete text information in saved images</li> </ul>
File manager features	<ul style="list-style-type: none"> <li>• Storage of images/videos taken in inspection as well as in measurement mode (possible before/after measurement result and annotations are added) in               <ol style="list-style-type: none"> <li>1.) File manager in the iX3D tablet PC (included in the 3D measurement software)</li> <li>2.) Folder located in any remote company drive (requirement: both devices have to be included in the same wireless network (WLAN) at the same time)</li> </ol> </li> </ul>



### The Partnership



IT Concepts is a developer, manufacturer and OEM-partner in industrial endoscopy and imaging technologies from prototype to serial production. In cooperation with our customers we develop the optimal solution for the specific application.

3D.aero develops advanced automation solutions for production and MRO in the aviation industry. They support from the feasibility study to the development of a turnkey technological solution.

