

Remote Real-Time Monitoring Sensor for Marine Growth Without Human Intervention

Ziad MAKSSASSI^{a,e}, Ahmed GUELED^b, Benoit Parreinc, Bertrand GARNIER^d,
Franck SCHOEFS^e

^a SATT OUEST VALORISATION, Nantes

^b Laboratoire de thermique et énergie de Nantes, LTEN, UMR CNRS 6607, Université de Nantes

^c Laboratoire des sciences du numérique de Nantes, LS2N, UMR CNRS 6004, Université de Nantes

^d Centre national de la Recherche, CNRS

^e Institut de Recherche en Génie Civil et Mécanique, GeM, UMR CNRS 6183, Université de Nantes



Context and objectives

Marine Growth is The **Hidden Threat** that increases weight, hydrodynamic drag and accelerates corrosion.


These effects **reduce the reliability and life span**.

Current solutions (ROVs, divers) **lack real-time data** and are **highly limited by weather conditions**.

This project delivers a **real-time monitoring solution** that:

- **Eliminates** the need for **human intervention**,
- **Enhances safety** for personnel and assets,
- Enables **continuous data collection (density and thick.)**,
- Allows **timely intervention** to **reduce maintenance costs**,
- **Reduces CO₂ emissions** linked to inspection activities.

Natural Colonisation of mussels within 2 years

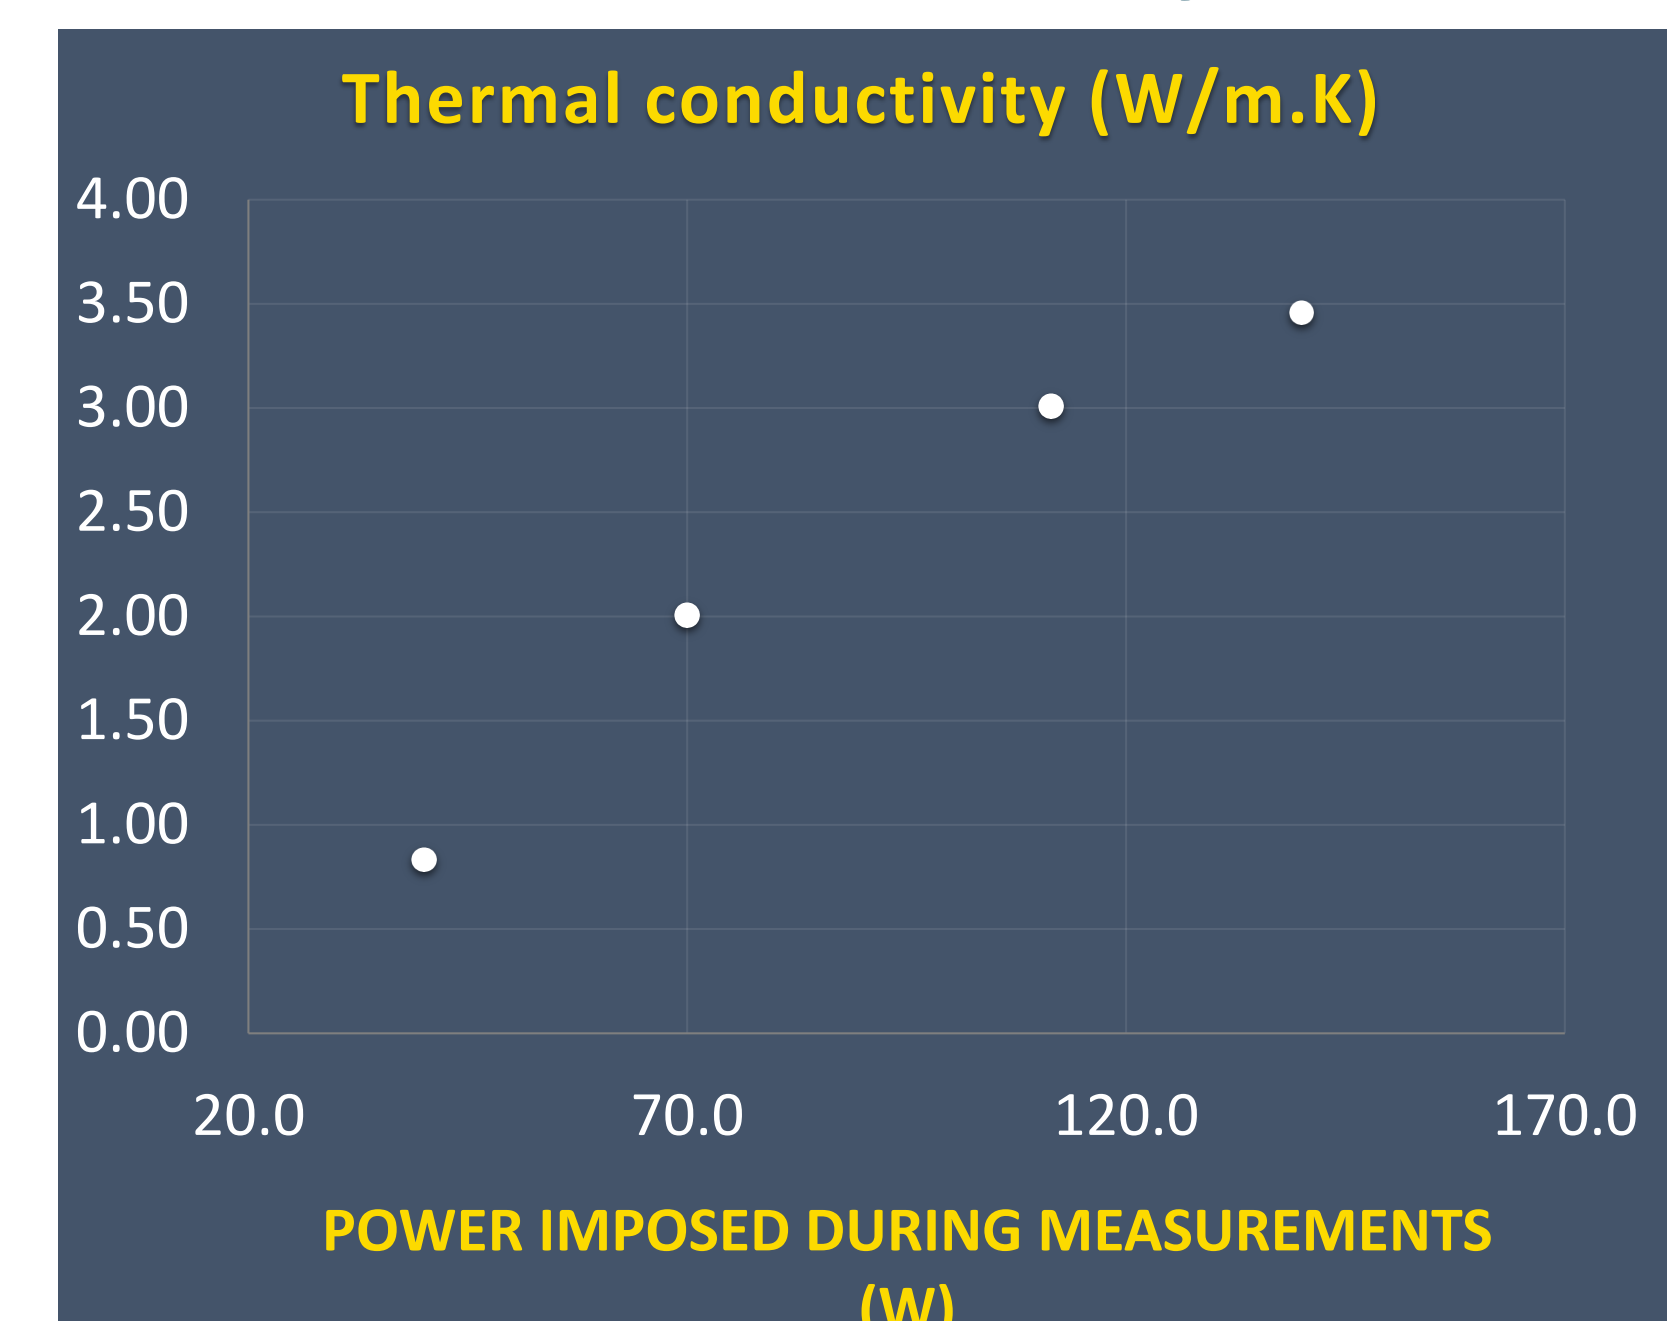

★ Patented innovative sensor: autonomous, real-time, and remotely operated



Test of the sensor in a real environment, in the sea at La Turballe West of France.



Foam insulation (to simulate mussels growth) on submarine cable



Results

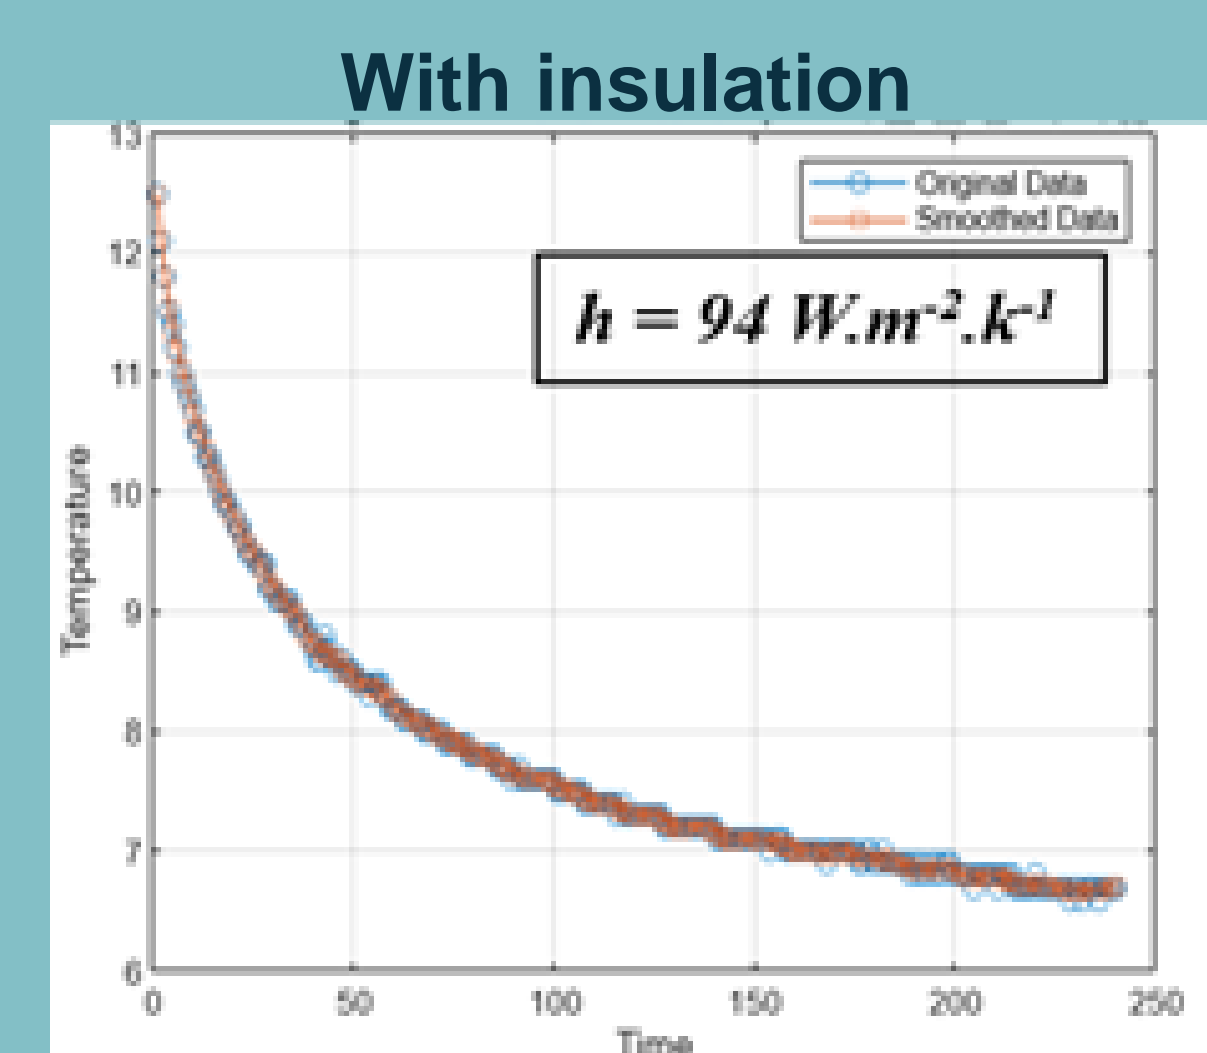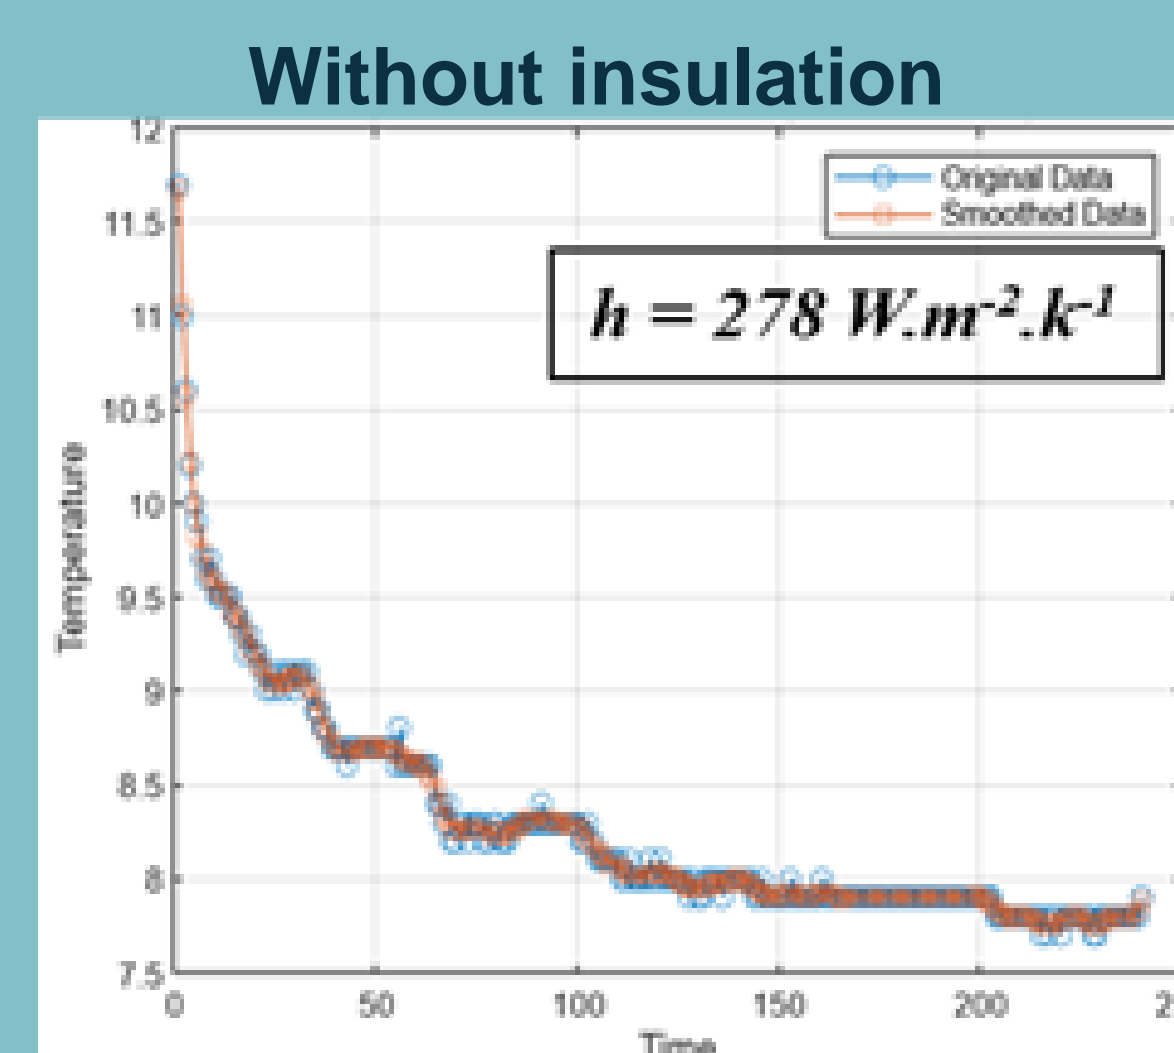

Heat transfer coefficient reduced by a factor of 3 !

Sensor tested on real Mussels



- Heat transfer coefficient reduced by a factor of 3 for with and without colonization.
- Thickness of mussels estimated is 110 mm.

Conclusion

- A patented, autonomous, real-time, and remotely operated sensor has been developed to monitor marine growth.
- Prototype tested in laboratory – Mid 2024
- Validated in real conditions – January 2025
- Technology Readiness Level (TRL): 6/9

Perspective Install the sensor on a real platform to achieve TRL 9/9