





- Versatile
- Fast: Adjustable speed from 120 to 240 slices / minute
- Easy: Intuitive touch screen
- Design: Full stainless steel or painted steel finish
- Maximum safety
- Exemplary hygiene

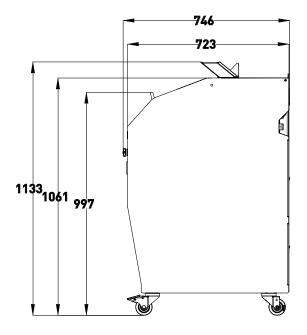

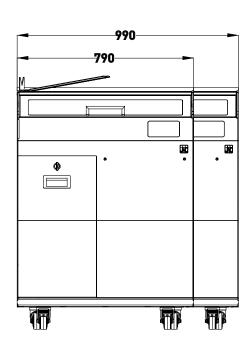

# Best-in-class slicing performances for a wide range of bread



### Smooth and quiet for all breads

- New engine generation designed for maximum precision on a wide range of breads, without lubrication
- Soft start and stop function



#### Adjustable speed up to 240 slices/ minute

In order to reach the fastest possible speed for each bread type

#### Teflon coated circular blade

Developed to cut through a large variety of breads; from soft to dense, with a hard crust, and even sticky

### Planetary blade drive

- Fluid blade movement, avoids back-and-forth shakes
- Robust solution for long-term mechanical reliability

## State-of-the-art ergonomics



#### Touch screen interface

Clear and simple interface, for an immediate and intuitive use



#### Multi-positions adjustable bagging spade Rotating spade, above cutting

- chamber, to optimize ergonomics and hygiene
- Two standard (left and right) bagging spade positions
- Or non-rotating front position (option)



## Manual grip

- For all kinds of breads, including sharp ends
- Allows to minimize last slice width



### Upper cover

- Prevents objects placed on the machine (e.g. bags) to be pushed inadvertently behind the machine when opening the front cover
- Rotates for easy cleaning



## Automatic grip (option)

Just place the bread and the machine does the rest while you continue to serve your customers



## Easy to access power switch

Accessible from the front of the machine, but not visible; avoids operations by a non-authorized person





# Safe and clean environment



#### Maximum safety

- Highest safety standards, for machine use by consumers and staff
  The blade cannot run when the
- machine is not 100% locked



#### Smooth and cleanable surfaces

- Internal architecture designed to channel bread crumbs to an easily accessible crumb tray
- Flat surfaces (without recess around)



## Anti-pinch design

Users cannot inadvertently pinch their fingers in the front cover sliders

# Make it your own

## Exterior



4 colours available as standard



Full stainless steel (structure and outer panels) (option)



Choice of any color to match your own store themes (option)

## Accessories to enhance staff and consumer experience



Clip box (option)



Front bagging stand (option)



Bag holder (option)

## **Features**

	VARIA PRO 800	VARIA PRO 1000
FEATURES		
Size of entry channel (L x W x H) in cm	38 x 34 x 16	49 x 34 x 16
Slice thickness in mm	Can be set from 4 to 30mm	Can be set from 4 to 30mm
Power supply	230V single-phase	230V single-phase
Motor power in kW	0.75	0.75
Net weight (in kg)	230	250
Cleaning position	•	•
Manual claw	•	•
Blade type and dimensions in mm	420 mm diameter, Teflon-coated	420 mm diameter, Teflon-coated
CHOICES		
Standard colour (not compatible with stainless steel exterior)*		•
OPTIONS		
Automatic claw	•	•
100% stainless steel (structure and exterior)	•	•
Special colour (not compatible with stainless steel)	•	•
Clips box	•	
Sourdough bread holder	•	•
Bag holder	•	•
Front bagger stand	•	

## \*STANDARD COLOURS







RAL 9005



RAL 9006



RAL 9010