

Duguva

Electric fencing
catalogue **2024**






DUGUVA is a Lithuanian capital company, established in 1998. Now, it is a modern dynamic company with 5000 m² of facilities and with two decades of prosperous experience in the use of high quality equipment and applying modern technologies. The high-quality products are well known and appreciated not only in Lithuania, but also in other countries. Products are successfully exported across the Europe. Our products are used in shipping and building industry, glass production, in fishery, for agriculture and gardening, in heavy and light industry, in transport, sports and tourism equipment as well as for the variety of household purposes and other applications.

We pay special attention to the quality and functionality of our products.

Polywires and polytapes are made from HDPE yarns with the wire conductive stainless steel or copper inside. The fence has a good resistance to climate changes and resistance to abrasion. We offer a wide range of colors, including a combination of colors according to customer requirements. High strength reduces the breaking of the fence.

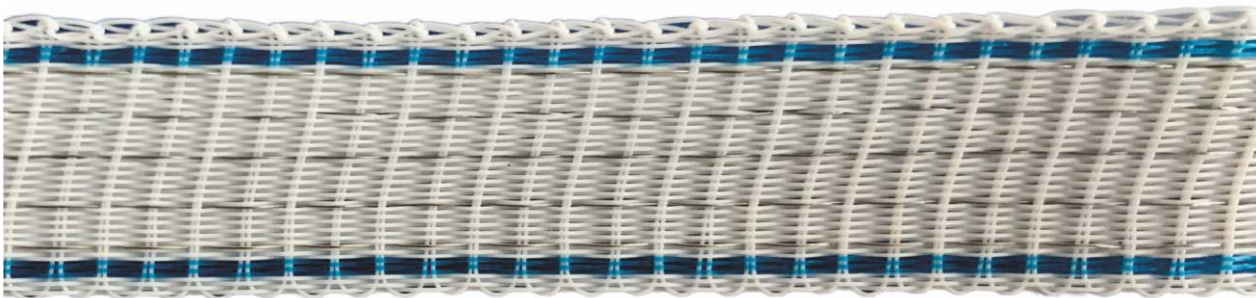

- For short fences
- 3 years UV warranty
- Very good visibility



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64104	250 m	15	3	3x0,15 mm		40 kg	150 m	
64111	500 m	15	3	3x0,15 mm		40 kg	150 m	

- For short fences
- 3 years UV warranty
- Good visibility



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
63787	250 m	11	3	3x0,16 mm		55 kg	200 m	
63794	500 m	11	3	3x0,16 mm		55 kg	200 m	
63800	1000 m	11	3	3x0,16 mm		55 kg	200 m	

- For short and medium fences
- Very good visibility
- 3 years UV warranty
- Good wires resistance



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
63817	250 m	7,8	3	3x0,20 mm		55 kg	250 m	
63824	500 m	7,8	3	3x0,20 mm		55 kg	250 m	
63268	1000 m	7,8	3	3x0,20 mm		55 kg	250 m	

- HDPE for high breaking strength
- For short and medium fences
- 3 years UV warranty
- Good wires resistance



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
62933	250 m	7,8	3	3x0.20mm		90 kg	250 m	
63244	500 m	7,8	3	3x0.20mm		90 kg	250 m	
63251	1000 m	7,8	3	3x0.20mm		90 kg	250 m	

- For medium fences
- Very good visibility
- HDPE monofilament with the highest UV protection
- Good wires resistance
- HDPE for high breaking strength



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
63299	250 m	5,5	6	6x0,16 mm		70 kg	400 m	
64012	400 m	5,5	6	6x0,16 mm		70 kg	400 m	
64210	1000 m	5,5	6	6x0,16 mm		70 kg	400 m	

- For medium fences
- Very good wires resistance
- HDPE monofilament with the highest UV protection
- HDPE for high breaking strength



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
62452	250 m	3,8	6	6x0,20 mm		95 kg	500 m	
63275	500 m	3,8	6	6x0,20 mm		95 kg	500 m	
63282	1000 m	3,8	6	6x0,20 mm		95 kg	500 m	

- For medium fences
- HDPE for high breaking strength
- 5 year UV warranty



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
65329	250 m		3,8	6	6x0,20mm		70 kg	500 m	
65330	500 m		3,8	6	6x0,20mm		70 kg	500 m	
65331	1000 m		3,8	6	6x0,20mm		70 kg	500 m	

- For medium fences
- HDPE monofilament with the highest UV protection
- Very good wires resistance
- HDPE for high breaking strength



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
65461	250 m		2,5	9	9x0,20mm		110 kg	500 m	
65462	500 m		2,5	9	9x0,20mm		110 kg	500 m	
65463	1000 m		2,5	9	9x0,20mm		110 kg	500 m	

- For very long fences
- HDPE monofilament with UV protection
- Tinned copper wires for excellent resistance
- HDPE for high breaking strength
- 5 years UV warranty



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64326	250 m	0,45	4	3x0,20 mm	1x0,25 mm	70 kg	4000 m	
64357	500 m	0,45	4	3x0,20 mm	1x0,25 mm	70 kg	4000 m	

- For very long fences
- HDPE monofilament with UV protection
- Tinned copper wires for excellent resistance
- HDPE for the highest breaking strength
- 5 years UV warranty



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64289	500 m	0,4	6	5x0,20 mm	1x0,25 mm	110 kg	4500 m	
64197	1000 m	0,4	6	5x0,20 mm	1x0,25 mm	110 kg	4500 m	

- For very long fences
- HDPE monofilament with UV protection
- Tinned copper wires for excellent resistance
- HDPE for the highest breaking strength
- 5 years UV warranty



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64322	500 m	0,20	5	3x0,20 mm	2x0,25 mm	110 kg	9500 m	
64323	1000 m	0,20	5	3x0,20 mm	2x0,25 mm	110 kg	9500 m	

- For very long fences
- HDPE monofilament with UV protection
- Tinned copper wires for excellent resistance
- HDPE for the highest breaking strength
- Very good visibility



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65335	500 m	0,12	3		3x0,25 mm	110 kg	16500 m	
64336	1000 m	0,12	3		3x0,25 mm	110 kg	16500 m	

- For very long fences
- HDPE monofilament with UV protection
- HDPE for the highest breaking strength
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64272	500 m	0,11	6	3x0,20 mm	3x0,25 mm	110 kg	18000 m	
64265	1000 m	0,11	6	3x0,20 mm	3x0,25 mm	110 kg	18000 m	

- For very long fences
- Very good visibility for wild animals
- HDPE monofilament with UV protection
- HDPE for the highest breaking strength
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Resistance Ω/m	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64951	500 m	0,11	3x0,20 mm	3x0,25 mm	110 kg	18000 m	
64968	1000 m	0,11	3x0,20 mm	3x0,25 mm	110 kg	18000 m	

- For very long fences
- HDPE monofilament with UV protection
- HDPE for the highest breaking strength
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65325	500 m	0,10	11	8x0,20 mm	3x0,25 mm	120 kg	16300 m	
65326	1000 m	0,10	11	8x0,20 mm	3x0,25 mm	120 kg	16300 m	

- For long fences
- HDPE for high level of UV protection
- Zinc wires for very good resistance
- Very good resistance
- High breaking strength



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
64906	200 m	0,31	6		6x0,30 mm	100 kg	8000 m	
64913	400 m	0,31	6		6x0,30 mm	100 kg	8000 m	

- For long fences
- High level of UV protection
- Very good resistance
- High breaking strength
- Zinc wires for very good resistance



Ref. No.	Lenght	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
66405	200 m	0,21	9		9x0,30 mm	100 kg	9500 m	
66406	400 m	0,21	9		9x0,30 mm	100 kg	9500 m	


Polytapes with stainless steel wires

- For short fences
- HDPE for the high breaking strength
- HDPE monofilament with the highest UV protection



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copperwires tinned	Breaking strength	Recommended fence length max.	Price
63862	200 m	10 mm	11	3	3x0,16 mm		70 kg	200 m	
63863 orange	200 m	10 mm	11	3	3x0,16 mm		70 kg	200 m	

- HDPE for the highest breaking strength
- For long fences
- HDPE monofilament with the highest UV protection

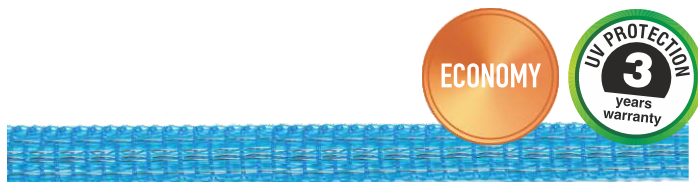

Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copperwires tinned	Breaking strength	Recommended fence length max.	Price
65367	200 m	10 mm	2,0	2	5x0,30 mm		85 kg	1100 m	
63275	500 m	10 mm	2,0	2	5x0,30 mm		85 kg	1100 m	

- For short and medium fences
- High breaking strength
- 3 years UV warranty




Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copperwires tinned	Breaking strength	Recommended fence length max.	Price
63831	200 m	20 mm	9,0	4	4x0,16 mm		90 kg	250 m	
63832 orange	200 m	20 mm	9,0	4	4x0,16 mm		90 kg	250 m	

- For short and medium fences
- 3 years UV warranty
- High breaking strength



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copperwires tinned	Breaking strength	Recommended fence length max.	Price
64203	200 m	40 mm	3,8	8	8x0,16mm		120 kg	400 m	
64204 orange	200 m	40 mm	3,8	8	8x0,16mm		120 kg	400 m	

- For long fences
- High breaking strength
- Very good UV protection
- Especially good in winter time
- 5 year UV warranty

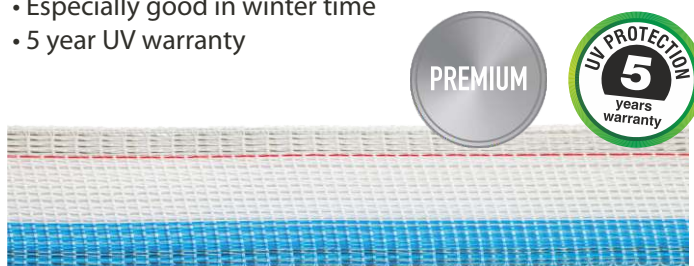

Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
653271	200 m	40 mm	0,8	8	8x0,40mm		300 kg	15000 m	


Polywires with tinned copper wires

- HDPE for the highest breaking strenght
- HDPE monofilament with the highest UV protection
- Tinned copper wires for excellent resistance
- For long fences



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65371	200 m	12 mm	0,37	5	4x0,15 mm	1x0,25 mm	85 kg	6700 m	
65372	500 m	12 mm	0,37	5	4x0,15 mm	1x0,25 mm	85 kg	6700 m	

- HDPE for the highest breaking strenght
- HDPE monofilament with the highest UV protection
- Tinned copper wires for excellent resistance
- For very long fences

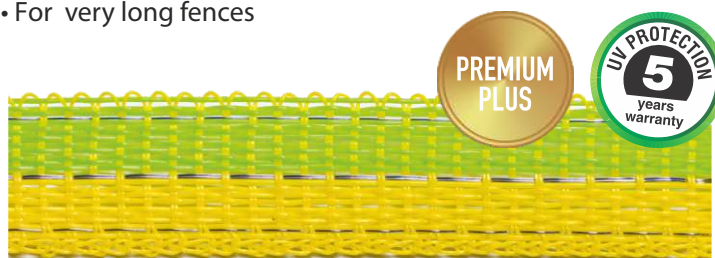

Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65373	200 m	12 mm	0,27	4	2x0,20 mm	2x0,20 mm	85 kg	9000 m	
65374	500 m	12 mm	0,27	4	2x0,20 mm	2x0,20 mm	85 kg	9000 m	

- HDPE for the highest breaking strenght
- For very long fences
- HDPE monofilament with the highest UV protection
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65375	200 m	12,5 mm	0,21	5	1x0,20 mm 2x0,16 mm	2x0,25 mm	85 kg	115000 m	
65376	500 m	12,5 mm	0,21	5	1x0,20 mm 2x0,16 mm	2x0,25 mm	85 kg	115000 m	

- For long and very long fences
- HDPE monofilament with the highest UV protection
- Tinned copper wires for excellent resistance
- Good visibility



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64333	200 m	20 mm	0,18	5	3x0,20 mm	2x0,25 mm	200 kg	1000 m	
64364	500 m	20 mm	0,18	5	3x0,20 mm	2x0,25 mm	200 kg	1000 m	

- HDPE for the highest breaking strenght
- For very long fences
- HDPE monofilament with the highest UV protection
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65390	200 m	20 mm	0,18	5	3x0,20 mm	2x0,25 mm	120 kg	11000 m	
65391	500 m	20 mm	0,18	5	3x0,20 mm	2x0,25 mm	120 kg	11000 m	

- For very long fences
- High breaking strength
- HDPE monofilament with the highest UV protection
- HDPE with the highest breaking strength



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64340	200 m	40 mm	0,11	6	3x0,20 mm	3x0,25 mm	210 kg	18000 m	
64371	500 m	40 mm	0,11	6	3x0,20 mm	3x0,25 mm	210 kg	18000 m	

- For very long fences
- High breaking strength
- HDPE monofilament with the highest UV protection



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65340	200 m	40 mm	0,15	12	10x0,20 mm	2x0,25 mm	290 kg	10000 m	

Polytapes with zinc wires

- HDPE for the highest breaking strength
- For long fences
- HDPE monofilament with the highest UV protection
- Zinc wires for excellent resistance



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
65369	200 m	10 mm	0.38	5		5x0,30 mm	85 kg	6500 m	
65370	500 m	10 mm	0.38	5		5x0,30 mm	85 kg	6500 m	

- HDPE for the highest breaking strength
- For long fences
- HDPE monofilament with the highest UV protection
- Zinc wires for excellent resistance



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
65377	200 m	20 mm	0,19	6		6x0,30 mm	120 kg	10000 m	
65378	500 m	20 mm	0,19	6		6x0,30 mm	120 kg	10000 m	

Polyropes

- For short fences
- 3 years UV warranty
- Very high breaking strength



Ref. No.	Lenght	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
64821	200 m	6 mm	3,8	6	6x0,20 mm		590 kg	500 m	
66390	500 m	6 mm	3,8	6	6x0,20 mm		590 kg	500 m	

- For short fences
- 3 years UV warranty
- Very high breaking strength



Price	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.
	200 m	5 mm	9	3	3x0,20 mm		430 kg	250 m
	500 m	5 mm	9	3	3x0,20 mm		430 kg	250 m

- For long fences
- 3 years UV warranty
- Very high breaking strength



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64838	200 m	8 mm	1,2	6	6x0,40 mm		1200 kg	2000 m	
62728	500 m	8 mm	1,2	6	6x0,40 mm		1200 kg	2000 m	

- For long fences
- 3 years UV warranty
- Very high breaking strength



Price	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.
66391	200 m	6 mm	2,3	3	3x0,40 mm		590 kg	1000 m
66392	500 m	6 mm	2,3	3	3x0,40 mm		590 kg	1000 m

- For long fences
- 3 years UV warranty
- High breaking strength



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
64883	200 m	5 mm	2,3	3	3x0,40 mm		450 kg	1000 m	
66393	500 m	5 mm	2,3	3	3x0,40 mm		450 kg	1000 m	

- For very long fences
- 3 years UV warranty
- Very high breaking strength
- Zinc wires for excellent resistance



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
66394	200 m	6 mm	0,31	6		6x0,30 mm	590 kg	8000 m	
66395	500 m	6 mm	0,31	6		6x0,30 mm	590 kg	8000 m	

- For very long fences up to 10 000m
- Very high breaking strength
- Zinc wires for excellent resistance



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Zinc wires	Breaking strength	Recommended fence length max.	Price
65337	400 m	4 mm	0,31	6		6x0,30mm	330 kg	8000 m	

- For very long fences
- 3 years UV warranty
- Very high breaking strength
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65355	200 m	5 mm	0,11	6	3x0,20 mm	3x0,25 mm	450 kg	18000 m	
65356	500 m	5 mm	0,11	6	3x0,20 mm	3x0,25 mm	450 kg	18000 m	

- For short and medium fences
- Very high breaking strength
- 5 years warranty



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
66398	200 m	6 mm	3,8	6	6x0,20 mm		400 kg	500 m	
66399	500 m	6 mm	3,8	6	6x0,20 mm		400 kg	500 m	

- For very long fences
- Very high breaking strength
- Tinned copper wires for excellent resistance



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
66400	200 m	6 mm	0,4	6	5x0,20 mm	1x0,25 mm	400 kg	4500 m	
66401	500 m	6 mm	0,4	6	5x0,20 mm	1x0,25 mm	400 kg	4500 m	

Braided Polywires

- Braided construction
- Durable design with a reinforced structure increase lifespan of electric fence
- For very long fences
- High breaking strenghte



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65361	200 m	3 mm	0,11	9	6x0,16 mm	3x0,25 mm	120 kg	18000 m	
65362	500 m	3 mm	0,11		6x0,16 mm	3x0,25 mm	120 kg	18000 m	
65363	1000 m	3 mm	0,11	9	6x0,16 mm	3x0,25 mm	120 kg	18000 m	

- Braided construction
- Durable design with a reinforced structure increase lifespan of electric fence



Ref. No.	Lenght	Diameter	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
65364	200 m	3 mm	3,8	9	6x0,20 mm		120 kg	18000 m	
65365	500 m	3 mm	3,8	9	6x0,20 mm		120 kg	18000 m	
65366	1000 m	3 mm	3,8	9	6x0,20 mm		120 kg	18000 m	

Recycled fishnets, trawls and ropes can be converted into new high-grade raw materials and used to make new durable polywires and polytapes.

Polywires with copper wires tinned

- Made from recycled fishing nets
- For very long fences
- 5 years UV warranty
- Green color blends in natural surroundings




Ref. No.	Length	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
	500 m	0,11	6	3x0,20 mm	3x0,25 mm	110 kg	18000 m	
	1000 m	0,11	6	3x0,20 mm	3x0,25 mm	110 kg	18000 m	

Polytape with copper wires tinned


- Made from recycled fishing nets
- For very long fences
- 5 years UV warranty
- Green color blends in natural surroundings



Ref. No.	Length	Width	Resistance Ω/m	Number of conductors	Stainless steel wires	Copper wires tinned	Breaking strength	Recommended fence length max.	Price
	200 m	40mm	0,11	6	3x0,20 mm	3x0,25mm	140kg	18000 m	

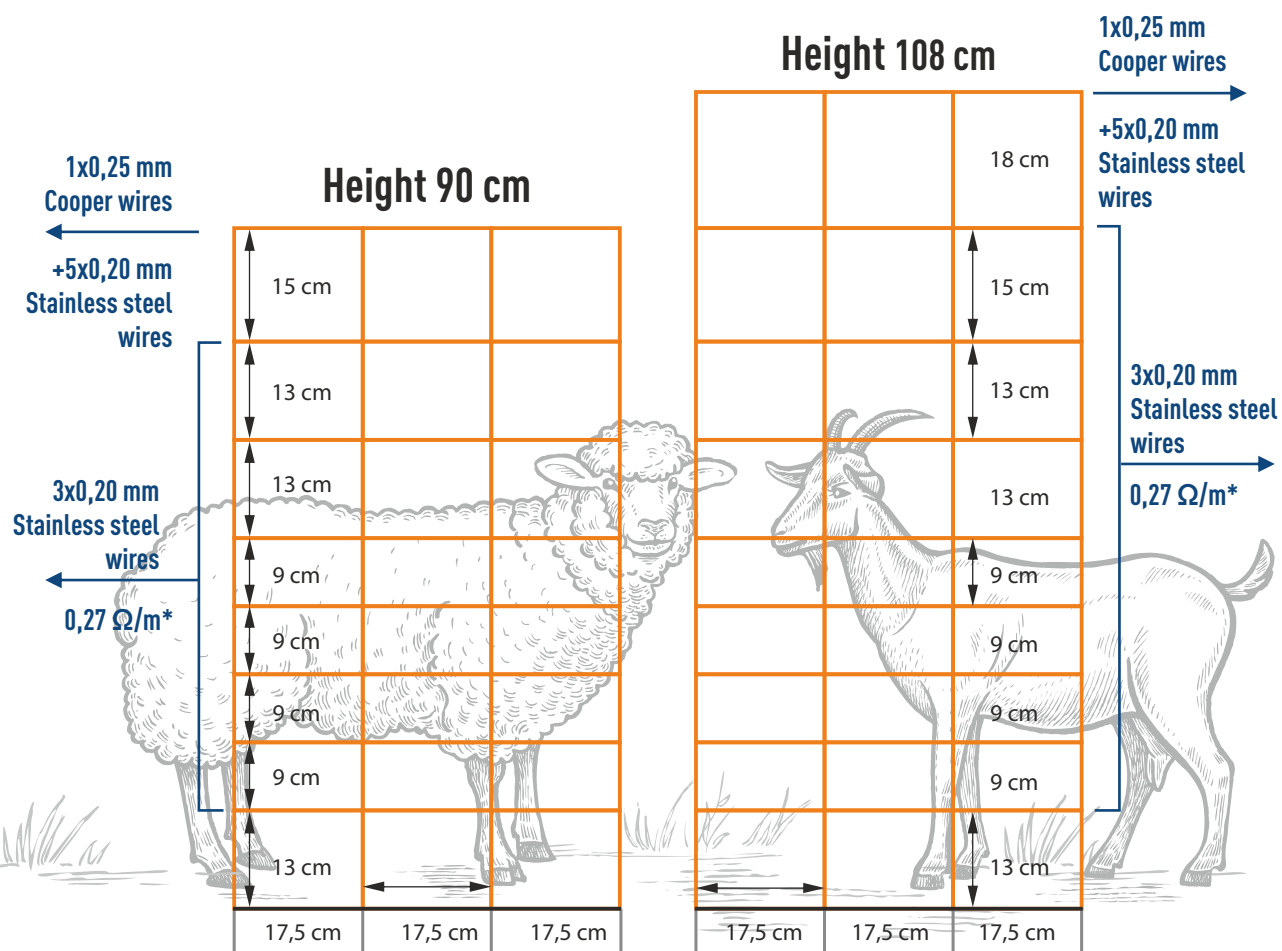

Ref. No.	Diameter	Lenght	Height	Colour	Qty posts
89742	Double spike	50 m	90 cm	Orange	14
89743	Double spike	50 m	108 cm	Orange	14

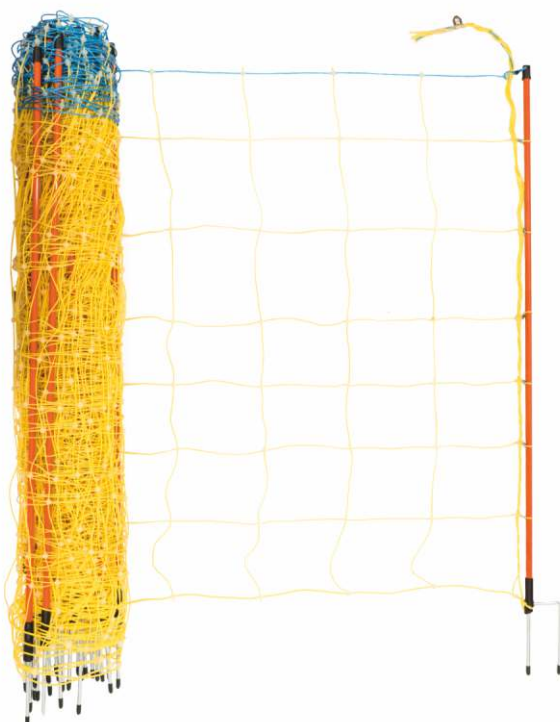



Ref. No.	Diameter	Weight kg/100m	Breaking strength kg
89352	8 mm	3,6	6000
89353	10 mm	5	10 000
89354	12 mm	8	14 000
89355	14 mm	10	18 000

Rubber electric rope

- Rubber electric rope for fence gate
- UV resistant
- Very good visibility

Ref. No.	Lenght	Diameter	Stainless steel wires
67390	50 m	7 mm	3x0,15mm



Custom production

Duguva offers a possibility to produce custom fences based on the following specifications:

Construction:

Braided



Twisted



Woven



Wire materials:

Stainless Steel Wire	Tinned Copper Wire	Zinc Wire	Aluminium Wire
0.15mm 0.16mm 0.20mm 0.40mm	0.20mm 0.25mm 0.30mm	0.30mm	0.25mm 0.30mm

Monofilaments:

HDPE Yarns
0.30mm 0.38mm

Fence Colors:



White



Yellow



Orange



Red



Green



Blue



Black

UV Protection:



Other products



The braided ropes are produced in the diameter of 1mm to 30mm. The cords could be 8, 12, 16 or 24, 36 strands, with or without core. The braided ropes are made of various types of yarns such as Nylon, Polyester, Polypropylene, Polyethylene, Cotton, Jute, Flax and Sisal as well as of modern high tech yarns such as Aramid and HMPE.



Twisted ropes. UAB Duguva produces 3-strands from 2mm to 30mm. Twisted ropes are made of various types of yarns such as Nylon, Polyester, Polypropylene, Polyethylene, Cotton, Jute, Flax and Sisal.



Webbing is a strong fabric woven as a flat strip or tube of varying width often used in place of rope. It is made from synthetic fibers such as nylon, polypropylene multifilament or polyester or natural- linen and cotton. Each of them is produced in a variety colours and breadth ranging from 5mm to 60mm. Webbing is both light and strong, with high breaking strengths, good UV and abrasion resistance. Our production includes both elastic and non-elastic constructions.



Elastic cords. UAB Duguva produces elastic cords from 2mm to 12mm, 16 or 24-strands cover is made from 100% high tenacity polyester, nylon or polypropylene multifilament yarns and parallel rubber core inside. It is widely used for a tents fastening.



Synthetic, mixed synthetic and natural fibers twines are used in meat processing industry, agriculture, fishing and gardening.



Dyneema Ropes. Dyneema® is the world's strongest fiber. A rope with Dyneema® is up to 7 times stronger than steel wire rope at the same weight. UAB Duguva produce Dyneema ropes from 2mm to 30mm.



Contacts:

"Duguva"

K. Donelaicio st. 16, LT-42163 Rokiskis, Lithuania

Phone/fax: + 370 458 32000

E-mail: sales@duguva.lt

www.duguva.lt