



SWEEPING-CLEANING



EMILY - ZA Les Landes - 29800 Tréflévénez - France
T. +33 (0)2 98 21 86 12 / F. +33 (0)2 98 21 86 14
export@emily.fr

www.emily.fr



MULTI'SWEEP

HOW IT WORKS

- The Multi'Sweep sweeper fits onto the rear linkage of tractor.
- The collecting box is optional on the angled brush.
- The sweeper is designed for making swath right or left or sweep / collect (center position). It sweeps and collects any type of waste (outdoor cleaning).
- 1 or 2 side brushes are available (only when collecting).
- Works with 1 double acting spool.



EMILY ADVANTAGES

- ➔ Versatile sweeper: 2 functions in 1: angled brush or collect.
- ➔ Guaranteed sturdiness thanks to its heavy load wheels.
- ➔ 300L collecting box. Easy drive system to control the opening / closing of the collecting box from the cab.
- ➔ The water tank is integrated into the hitching frame: unique on the market.



WIDTH	2,20 m	2,50 m
OVERALL WIDTH	2,55 m	2,85 m
EMPTY WEIGHT*	600 kg	680 kg
WHEELS	2 multidirectional wheels, Ø 300 mm, special for heavy loads (3rd wheel with the collecting box)	
ORIENTATION	Manual or hydraulic orientation +/- 30°	
COLLECTING BOX CAPACITY**	308 L	350 L



EASY'CLEAN

HOW IT WORKS

- The Easy Clean Sweeper fits onto any type of machinery handler. High density and floating brush Ø 600mm.
- Mechanical high capacity collecting box. Backward rotation of the brush. Structure with 4 cast-iron wheels (OR 2 iron rear multidirectional wheels for sweepers from 1,80m width). Works with a double acting spool

EMILY ADVANTAGES

- ➔ Ideal to sweep works sites
- ➔ Backward rotation of the brush for high quality sweeping and optimized filling of the collecting box
- ➔ Economical solution



WIDTH	1,50 m	1,80 m	2,10 m	2,40 m
OVERALL WIDTH	1,85 m	2,15 m	2,45 m	2,75 m
COLLECTING BOX CAPACITY***	375 L	450 L	525 L	600 L
EMPTY WEIGHT*	560 kg	620 kg	655 kg	692 kg

*The weight is not contractual. ** Fill rate 70% *** Fill rate 60 %

AÉRO'SWEEP



HOW IT WORKS

- On pallet forks or front rear linkage of tractor.
- The Aero'Sweep is an angled brush sweeper with a distinctive feature: the sweeper has no wheels. It is thus an economical sweeper with a long life cycle. A hydraulic control ensures a perfect adjustment on uneven ground.
- By setting the joystick in one direction the brush moves down meantime the brush rotates. The brush stabilises itself in contact with the ground to get a constant sweeping pressure thus ensuring a perfect sweeping on uneven ground. The brush is self adjusted when it wears out and thus requires no action from the operator.
- On the other direction, the brush lifts up enabling a safe handling.
- Works with 1 double acting spool.



EMILY ADVANTAGES

- No wheels: exclusive and economical.
- ABS System (Patented): perfect adaptation on uneven ground. The ABS System can balance an important high amplitude.
- Level mark: the driver controls the brush position from the cab.
- Fully integrated hoses: optimal protection for the driver and the machine.

BRUSH WIDTH	1,80 m	2,20 m	2,50 m	2,80 m
SWEEPING WIDTH	1,80 m	2,20 m	2,50 m	2,80 m
OVERALL WIDTH	2,20 m	2,60 m	2,90 m	3,20 m
SWEEPING WIDTH	1,65 m	2,05 m	2,35 m	2,65 m
OVERALL WIDTH	2,05 m	2,45 m	2,75 m	3,05 m
WEIGHT*	420 kg	460 kg	500 kg	530 kg




MODULO'SWEEP

NEW

- The Modulo'Sweep fits onto any machinery handlers with pallet forks. It moves bulk volumes of waste and dirt.

OPTION

- Extension main Brush 50 cm
- Side retainers
- Forks stops

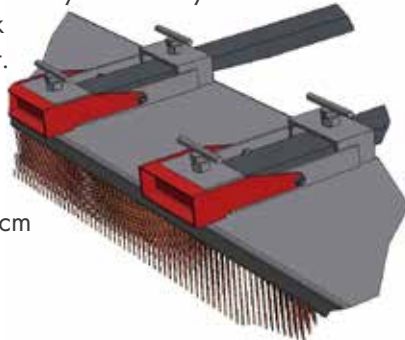

WIDTH	1,50 m	2,00 m	2,50 m	3,00 m
NUMBER OF BRUSH PARTS	3	4	5	6
WIDTH WITH SIDE RETAINERS	1,80 m	2,30 m	2,80 m	3,30 m

EMILY ADVANTAGES

- Removable brush parts within 1 minute. Brush is symmetric and reversible (ideal to optimize the lifetime of the brush).
- Fits onto the Pick & Go bale fork carrier and any machinery handler with pallet forks.



*The weight is not contractual.

PRO'SWEEP



HOW IT WORKS

- The Pro'Sweep fits onto any wheel loaders, telehandlers or front linkage of tractor. The sweeper is equipped with a hydraulic motor inside the main brush.
- Exclusive ABS System (Activ'Bross System). Patented hydraulic system for automatic brush adjustment on uneven floors.
- The orientation is manual or hydraulic (optional).

EMILY ADVANTAGES

- Exclusivity: ABS System.
 - Hydraulic system for an automatic brush adjustment on uneven ground.
- Sturdiness: ideal for intensive usage.
- Exclusive scraping blade with hydraulic positioning (not available with the collecting box).
- Collecting box with Easydrive (a third wheel is supplied with the collecting box).

BRUSH WIDTH	2,20 m	2,50 m	2,80 m
OVERALL WIDTH	2,57 m	2,87 m	3,17 m
WHEELS	2 inflatable wheels Ø 420mm		
BRUSH DIAMETER	High density Ø 600mm brush with interchangeable rings		
WEIGHT*	650 kg	750 kg	850 kg
ORIENTATION	Manual or hydraulic orientation +/-30°		



ZOOM IN ON...



Sprinkling equipment available (optional)



ABS

NEW



Hydraulic scraping blade:
3 sections on 2.50m sweeper,
2 sections on 2.20m sweeper




With floating design
Fits to 3rd point of tractor

*The weight is not contractual.

MASTER'CLEAN

HOW IT WORKS

- The sweeper bucket is equipped with a hydraulic motor in the main brush. The brush adjustment is done by indexing (automatic brush adjustment optional).

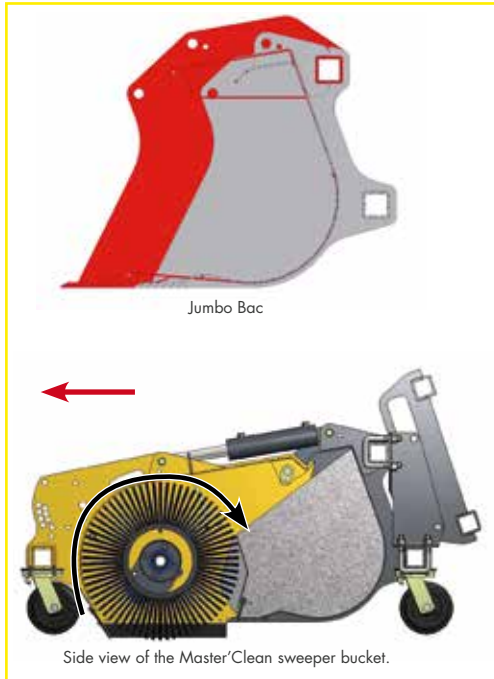

EMILY ADVANTAGES



- ➔ Sweep and collect in only one passage.
- ➔ Cleaning up to 2500 m² in 10 minutes !
- ➔ For a safe and clean working site.
- ➔ Exclusivity: ABS System.
 - Patented hydraulic system for automatic brush adjustment on uneven floors (optional).

BRUSH WIDTH	1,60 m	2,00 m	2,20 m	2,50 m	2,80 m
OVERALL WIDTH	1,83 m	2,23 m	2,43 m	2,73 m	3,03 m
COLLECTING BOX CAPACITY*	425 L	525 L	575 L	650 L	725 L
JUMBO COLLECTOR FOR LIGHT MATERIALS (OPTION)**	595 L	735 L	805 L	910 L	1 015 L
EMPTY WEIGHT***	640 kg	800 kg	900 kg	1 000 kg	1 120 kg



ZOOM IN ON...

Polypropylene and steel side brush adjustable, folding and orientable with a 3-way valve



4 multidirectional wheels, Ø 200 mm, width 80mm (special for heavy loads)



* Fill rate 95% ** Large capacity collector for light materials < 0,5m³ *** The weight is not contactual

SWEEPING MODULE

HOW IT WORKS

STANDARD

- Light and easy to fit with 2 pin lockings, it fits onto the user's original bucket or to any new one.
- Positioning legs on each side enable the adjustment of the brush to the height of the bucket.
- A standard adaptation kit is supplied to weld on the bucket.



EMILY ADVANTAGES

- ➔ The bucket easily turns into a sweeper.
- ➔ Fast: it fits/unfits to any bucket of the market in 2 minutes.
- ➔ For any type of site: farm yard, clamp site, warehouse...
- ➔ Economical



OPTION

- Galvanization
- Additional kit to weld on another bucket.

BRUSH WIDTH	1,80 m	2,00 m	2,20 m	2,40 m
BUCKET WIDTH	From 1,88 to 2,08 m	From 2,08 to 2,28 m	From 2,28 to 2,48 m	From 2,48 m
EMPTY WEIGHT*	260 kg	285 kg	300 kg	320 kg

COMPACT

BRUSH WIDTH	1,30 m	1,50 m	1,70 m
BUCKET WIDTH	From 1,40 to 1,60 m	From 1,60 to 1,80 m	From 1,80 to 2,00 m
EMPTY WEIGHT*	100 kg	110 kg	120 kg



AGRI'CLEAN

HOW IT WORKS

- Reliable and sturdy, easy friendly: the Agri'Clean sweeper fits onto the tractor in 30 seconds.
- It sweeps any type of flat site and collects gravels, dust... The steel side brush can also be used for weeding (preventive weeding).



EMILY ADVANTAGES

- ➔ Fits onto agricultural tractors, front and rear linkage, front loaders, compact loaders.
- ➔ Ideal for roads cleaning.



Side view of the Agri'Clean

BRUSH WIDTH	1,30 m	1,60 m	2,00 m	2,20 m
OVERALL WIDTH	1,57 m	1,87 m	2,27 m	2,47 m
COLLECTING BOX CAPACITY**	163 L	200 L	250 L	275 L
WATER TANK CAPACITY	100 L or 2 x 100 L			
EMPTY WEIGHT*	580 kg	600 kg	650 kg	670 kg



* The weight is not contractual. ** Fill rate 70%

CORNER'SWEEP

HOW IT WORKS

- It fits onto any machinery handlers: tractors (front loader, front/rear linkage), telescopic handlers, forks sleeves.
- Lateral offset adjustment by a manual retractable stop.
- Retraction by a safety bolt and central locking for the transport.



MATERIAL	100 % polyester OR mixed polyester and steel brush	
BRUSH DIAMETER	900 mm	1 200 mm

EMILY ADVANTAGES

- Ideal for cleaning the cow cubicles, poultry houses...
- Perfectly adapted to uneven ground.
- Cleans any site even with a difficult access.
- Turn from right to left by simple inversion of the brush rotation.



PICK'SWEEP

HOW IT WORKS

- Suitable on any bale fork carrier on the market
- Large diameter brush Ø: 900, 1 200, 1 500 or 1 800 mm
- Half integrated motor • Brush inclinaison with 4 positions every 6° • Reversible : right and left



EMILY ADVANTAGES

- Ideal to sweep chicken houses (sweeping along walls to make swathes)
- Suitable on any bale fork carrier on the market
- Economical and heavy duty

SIDE'SWEEP

HOW IT WORKS

- Adaptable sur mini chargeuse, chargeur frontal, télescopique • Interfacing chassis with square tubes
- Semi-integrated motor • Arm cylinder • Rubber pad with stops

EMILY ADVANTAGES

- The Side Sweep fits onto compact loader, front and telescopic loader
- Ideal to sweep the back of cubicles. Hydraulically lifted brush (retraction before walls and posts)



MATERIAL	100 % polyester OR mixed polyester and steel brush	
BRUSH DIAMETER	900 mm	1 200 mm

MICRO'CLEAN - MICRO'SWEEP

HOW IT WORKS

- The Micro'Clean collects any type of waste.
- The Micro'Sweep makes swathes (collecting box open) and collects any type of waste (collecting box closed). Swathing to the right or to the left hand side with mechanical orientation (+/-30°)

EMILY ADVANTAGES

- Collects any type of waste.



BRUSH WIDTH	1,30 m	1,60 m
OVERALL WIDTH	1,70 m	2,00 m
EMPTY WEIGHT*	245 kg	275 kg
MICRO'SWEEP	235 kg	265 kg
MICRO'CLEAN FRONT	290 kg	320 kg
MICRO'CLEAN REAR		
COLLECTING BOX CAPACITY (OPTION)**	152 L	188 L
SIDE BRUSH	1 or 2 side brush(es)	
WATER SYSTEM	Water system with a 200L water tank (additional tank)	

* The weight is not contactual ** Fill rate 70%

HYDRAULIC PRESSURE WASHER

HOW IT WORKS

- This high pressure cleaner works without a water inlet and without electric connection. It works with the hydraulic of the machinery handler.
- It fits onto rear 3rd pt of tractor and on pallet forks.

OPTION

- Rotative nozzle to scrape off.
- Hose retractor.
- Unplug conduits.
- Pump spray for flower boxes.

TANK CAPACITY	450 L	600 L
WEIGHT WHEN EMPTY*	120 kg	240 kg
WEIGHT WHEN FULL	570 kg	840 kg
DEPTH	0,80 m	1,10 m
WIDTH	1,10 m	1,45 m
HEIGHT INCLUDING RETRACTOR	1,30 m	1,50 m

EMILY ADVANTAGES

- ➔ Flow: 900 L/h.
- ➔ Pressure 200 bars.
- ➔ Autonomy: it cleans areas where access is difficult.



TECHNICAL SPECIFICATIONS

	Telehandler	Front loader	Rear / front linkage	Diesel forklift	Wheel loader	Digger	Compact tractor	Compact skid	Minimum oil flow (L/min)	Required pressure
MULTI'SWEEP	-	-	rear	-	-	-	-	-	30	180
EASY'CLEAN	•	•	rear	•	•	-	-	•	35	120
SWEEPING MODULE	•	•	-	-	•	•	•	•	30	180
PRO'SWEEP	•	-	Front	-	•	•	-	-	30	180
MASTER'CLEAN	•	•	•	•	•	•	-	> 80 HP	50	180
MICRO'SWEEP	-	-	•	-	-	-	30 to 50 HP	< 60 HP	20	180
MICRO'CLEAN	-	-	-	-	-	-	30 to 50 HP	< 60 HP	20	180
AGRI'CLEAN	•	•	•	-	-	-	-	60 to 80 HP	20	180
AERO'SWEEP	•	•	•	-	•	•	-	-	30	180
MODULO'SWEEP	•	•	•	•	•	•	•	•	-	-
HYDRAULIC PRESSURE WASHER	•	•	•	•	•	•	•	•	30	180
CORNER SWEEP	•	•	•	•	-	•	•	•	30	180
SIDE'SWEEP	•	•	-	•	-	•	-	•	30	180

AVAILABLE EQUIPMENTS AND OPTIONS

	Angled brush	Collecting box	Water system	1 or 2 side brushes*
MULTI'SWEEP	•	•	180 L	•
EASY'CLEAN	-	•	100 L	•
SWEEPING MODULE	-	bucket	-	-
PRO'SWEEP	•	-	200 L	•
MASTER'CLEAN	-	•	200 L	•
MICRO'SWEEP	•	•	100 or 200 L	•
MICRO'CLEAN	-	•	100 or 200 L	•
AGRI'CLEAN	-	•	100 or 200 L	•
AERO'SWEEP	•	-	-	-
MODULO'SWEEP	•	-	-	-
HYDRAULIC PRESSURE WASHER	-	-	450 or 600 L	-
CORNER 'SWEEP	•	-	-	-
SIDE'SWEEP	•	-	-	-
PICK'SWEEP	•	-	-	-

* Sweeping brush with 1 side brush + 23 cm.

EMILY - ZA Les Landes - 29800 Tréflévénez - France
T. +33 (0)2 98 21 86 12 / F. +33 (0)2 98 21 86 14
export@emily.fr

www.emily.fr

