

SAFE FARM

★★★★
**Product
Catalogue**
★★★★




**BİRİM
PLASTİK**



ELECTRIC FENCE systems

Installation Guide

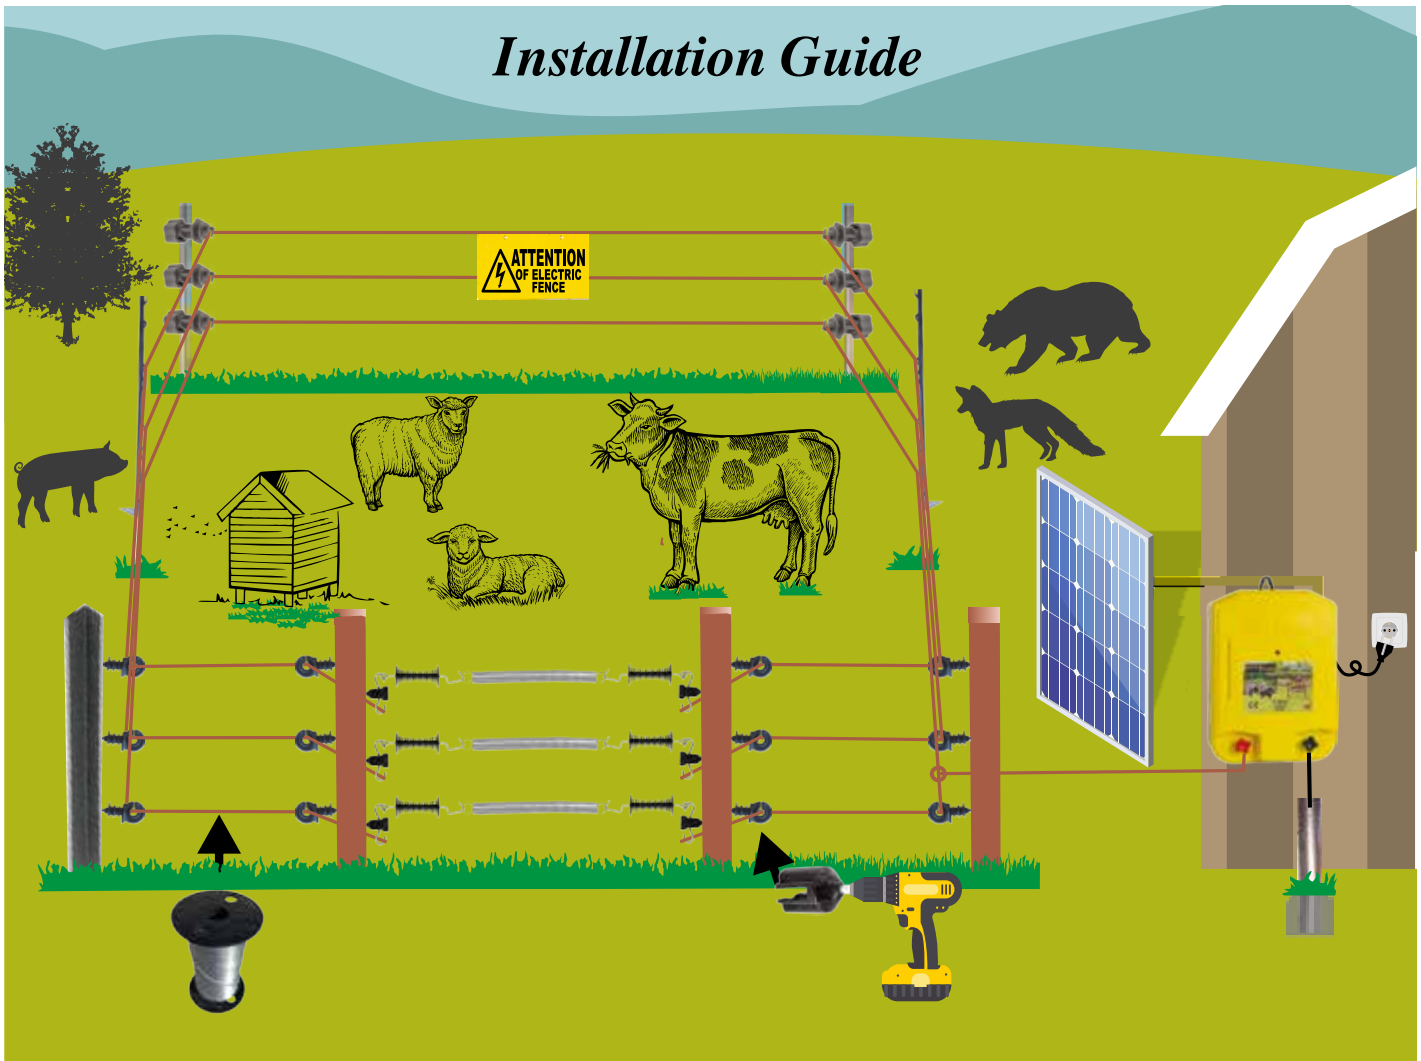

No Worries, Your Farm is in Safe

“Safe Farm” Electric Fence Systems protect your crop, hives and animals. System keeps wild animals out and holds farm animals inside.

Height of the Wires		
Aim	# Rows	Heights
Bear Protection	4	25 cm / 50 cm / 75 cm / 100 cm
Pig Protection	3	30 cm / 50 cm / 80 cm
Small Cattle Limitation	4	20 cm / 40 cm / 60 cm / 80 cm
Cattle Limitation	2	50 cm / 100 cm

Post Distances	
Land Type	Post Distance
Regular	4 meter
Grassy	3 meter
Inclined	2 meter



STANDARD MACHINES

Code	Model Name	E-in	E-out (Joule)	Max Voltage	V (500 Ohm)	Range (km)	Consumption (Watt)
SF1-A	Safe2000	2 Joule	1,5	12.000 Volt	6400	15	4
SF1-B	Safe4000	4 Joule	3,2		7200	30	7
SF1-D	Safe6000	6 Joule	5,1		8000	45	9
SF1-E	Safe8000	8 Joule	6,2		8900	60	11
SF1-H	Safe10000	10 Joule	7,5		9600	75	14

ECO MACHINES

Code	Model Name	E-in	E-out (Joule)	Max Voltage	V (500 Ohm)	Range (km)	Consumption (Watt)
SF1-G	Eco500	0,5 Joule	0,35	6.000 Volt	2500	2,5	1
SF1-F	Eco1000	1 Joule	0,7	12.000 Volt	4800	5	2



KOMPAKT MACHINES

Code	Model Name	E-in	E-out (Joule)	Battery	Panel
SF4-C	Kompack600	6 Joule	5,1	25 Ah	50 Watt
SF4-B	Kompack400	4 Joule	3,2	14 Ah	25 Watt
SF5-B	Kompack200	2 Joule	1,5	9 Ah	12 Watt
SF6-B	Kompack40	4 Joule	3,2	25 Ah	No



All models can be produced as “night-mode”

BATTERY PANEL SYSTEMS

Code	Battery	Panel
SF2-A	9 Ah	12 Watt
SF2-B	14 Ah	25 Watt





PE-REINFORCED WIRES

Code	Model Name	Colour	Length (meter)	Stainless Steel	Diameter	Breaking Strength	Conductivity	UV Protection
SF3-A	ECO	Orange	250 / 500	2x0,15 mm	2 mm	100 kg	12 Ohm/m	No
SF3-F	STANDARD	Blue	250 / 500	2x0,15 mm	3 mm	160 kg	12 Ohm/m	2 Years
SF3-B	PRO	Red	250 / 500	3x0,15 mm	4 mm	200 kg	3,6 Ohm/m	4 Years



GALVANISED WIRES

Code	Model Name	Colour	Length (meter)	Steel	Breaking Strength	Conductivity
SF3-C	Galv 1,0	Gray	250 / 500 / 1000	1,0 mm	180 kg	5,8 Ohm/m
SF3-D	Galv 1,25	Gray	250 / 500 / 1000	1,25 mm	300 kg	3,2 Ohm/m



POLYTAPES

Code	Model Name	Colour	Length (meter)	Stainless Steel	Breaking Strength	Conductivity	UV Protection
SF3-E	Band B	Blue	200	5x0,15 mm	90 kg	6 Ohm/m	2 Year
SF3-E2	Band W	White	200	5x0,15 mm	90 kg	6 Ohm/m	No



RING MODELS



C1-E
Screw Insulator
(Black)



C1-A1
Screw Insulator
(Colour)



C1-A2
Insulator
(Bolt-Nut)



C1-D
Insulator
(Long)

OTHER MODELS



C4
Rod Insulator
(Diameter
10-18mm)



C4 A
Rod Insulator
(Diameter
8-14mm)



C2
Nail Insulator



C9
Practical
Insulator



C10
Mesh-Wire
Insulator



C11
Egg Insulator



C16
Corner Insulator




C12
Band Wire
Insulator



C13
Claw Insulator



PLASTIC POSTS

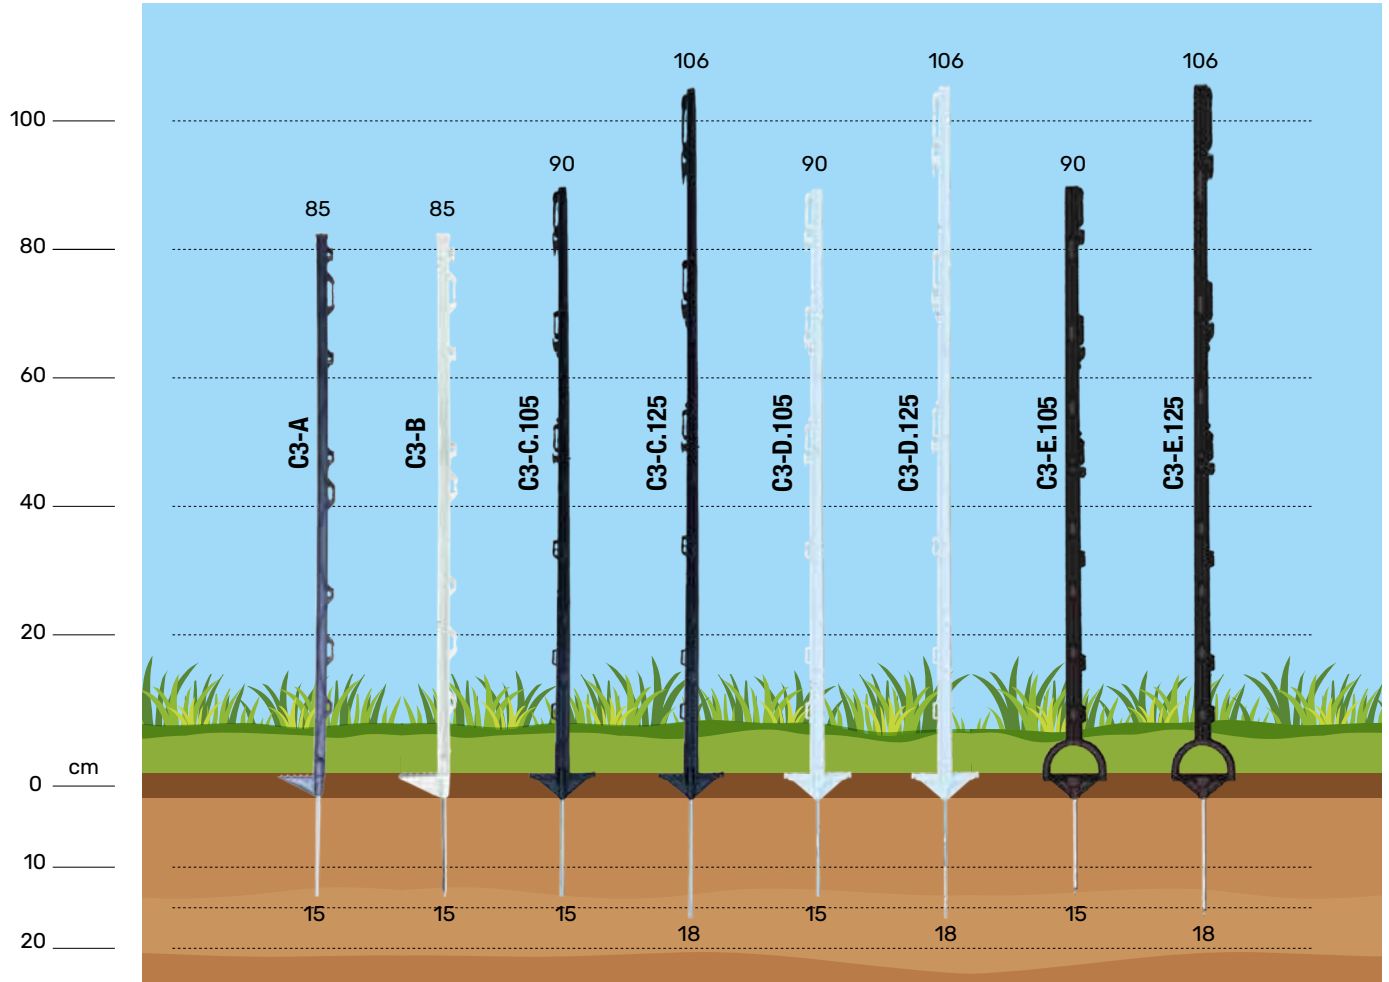

DOOR GROUP



C6-A
Gate Handle (Black)

C6-A
Gate Handle (Colour)




C6-B
Gate Insulator
(Black)



C6-B
Gate Insulator
(Colour)



C6-C
Gate Spring
(30mm)

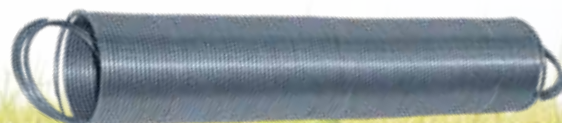

C6-C
Gate Spring
(50mm)



C5
Screwing Apparatus



CA-1
Grounding Rod



CA-2
Wire Strainer




CA-8
Lightning Repellent



C-7
Warning Sign



CA-4
Energy Connection Cable

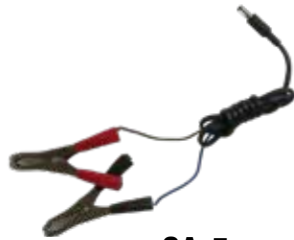

CA-5
Battery Connection Cable



CA-6
Adapter (2A)



CA-7
Battery Charger

CERTIFICATES





TRAILER equipments



WATER TANK GROUP		TOOLBOX GROUP	
PRODUCT	PHOTO	PRODUCT	PHOTO
WATER TANK 30 lt.		TOOLBOX 40 cm	
WATER TANK 30 lt. ECO		TOOLBOX 50 cm	
WATER TANK 50 lt.		TOOLBOX 60 cm	
WATER TANK TIRSAN MODEL		TOOLBOX 80 cm	
WATER TANK KRONE MODEL		TOOLBOX 100 cm	

INJECTION GROUP

SAFE FARM



Aluminum Barrier
Cover - 15 cm



Aluminum Barrier
Cover - 46 cm



Barrier Tap



Handle



Tap



Handle M8 / M10



Soap Dish



Nut Cover



Locker

REFERENCES



SAFE FARM

Since
2011

EXPORT DESTINATIONS



New Zealand



Azerbaijan



Georgia



Russia



Germany



Greece



Serbia



Croatia



United Kingdom



Bosnia



Romania



Brasilien



Spain



Macedonia



Italy



Taiwan



Bulgaria



Kenya



Slovenija



Saudi Arabia



birimplastik



info@birimplastik.com



www.birimplastik.com



Kayapa Mh. Ortanca Sk. No: 1
Nilüfer / BURSA - TÜRKİYE



+90 224 443 33 54



+90 532 747 60 48



+90 546 622 92 14

