info@wpmsweden.se(mailto:info@wpmsweden.se)


+46 35 101 400(tel:+4635101400)

( 16:48 in Sweden

(/)



20 HZ

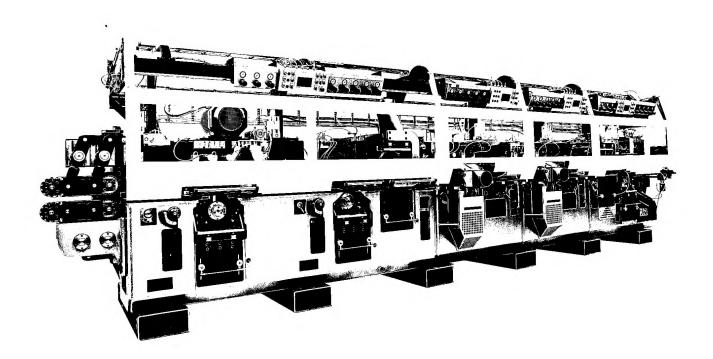

# WPM LARGE - PLANER/MOULDER

Feed speed max 250 m/min (option 350/450 m/min)

The concept of our planers/molders are based on clever, stable design, which allows multiple configurations in the same machine base. Always with a long term perspective, where the machine can be rebuilt for future production when meeting new markets, products and demands. Read more >>

The multiple control panels located on the machine secures full flexibility and faster setting.

There are no standard components that are specially made for WPM. All units are available from the machine supplier but can also be obtained on the open market.

# ZOOM

# **HIGHLIGHTS**

- ✓ Speeds up to 450 m per minute
- Configurable spindle number and combinations
- Superior tech level

# **SPECIFICATIONS**

- Working width: max 300 mm
- Working height: max 120 mm (option 150 mm)
- Feed speed: max 250 m/min (option 350/450 m/min)
- Feed rollers, diameter: top/bottom 260 mm

# Read more >>

- Feed, frequency drive: one motor/gear box per roller pair
- Spindle diameter: 45mm/50mm/60mm/70mm as requested
- Spindle revolutions: frequency driven, variable 3000–6000 rpm
- Spindle settings: motor driven axial and radial settings
- Spindle outboard bearings: hydraulic bearings for all horizontal spindles
- Spindle clamping: hydraulic/pneumatic
- Jointers: straight or profile as an option, motor driven
- Table lubrication: automatic
- Central lubrication: automatic
- Electrical equipment: cubicle and control desks with cables to the machine included
- Positioning: electrical by servo motors and absolute sensors
- Quick setting: spindles with matching presses, beams and fences are positioned
- Safety/machine cabin: protection cabin with interlocking functions (noise reduction as option)